



OBSOLETE - PART DISCONTINUED

Features

- Input Voltage Range: 0.9~6V
- PWM/PFM Switching Control
- High Efficiency: 90%
- Oscillator Frequency: 300kHz (±15%)
- Stand-by Current: $I_{STB} = 3\mu A$ (Typ.)
- **Lead-Free Finish; RoHS Compliant (Notes 1 & 2)**
- **Halogen and Antimony Free. "Green" Device (Note 3)**
- **For automotive applications requiring specific change control (i.e. parts qualified to AEC-Q100/101/200, PPAP capable, and manufactured in IATF 16949 certified facilities), please [contact us](#) or your local Diodes representative.**
<https://www.diodes.com/quality/product-definitions/>

General Description

The AP1624 is a multi-functional step-up DC/DC controller. Large output current is possible using an externally connected N channel MOSFET, coil, and diode.

Output voltage (V_{OUT}) is programmable with 1.23V of standard voltage supply internal, and using externally connected components, output voltage (FB) can be set up at will.

With a 300KHz switching frequency, the size of the external components can be reduced.


Control switches from PFM to PWM during light loads with the AP1624 (PFM/PWM switchable) and the series is highly efficient from light loads to large output currents.

During stand-by time (CE pin "Low"), current consumption is reduced to $3\mu A$.

Applications

- Electronic Information Organizers
- Palmtops
- Cellular and Portable Phones
- Portable Audio Systems
- Various Multi-function Power Supplies

Ordering Information

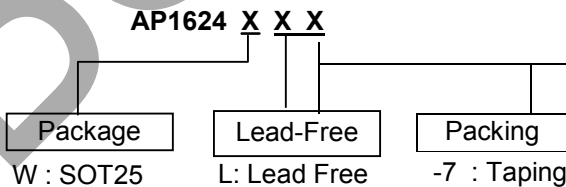


- Note:
1. EU Directive 2002/95/EC (RoHS), 2011/65/EU (RoHS 2) & 2015/863/EU (RoHS 3) compliant. All applicable RoHS exemptions applied.
 2. See <https://www.diodes.com/quality/lead-free/> for more information about Diodes Incorporated's definitions of Halogen- and Antimony-free, "Green" and Lead-free.
 3. Halogen- and Antimony-free "Green" products are defined as those which contain <900ppm bromine, <900ppm chlorine (<1500ppm total Br + Cl) and <1000ppm antimony compounds.

Device	Package Code	Packaging (Note 4)	7" Tape and Reel	
			Quantity	Part Number Suffix
AP1624W	W	SOT25	3000/Tape & Reel	-7

- Note:
4. Pad layout as shown on Diodes Inc. suggested pad layout document can be found at <https://www.diodes.com/design/support/packaging/diodes-packaging/>.

OBSOLETE - PART DISCONTINUED


Pin Assignments

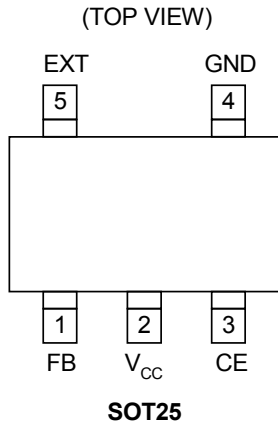

Pin Descriptions

Pin No.	Pin Name	Function
1	FB	Feedback Pin
2	V _{CC}	IC Power Supply Pin
3	CE	Chip Enable: H: Enable L: Disable
4	GND	GND Pin
5	EXT	External N-MOSFET Connection

Block Diagram

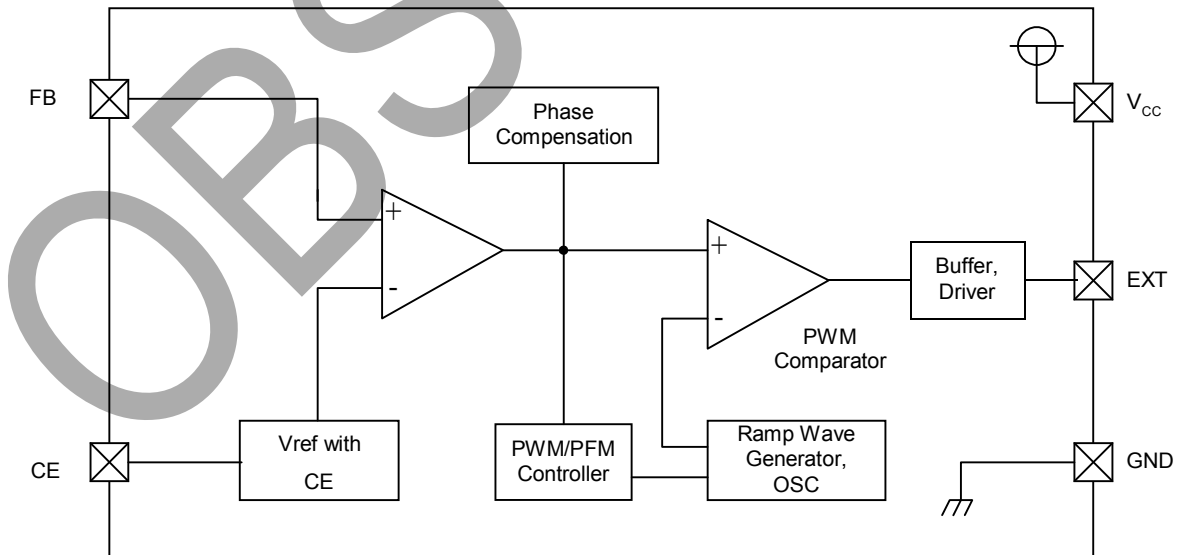

Absolute Maximum Ratings

$T_A = 25^\circ\text{C}$

Parameter	Symbol	Ratings	Units
V_{IN} Pin Voltage	V_{CC}	-0.3 ~ 6.5	V
FB Pin Voltage	V_{FB}	-0.3 ~ $V_{CC} + 0.3$	V
CE Pin Voltage	V_{CE}	-0.3 ~ $V_{CC} + 0.3$	V
EXT Pin Voltage	V_{EXT}	-0.3 ~ $V_{CC} + 0.3$	V
EXT Pin Current	I_{EXT}	± 100	mA
Operating Junction Temperature	T_{OP}	-30 ~ +105	$^\circ\text{C}$
Storage Temperature	T_{ST}	-40 ~ +125	$^\circ\text{C}$


Electrical Characteristics
 $V_{IN} = 3.3\text{V}$, $V_{OUT} = 5\text{V}$, Load = 300 mA

 $T_A = 25^\circ\text{C}$


Parameter	Symbol	Conditions	Min.	Typ.	Max.	Units
FB Voltage	V_{FB}		1.205	1.23	1.255	V
Maximum Input Voltage	V_{CC}		6	-	-	V
Supply Current 1	I_{CC1}	No external components, $CE = V_{IN}$, $V_{FB} = 1.5\text{V}$	-	50	100	μA
Supply Current 2	I_{CC2}	No external components, $CE = V_{IN}$, $V_{FB} = 0\text{V}$	-	100	200	μA
Stand-by Current	I_{STB}	No external components, $CE = 0\text{V}$, $V_{FB} = 0.5\text{V}$	-	3	-	μA
Oscillator Frequency	F_{OSC}		200	300	350	KHz
Maximum Duty Cycle	DC_{MAX}	No external components $V_{CC} = 5\text{V}$, $V_{FB} = 0\text{V}$	80	-	-	%
PFM Duty Cycle	DC_{PFM}	No load	15	25	35	%
CE "High" Voltage	V_{CEH}	Apply above 0.65Vcc (min.) to CE, Operating mode	0.65	-	-	*Vcc
CE "Low" Voltage	V_{CEL}	Apply under 0.2Vcc (min.) to CE, Standby mode	-	-	0.20	*Vcc
EXT Source Current	I_{SOURCE}	$V_{CE} = V_{IN}$, $V_{FB} = 0\text{V}$, $V_{EXT} = V_{CC} - 0.4\text{V}$	-	40	-	mA
EXT Sink Current	I_{SINK}	$V_{CE} = V_{IN}$, $V_{FB} = 2\text{V}$, $V_{EXT} = 0.4\text{V}$	-	70	-	mA
Efficiency	η		-	90	-	%

Typical Application Circuit


(1) Normal Circuit

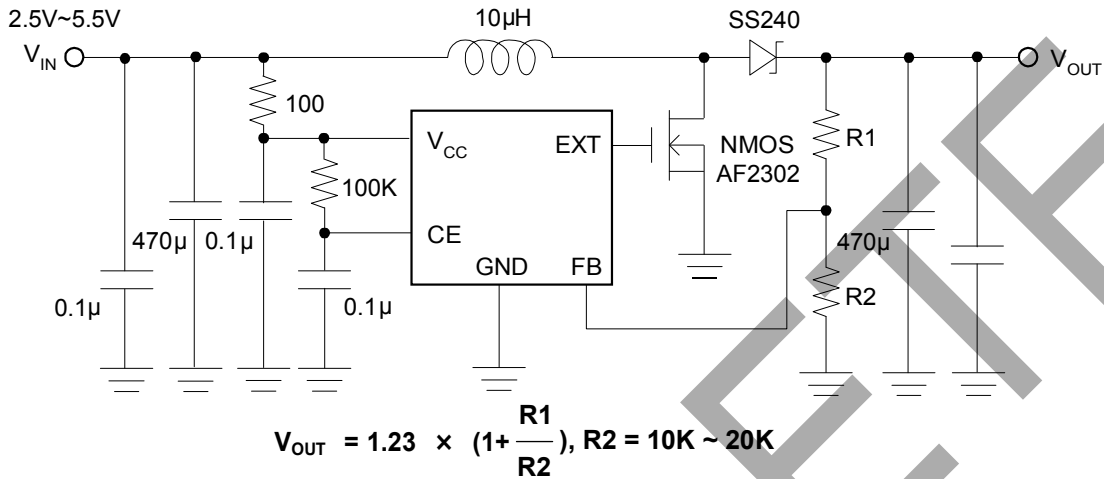

(2) LV Circuit






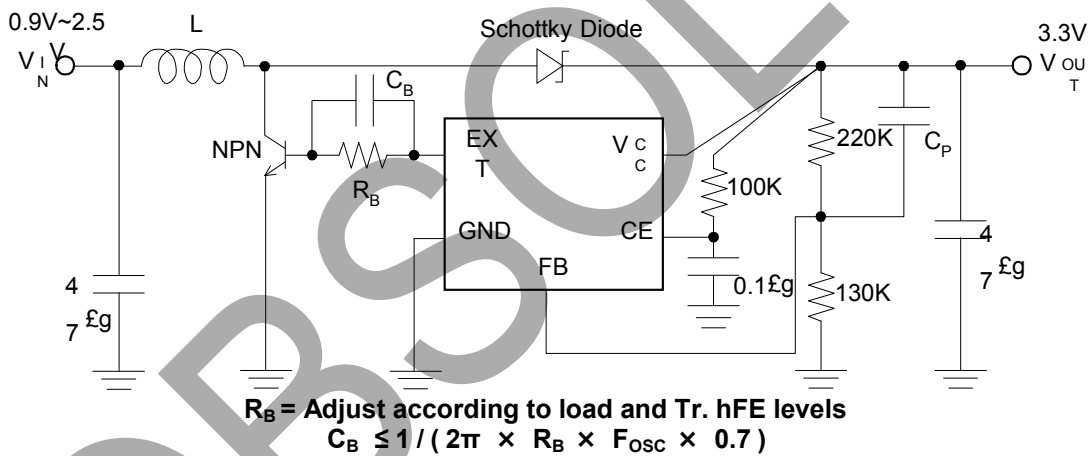


(3) HV Circuit




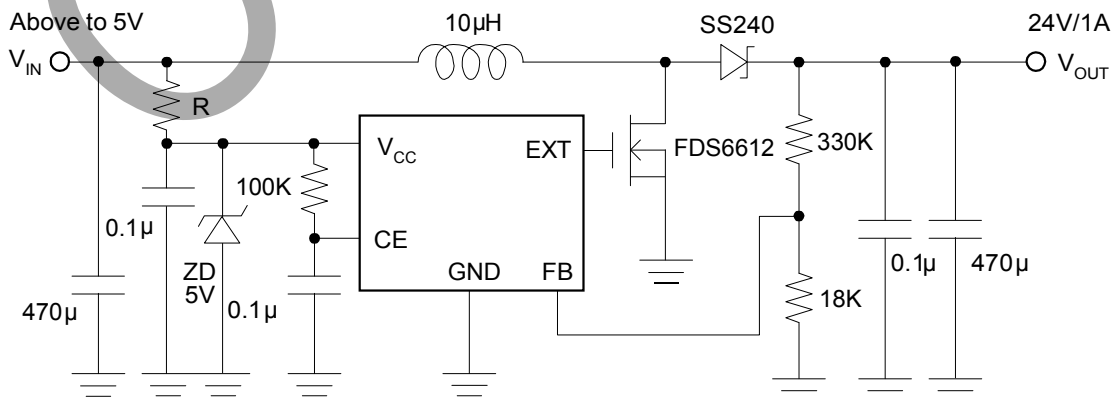


OBSOLETE - PART DISCONTINUED


Typical Performance Characteristics

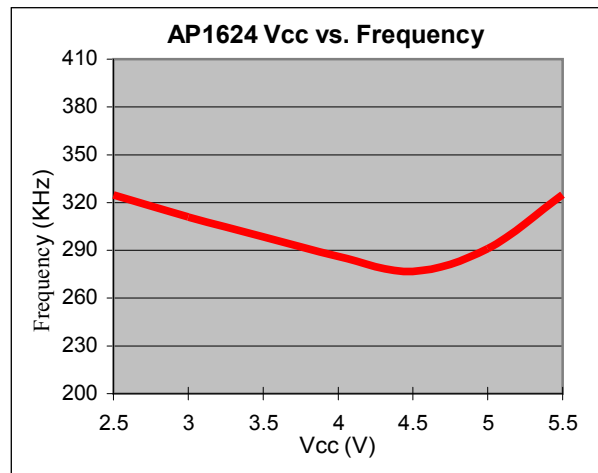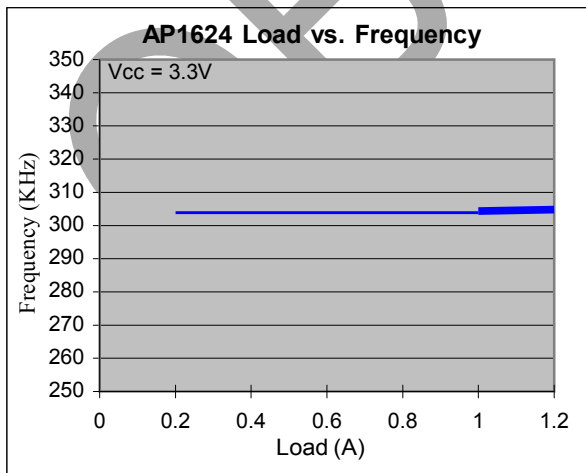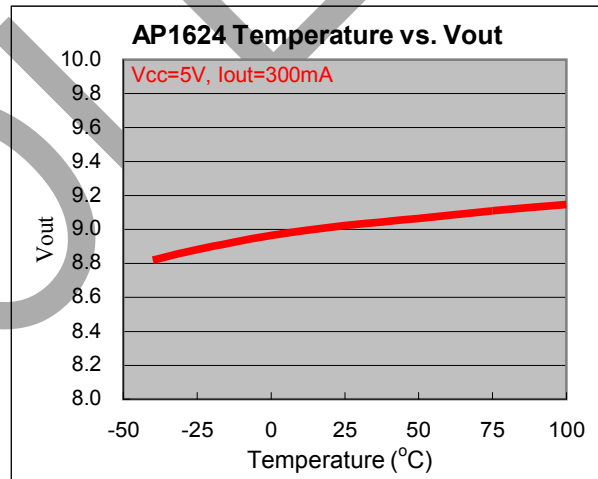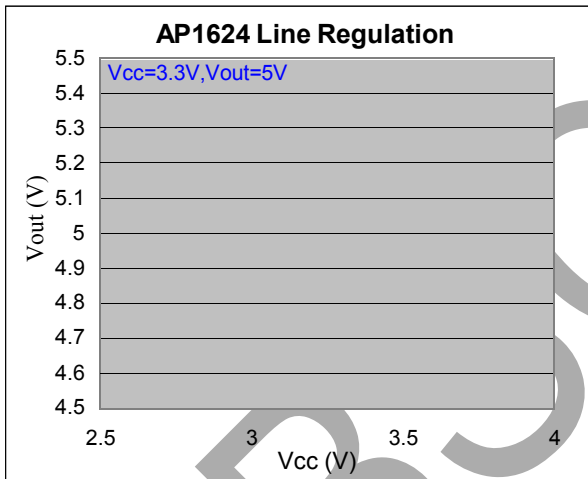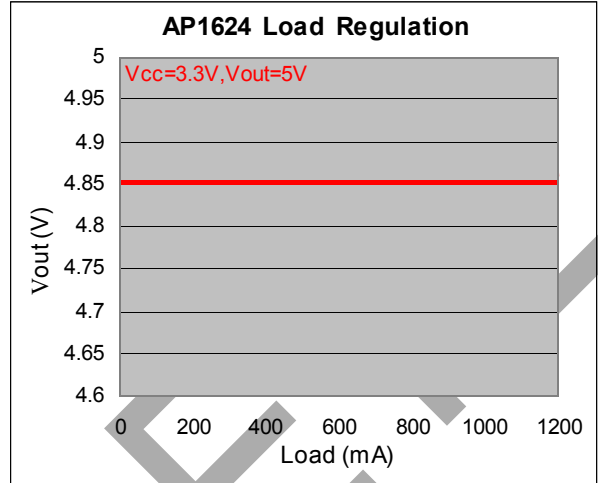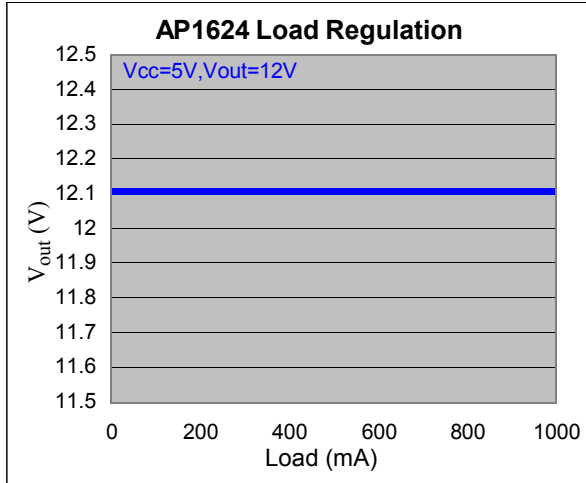

Typical Performance Characteristics (Continued)

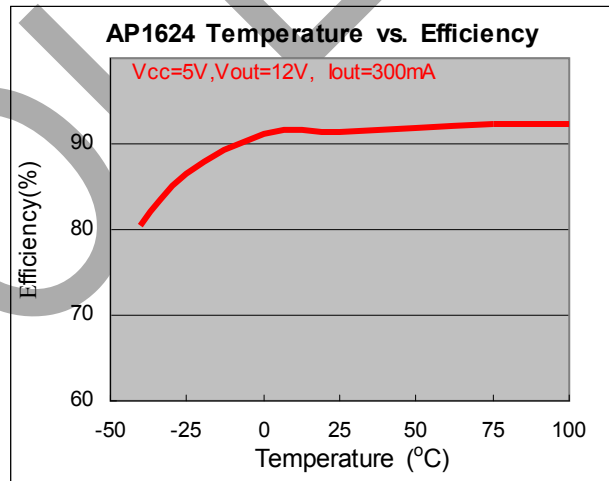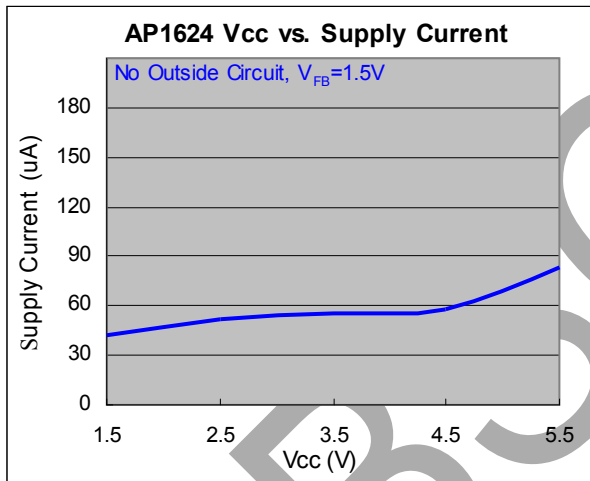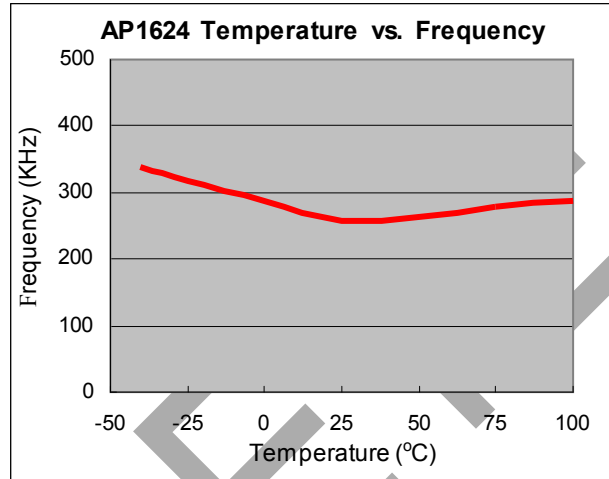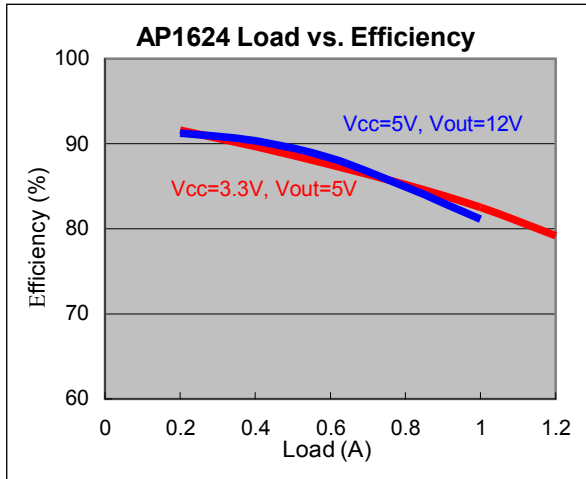

Marking Information




XX: Identification code
Y: Year: 0-9
M: Month: A~L

Part Number	Package	Identification Code
AP1624	SOT25	EQ

OBSOLETE - PART DISCONTINUED

Package Information (unit: mm)

Package Type: SOT25

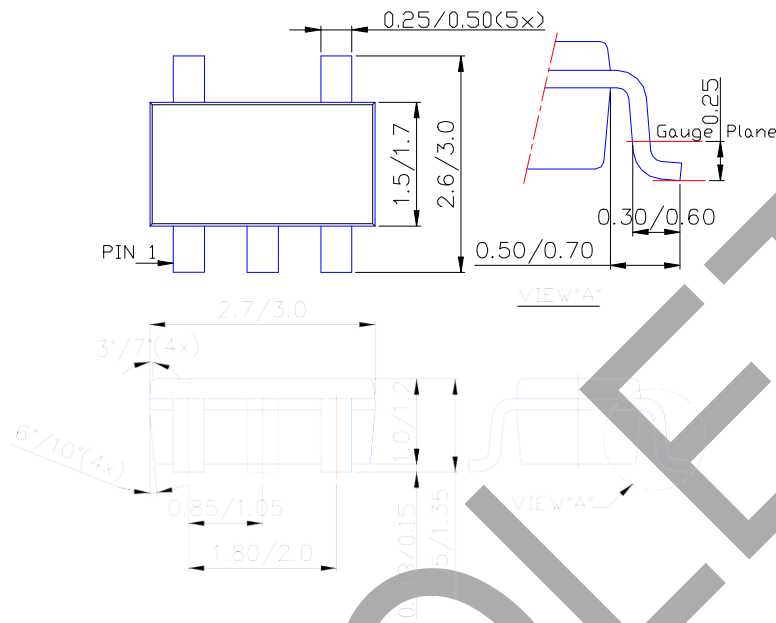

OBSOLETE - PART DISCONTINUED

OBSOLETE

IMPORTANT NOTICE

DIODES INCORPORATED MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARDS TO THIS DOCUMENT, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION).

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to this document and any product described herein. Diodes Incorporated does not assume any liability arising out of the application or use of this document or any product described herein; neither does Diodes Incorporated convey any license under its patent or trademark rights, nor the rights of others. Any Customer or user of this document or products described herein in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on Diodes Incorporated website, harmless against all damages.

Diodes Incorporated does not warrant or accept any liability whatsoever in respect of any products purchased through unauthorized sales channel.

Should Customers purchase or use Diodes Incorporated products for any unintended or unauthorized application, Customers shall indemnify and hold Diodes Incorporated and its representatives harmless against all claims, damages, expenses, and attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized application.

Products described herein may be covered by one or more United States, international or foreign patents pending. Product names and markings noted herein may also be covered by one or more United States, international or foreign trademarks.

This document is written in English but may be translated into multiple languages for reference. Only the English version of this document is the final and determinative format released by Diodes Incorporated.

LIFE SUPPORT

Diodes Incorporated products are specifically not authorized for use as critical components in life support devices or systems without the express written approval of the Chief Executive Officer of Diodes Incorporated. As used herein:

A. Life support devices or systems are devices or systems which:

1. are intended to implant into the body, or
2. support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in significant injury to the user.

B. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or to affect its safety or effectiveness.

Customers represent that they have all necessary expertise in the safety and regulatory ramifications of their life support devices or systems, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of Diodes Incorporated products in such safety-critical, life support devices or systems, notwithstanding any devices- or systems-related information or support that may be provided by Diodes Incorporated. Further, Customers must fully indemnify Diodes Incorporated and its representatives against any damages arising out of the use of Diodes Incorporated products in such safety-critical, life support devices or systems.

Copyright © 2020, Diodes Incorporated

www.diodes.com