

OBSOLETE – PART DISCONTINUED

## Description

The AZ4052 is high-speed si-gate CMOS device. The AZ4052 is dual 4-channel analog multiplexers or demultiplexers with common select logic. Each multiplexer has four independent inputs/outputs (pins nY0 to nY3) and a common input/output (pin nZ). The common channel select logics include two digital select inputs (pins S0 and S1) and an active LOW enable input (pin  $\bar{E}$ ). When pin  $\bar{E}$  = LOW, one of the four switches is selected (Low-impedance On-state) with pins S0 and S1. When pin  $\bar{E}$  = HIGH, all switches are in the high-impedance Off-state, independent of pins S0 and S1.  $V_{CC}$  and GND are the supply voltage pins for the digital control inputs (pins S0, S1 and  $\bar{E}$ ). The  $V_{CC}$  to GND ranges are 3.0V to 10V. The analog inputs/outputs (pins nY0 to nY3 and nZ) can swing between  $V_{CC}$  as a positive limit and  $V_{EE}$  as a negative limit.  $V_{CC}$ - $V_{EE}$  may not exceed 10V. For operation as a digital multiplexer/demultiplexer,  $V_{EE}$  is connected to GND (Typically Ground).

The AZ4052 is available in standard packages of SOIC-16 and DIP-16.

## Features

- Wide Operation Voltage:  $\pm 5.0V$  or 10V
- Low On-resistance:
  - 55 $\Omega$  (Typ.) at  $V_{CC}$ - $V_{EE}$  = 5V
  - 40 $\Omega$  (Typ.) at  $V_{CC}$ - $V_{EE}$  = 10V
- Ultra Low THD+N: 0.003% @ 10V, 0.008% @ 5.0V
- Ultra Low Crosstalk: -120dB
- Ultra Low Noise: 6.0 $\mu V_{RMS}$
- Operating Temperature: -40°C to +85°C
- **Totally Lead-Free & Fully RoHS Compliant (Notes 1 & 2)**
- **Halogen and Antimony Free. "Green" Device (Note 3)**

## Applications

- LCD TV/PDP TV/CRT TV
- 4:1 Multi-channel Signal Selecting


## Function Table

Control Input			On Channel	
$\bar{E}$	S1	S0	-	
L	L	L	nY0	nZ
L	L	H	nY1	nZ
L	H	L	nY2	nZ
L	H	H	nY3	nZ
H	X	X	None	

- Notes:
1. No purposely added lead. Fully EU Directive 2002/95/EC (RoHS) & 2011/65/EU (RoHS 2) compliant.
  2. See [http://www.diodes.com/quality/lead\\_free.html](http://www.diodes.com/quality/lead_free.html) for more information about Diodes Incorporated's definitions of Halogen- and Antimony-free, "Green" and Lead-free.
  3. Halogen- and Antimony-free "Green" products are defined as those which contain <900ppm bromine, <900ppm chlorine (<1500ppm total Br + Cl) and <1000ppm antimony compounds.


## Pin Assignments

(Top View)

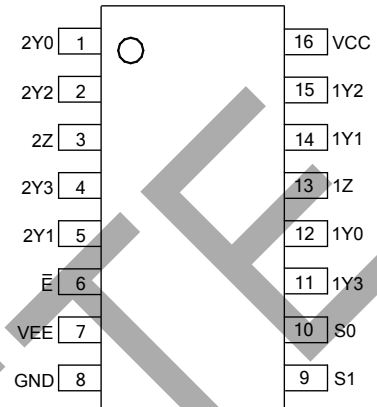


SOIC-16

(Top View)

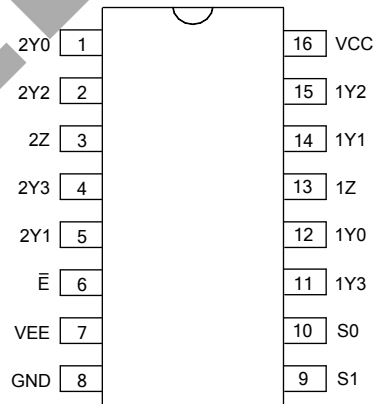

DIP-16

**Typical Applications Circuit**

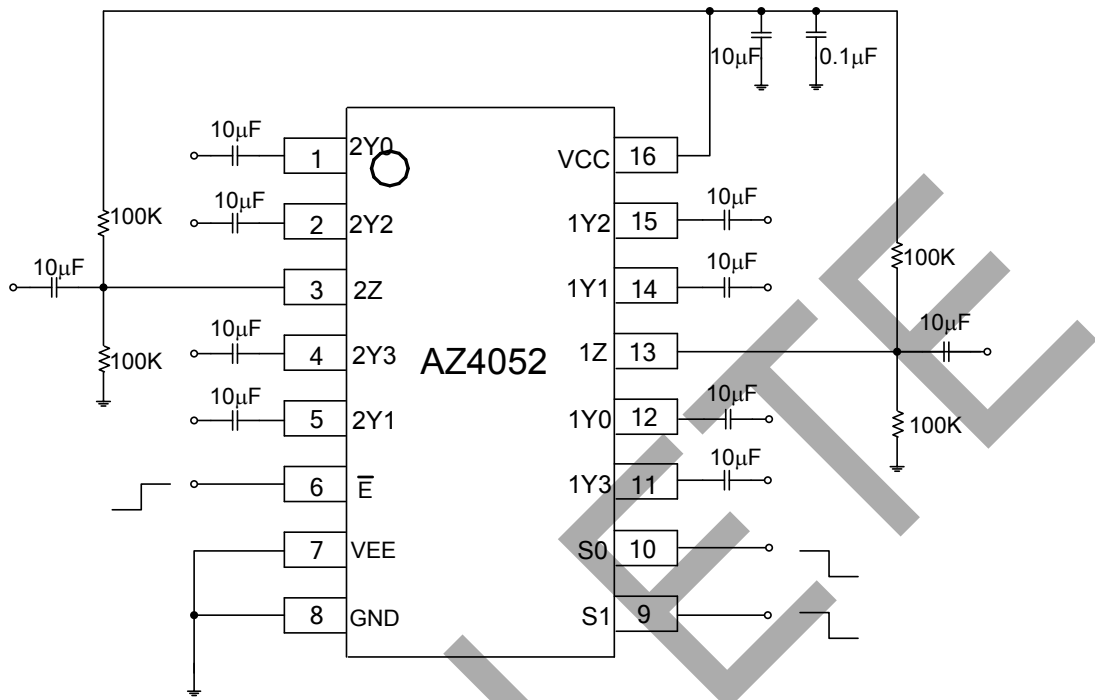


**Pin Description**

Pin Number	Pin Name	Function
1	2Y0	2CH signal input or output terminal 0
2	2Y2	2CH signal input or output terminal 2
3	2Z	2CH common signal input or output terminal
4	2Y3	2CH signal input or output terminal 3
5	2Y1	2CH signal input or output terminal 1
6	$\bar{E}$	Enable input (Active LOW)
7	VEE	Negative supply voltage
8	GND	Ground (0V)
9	S1	Select logic input terminal 1
10	S0	Select logic input terminal 0
11	1Y3	1CH signal input or output terminal 3
12	1Y0	1CH signal input or output terminal 0
13	1Z	1CH common signal input or output terminal
14	1Y1	1CH signal input or output terminal 1
15	1Y2	1CH signal input or output terminal 2
16	VCC	Positive supply voltage


OBSOLETE - PART DISCONTINUED

OBSOLETE - PART DISCONTINUED

**Functional Block Diagram**

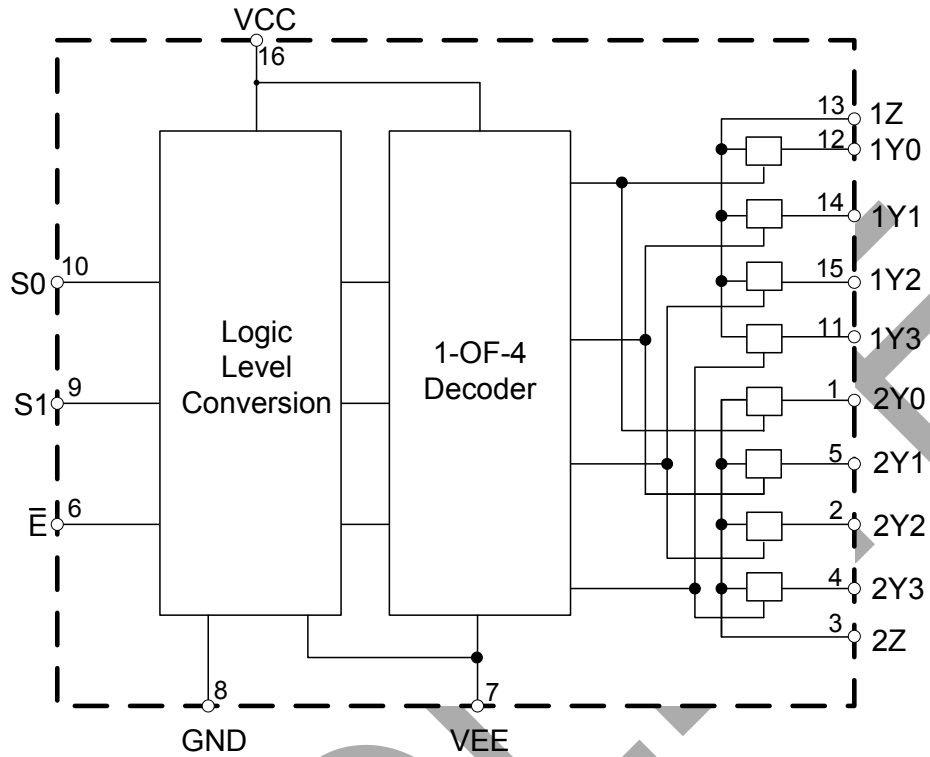

**Schematic Diagram (One Switch)**

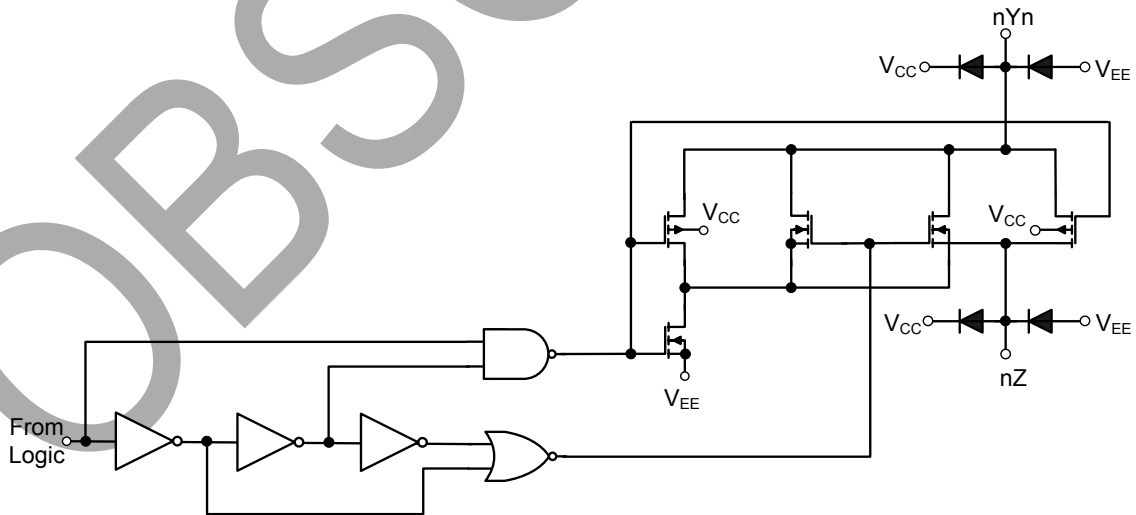

**OBsolete - PART DISCONTINUED**

### Absolute Maximum Ratings (Notes 4 & 5)

Symbol	Parameter	Condition	Rating	Unit
V <sub>CC</sub>	Power Supply Voltage	–	-0.5 to 11.0	V
I <sub>IK</sub>	Input Diode Current	V <sub>I</sub> < -0.5V, V <sub>I</sub> > V <sub>CC</sub> +0.5V	20	mA
I <sub>SK</sub>	Switch Diode Current	V <sub>S</sub> < -0.5V, V <sub>S</sub> > V <sub>CC</sub> +0.5V	20	mA
I <sub>S</sub>	Switch Current	-0.5V < V <sub>S</sub> < V <sub>CC</sub> +0.5V	25	mA
I <sub>EE</sub>	V <sub>EE</sub> Current	–	20	mA
I <sub>CC</sub> I <sub>GND</sub>	V <sub>CC</sub> Current GND Current	–	50	mA
P <sub>D</sub>	Power Dissipation	T <sub>A</sub> = -40°C to +85°C (Note 6)	500	mW
T <sub>STG</sub>	Storage Temperature Range	–	-65 to +150	°C
T <sub>J</sub>	Operating Junction Temperature Range	–	+150	°C
P <sub>S</sub>	Power Dissipation Per Switch	–	100	mW
–	ESD (Machine Model)	–	100	V
–	ESD (Human Body Model)	–	1,000	V

- Notes:
- Stresses greater than those listed under “Absolute Maximum Ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “Recommended Operating Conditions” is not implied. Exposure to “Absolute Maximum Ratings” for extended periods may affect device reliability.
  - To avoid drawing V<sub>CC</sub> current out of pins nZ, when switch current flows in pins nYn, the voltage drop across the bidirectional switch must not exceed 0.4V. If the switch current flows into pins nZ, no V<sub>CC</sub> current will flow out of pins nYn. In this case there is no limit for the voltage drop across the switch, but the voltages at pins nYn and nZ may not exceed V<sub>CC</sub> or V<sub>EE</sub>.
  - Above +70°C derate linearly with 12mW/K (DIP-16 package). Above +70°C derate linearly with 8mW/K (SOIC-16 package).

### Recommended Operating Conditions

Symbol	Parameter	Condition	Min	Type	Max	Unit
V <sub>IN</sub>	Supply Voltage	V <sub>CC</sub> -GND	3.0	–	10	V
		V <sub>CC</sub> -V <sub>EE</sub>	3.0	–	10	
V <sub>I</sub>	Logic Input Voltage	–	V <sub>EE</sub>	–	V <sub>CC</sub>	V
V <sub>IS</sub> /V <sub>OS</sub>	Switch Signal Input/Output Voltage	–	V <sub>EE</sub>	–	V <sub>CC</sub>	V
T <sub>A</sub>	Operating Ambient Temperature Range	–	-40	–	+85	°C
t <sub>r</sub> , t <sub>f</sub>	Input Rise and Fall Time	V <sub>CC</sub> = 5.0V	–	6.0	400	ns
		V <sub>CC</sub> = 10V	–	6.0	250	

OBSOLETE - PART DISCONTINUED

**Electrical Characteristics**

**DC Characteristics**

$V_{IS}$  is the input voltage at pins nYn or nZ, whichever is assigned as an input;  $V_{OS}$  is the output voltage at pins nZ or nYn, whichever is assigned as an output, voltages are referenced to GND (Ground = 0V).

Symbol	Parameter	Conditions			Min	Typ	Max	Unit
		Other	V <sub>CC</sub> (V)	V <sub>EE</sub> (V)				
V <sub>IH</sub>	High-level Input Voltage	-	5.0	-	2.8	-	-	V
			10	-	6.0	-	-	
V <sub>IL</sub>	Low-level Input Voltage	-	5.0	-	-	-	1.5	V
			10	-	-	-	3.0	
I <sub>LI</sub>	Input Leakage Current	V <sub>I</sub> = V <sub>CC</sub> or GND	5.0	0	-	-	±1.0	µA
			10	0	-	-	±1.0	
I <sub>S</sub> (Off)	Analog Switch Off-state Current	V <sub>I</sub> = V <sub>IH</sub> or V <sub>IL</sub> ,  V <sub>S</sub>   = V <sub>CC</sub> -V <sub>EE</sub> (Figure 1)	5.0	-	-	-	±1.0	µA
			10	0	-	-	±1.0	
			10	0	-	-	±2.0	
I <sub>S</sub> (On)	Analog Switch On-state Current	V <sub>I</sub> = V <sub>IH</sub> or V <sub>IL</sub> ,  V <sub>S</sub>   = V <sub>CC</sub> -V <sub>EE</sub> (Figure 2)	10	0	-	-	±2.0	µA
I <sub>CC</sub>	Quiescent Supply Current	V <sub>I</sub> = V <sub>CC</sub> or GND, V <sub>IS</sub> = V <sub>EE</sub> or V <sub>CC</sub> , V <sub>OS</sub> = V <sub>CC</sub> or V <sub>EE</sub>	5.0	0	-	50	160	µA
			10	0	-	100	320	µA

**Resistance R<sub>ON</sub>**

$V_{IS}$  is the input voltage at pins nYn or nZ, which is assigned as an input ((Note 7) see figure 3)

Symbol	Parameter	Conditions			Min	Typ	Max	Unit	
		Other	V <sub>CC</sub> (V)	V <sub>EE</sub> (V)					I <sub>S</sub> (µA)
R <sub>ON</sub> (Peak)	On-resistance (Peak)	V <sub>IS</sub> = V <sub>CC</sub> to V <sub>EE</sub> , V <sub>I</sub> = V <sub>IH</sub> or V <sub>IL</sub>	5.0	0	1,000	-	73	180	Ω
			10	0	1,000	-	47	120	Ω
R <sub>ON</sub> (Rail)	On-resistance (Rail)	V <sub>IS</sub> = V <sub>EE</sub> , V <sub>I</sub> = V <sub>IH</sub> or V <sub>IL</sub>	5.0	0	1,000	-	55	130	Ω
			10	0	1,000	-	40	100	Ω
		V <sub>IS</sub> = V <sub>CC</sub> , V <sub>I</sub> = V <sub>IH</sub> or V <sub>IL</sub>	5.0	0	1,000	-	61	150	Ω
			10	0	1,000	-	45	110	Ω
R <sub>ON</sub>	Maximum On-resistance Difference Between Any Two Channels	V <sub>IS</sub> = V <sub>CC</sub> to V <sub>EE</sub> , V <sub>I</sub> = V <sub>IH</sub> or V <sub>IL</sub>	5.0	0	-	-	5	-	Ω
			10	0	-	-	6	-	Ω

Note: 7. When supply voltages (V<sub>CC</sub>-V<sub>EE</sub>) near 2.0V the analog switch On-resistance becomes extremely non-linear. When using a supply of 2V, it is recommended to use these devices only for transmitting digital signals.

**Electrical Characteristics** (continued)

**AC Characteristics**

GND = 0V,  $t_r = t_f = 6\text{ns}$ ,  $C_L = 50\text{pF}$

Symbol	Parameter	Conditions			Min	Typ	Max	Unit
		Other	V <sub>CC</sub> (V)	V <sub>EE</sub> (V)				
t <sub>PHL</sub> /t <sub>PLH</sub>	Propagation Delay V <sub>IS</sub> to V <sub>OS</sub>	R <sub>L</sub> = ∞ (Figure 20)	5.0	0	-	15	25	ns
			5.0	-5.0	-	12	25	ns
t <sub>PZH</sub> /t <sub>PZL</sub>	Turn-on Time $\bar{E}$ , Sn to V <sub>OS</sub>	R <sub>L</sub> = 1kΩ (Figure 21 and 22)	5.0	0	-	38	81	ns
			5.0	-5.0	-	26	81	ns
t <sub>PHZ</sub> /t <sub>PLZ</sub>	Turn-off Time $\bar{E}$ , Sn to V <sub>OS</sub>	R <sub>L</sub> = 1kΩ (Figure 21 and 22)	5.0	0	-	27	63	ns
			5.0	-5.0	-	22	48	ns


Recommended conditions and typical values, GND = 0V, T<sub>A</sub> = +25°C, C<sub>L</sub> = 50pF. V<sub>IS</sub> is the input voltage at pins nYn or nZ, whichever is assigned as an input. V<sub>OS</sub> is the output voltage at pins nYn or nZ, whichever is assigned as an output.

Symbol	Parameter	Conditions				Min	Typ	Max	Unit
		Other	V <sub>IS</sub> (p-p) (V)	V <sub>CC</sub> (V)	V <sub>EE</sub> (V)				
d <sub>SIN</sub>	Sine-wave Distortion	f = 1kHz, R <sub>L</sub> = 10kΩ (Figure 4)	0.5	5.0	0	-	0.008	-	%
			1.5	10	0	-	0.003	-	%
		f = 10kHz, R <sub>L</sub> = 10kΩ (Figure 4)	0.5	5.0	0	-	0.008	-	%
			1.5	10	0	-	0.003	-	%
α <sub>OFF</sub> (Feedthrough)	Switch OFF Signal Feed-through	R <sub>L</sub> = 10kΩ, f = 1MHz (Figure 5), V <sub>IS</sub> = 1V <sub>RMS</sub>	-	5.0	0	-	-50	-	dB
			-	5.0	-5.0	-	-50	-	dB
α <sub>CT(S)</sub>	Crosstalk Between Two Channels	R <sub>L</sub> = 10kΩ, f = 1kHz (Figure 6), V <sub>IS</sub> = 1V <sub>RMS</sub>	-	5.0	0	-	-120	-	dB
			-	5.0	-5.0	-	-120	-	dB
	Crosstalk Between Two Switches / Multiplexers	R <sub>L</sub> = 10kΩ, f = 1kHz (Figure 6), V <sub>IS</sub> = 1V <sub>RMS</sub>	-	5.0	0	-	-60	-	dB
			-	5.0	-5.0	-	-60	-	dB
V <sub>CT(P-P)</sub>	Crosstalk Voltage Between Control and Any Switch (Peak-to-peak Value)	R <sub>L</sub> = 10kΩ, f = 1MHz, $\bar{E}$ or Sn, Square-wave Between V <sub>CC</sub> and GND, $t_r = t_f = 6\text{ns}$ (Figure 7)	-	5.0	0	-	110	-	mV
f <sub>MAX</sub>	Frequency Response (-3dB)	R <sub>L</sub> = 10kΩ (Figure 4)	-	5.0	0	-	70	-	MHz
			-	5.0	-5.0	-	70	-	MHz
V <sub>NOISE</sub>	Output Noise Voltage	A-weighted	-	5.0	0	-	6.0	-	μV <sub>RMS</sub>


OBSOLETE - PART DISCONTINUED

**Typical Test Circuit**


OBSOLETE - PART DISCONTINUED

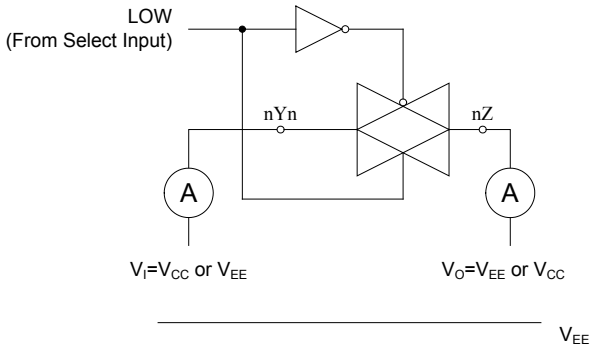


**Figure 1. Test Circuit for Measuring OFF-state Current**

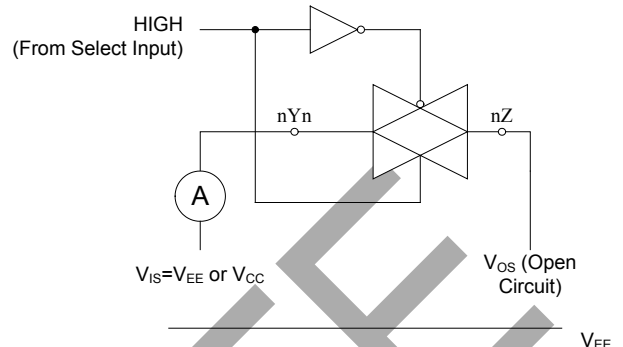


**Figure 2. Test Circuit for Measuring ON-state Current**

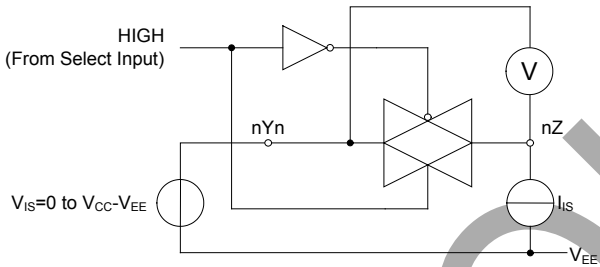


**Figure 3. Test Circuit for Measuring Ron**

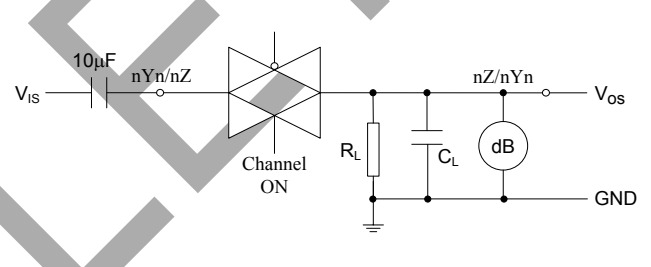


**Figure 4. Test Circuit for Measuring Sine-wave Distortion and Minimum Frequency Response**

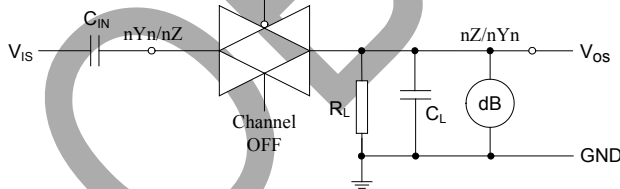

**Figure 5. Test Circuit for Measuring Switch Off Signal Feed-through**

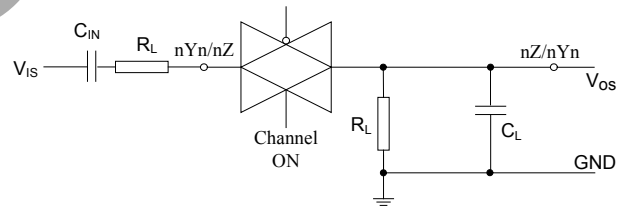

(a) Channel ON Condition

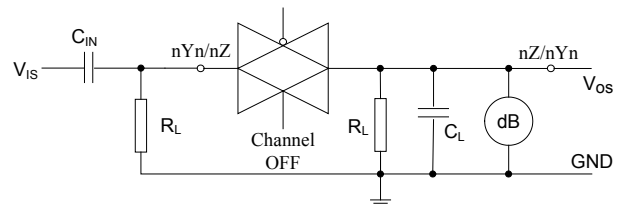


(b) Channel OFF Condition

**Figure 6. Test Circuits for Measuring Crosstalk between Any Two Switches/Multiplexers**


OBSOLETE - PART DISCONTINUED

**Typical Test Circuit** (continued)

The crosstalk is defined as follows (oscilloscope output):

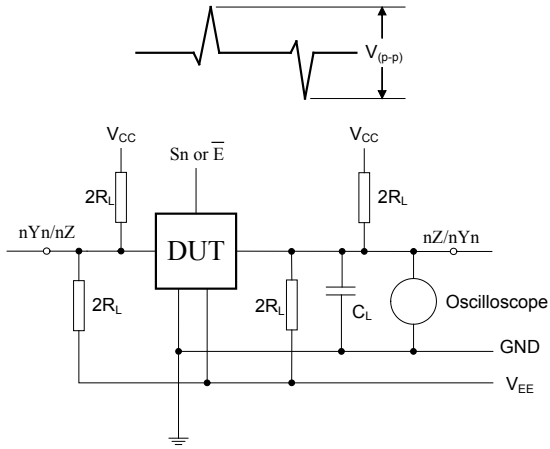


**Figure 7. Test Circuit for Measuring Crosstalk Performance**

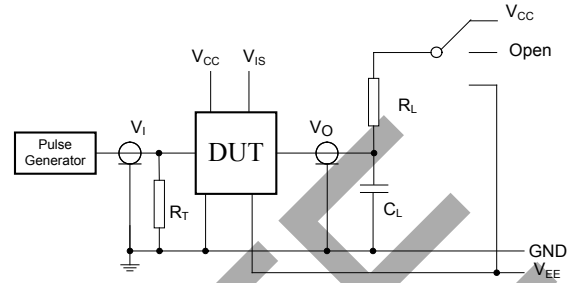


**Figure 8. Test Circuit for Measuring AC between Control and Any Switch**


**Performance Characteristics**

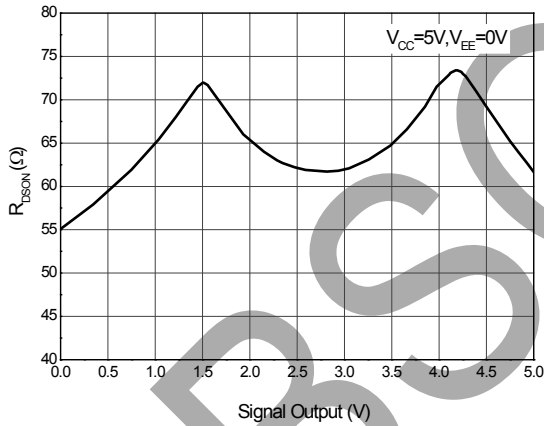


**Figure 9. RDSON vs. Signal Output**

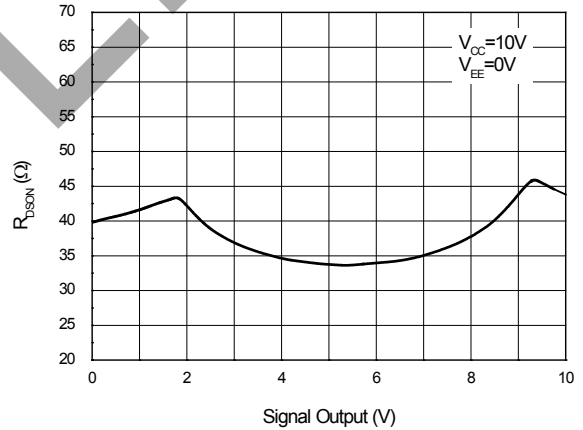

**Figure 10. RDSON vs. Signal Output**

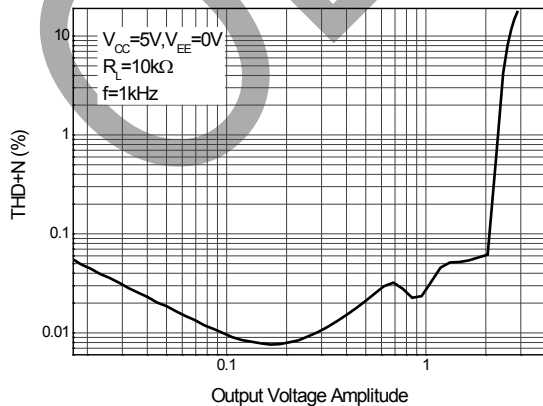

**Figure 11. THD+N vs. Output Voltage Amplitude**

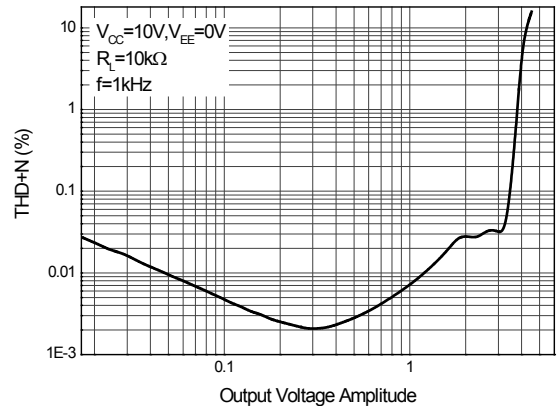


**Figure 12. THD+N vs. Output Voltage Amplitude**




**Performance Characteristics** (continued)


OBSOLETE - PART DISCONTINUED

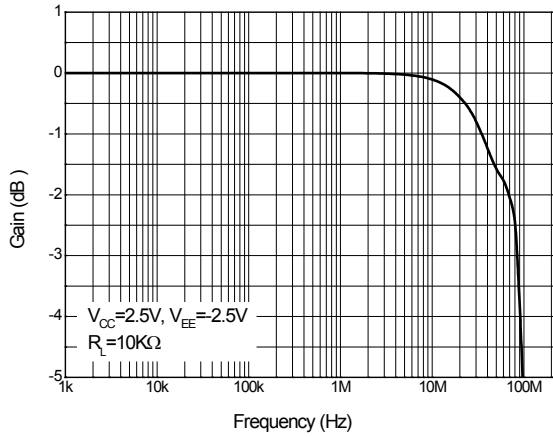


**Figure 13. Frequency Response**

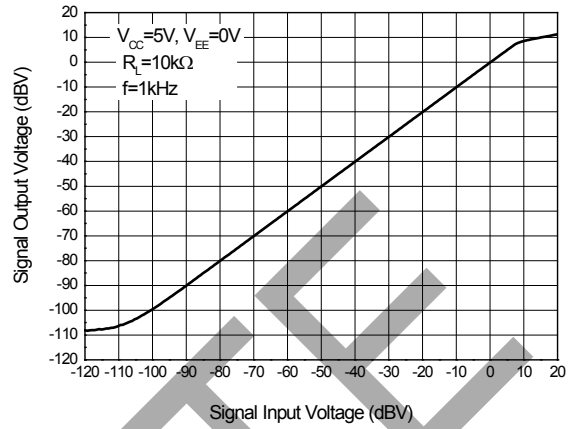


**Figure 14. Linear Range**

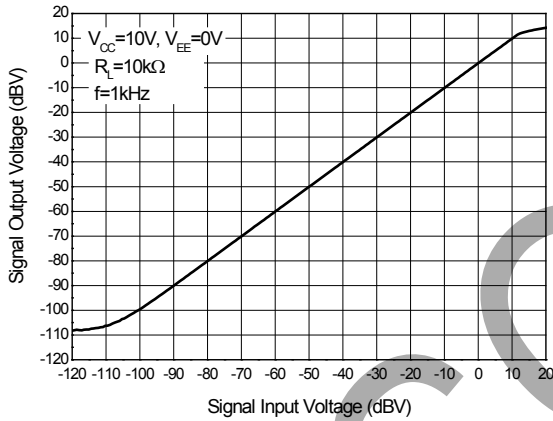


**Figure 15. Linear Range**

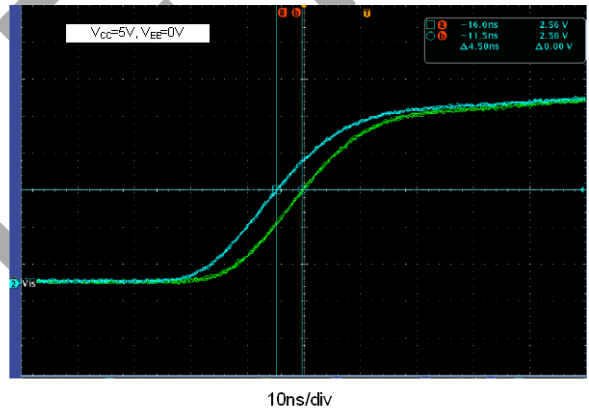

**Figure 16. Propagation Delay**

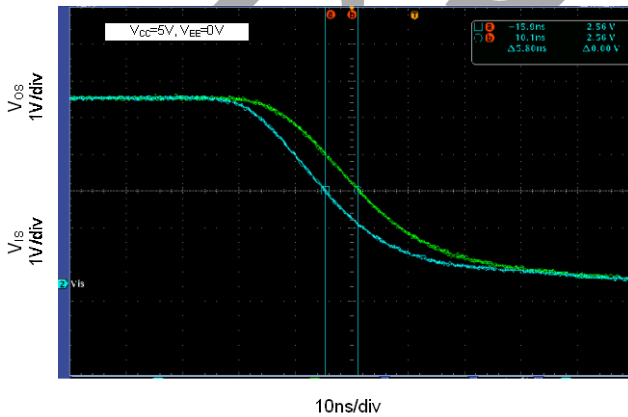


**Figure 17. Propagation Delay**

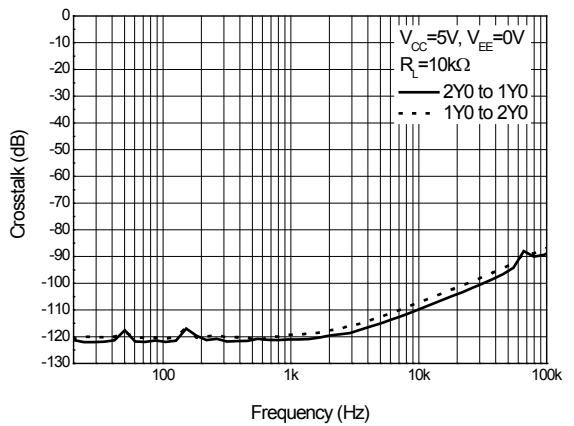


**Figure 18. Crosstalk vs. Frequency**

**Performance Characteristics (cont.)**


OBSOLETE - PART DISCONTINUED

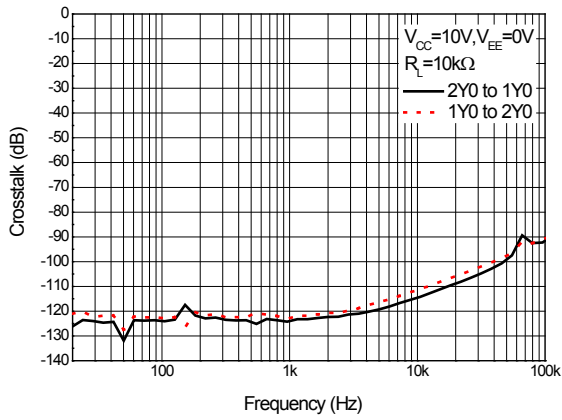


**Figure 19. Crosstalk vs. Frequency**

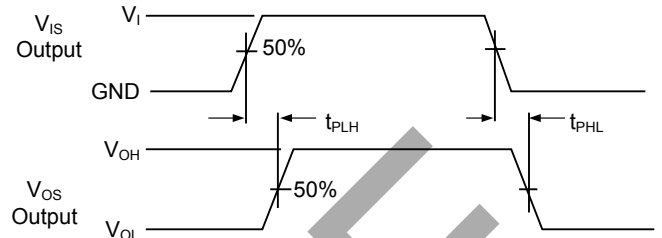

**Figure 20. Waveforms Showing the Input ( $V_{IS}$ ) to Output ( $V_{OS}$ ) Propagation Delays**

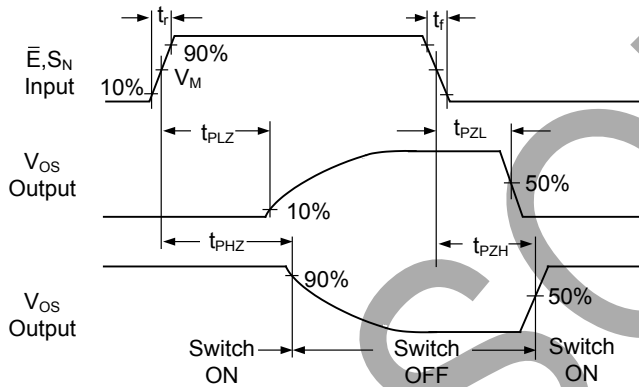

**Figure 21. Waveforms Showing the Turn-on and Turn-off Times ( $V_M = 50\%$ ,  $V_I = GND$  to  $V_{CC}$ )**

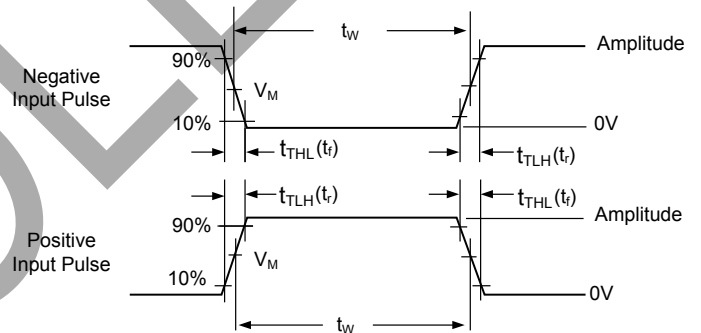


**Figure 22. Input Pulse Definitions**

Amplitude	$V_M$	$t_r$ and $t_f$	
		$F_{max}$ Pulse Width	Other
$V_{CC}$	50%	<2ns	6ns


OBSOLETE - PART DISCONTINUED

**Ordering Information**

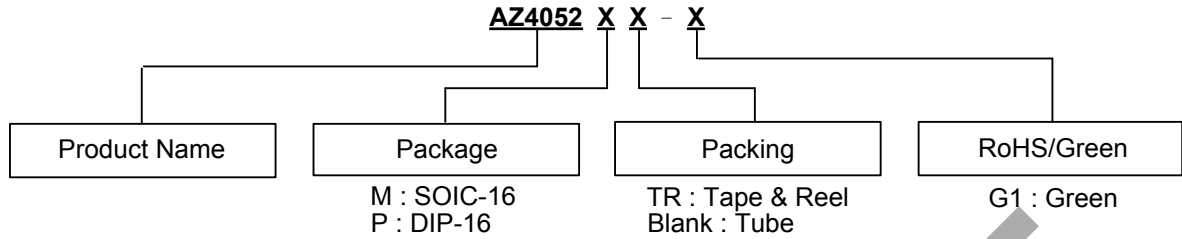


Package	Temperature Range	Part Number	Marking ID	Packing
SOIC-16	-40 to +85°C	AZ4052M-G1	AZ4052M-G1	25/Tube
		AZ4052MTR-G1	AZ4052M-G1	4,000/13"/ Tape & Reel
DIP-16	-40 to +85°C	AZ4052P-G1	AZ4052P-G1	25/Tube

**DIP16 Marking Information:**

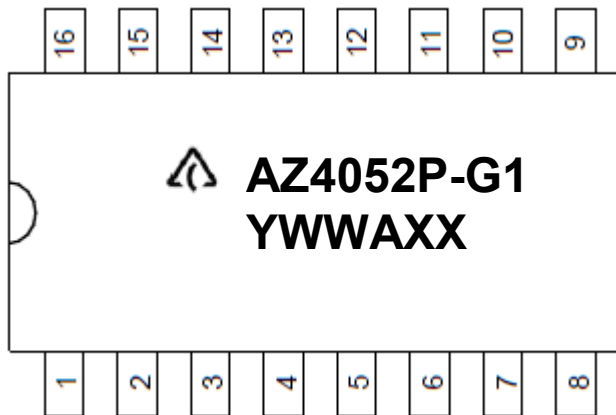

First line: Logo and Marking ID  
 Second line: Date Code  
 Y: year  
 WW: work week of molding  
 A: assembly house code  
 XX: 7<sup>th</sup> and 8<sup>th</sup> digits of Batch Number

**SOIC16 Marking Information:**

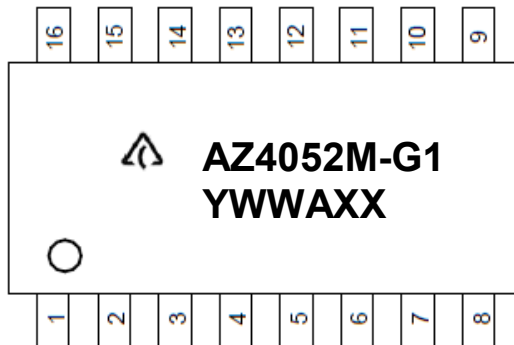


First line: Logo and Marking ID  
 Second line: Date Code  
 Y: year  
 WW: work week of molding  
 A: assembly house code  
 XX: 7<sup>th</sup> and 8<sup>th</sup> digits of Batch Number

**Package Outline Dimensions** (All dimensions in mm(inch).)

Please see <http://www.diodes.com/package-outlines.html> for the latest version.

(1) Package Type: SOIC-16

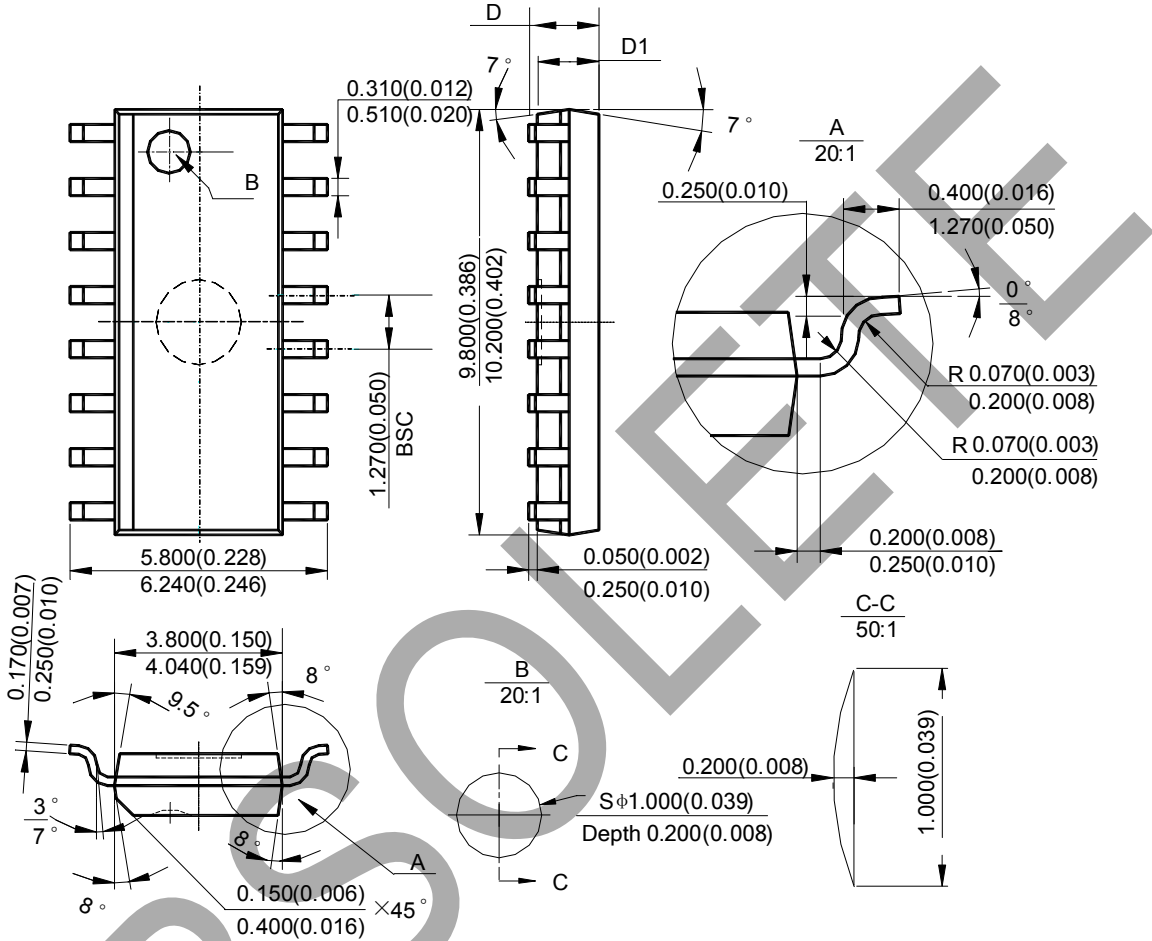


Note: Eject hole, oriented hole and mold mark is optional.

Symbol	D				D1			
	min(mm)	max(mm)	min(inch)	max(inch)	min(mm)	max(mm)	min(inch)	max(inch)
Option1	1.350	1.750	0.053	0.069	1.250	1.650	0.049	0.065
Option2	-	1.260	-	0.050	1.020	-	0.040	-

**Package Outline Dimensions** (continued... All dimensions in mm(inch).)

Please see <http://www.diodes.com/package-outlines.html> for the latest version.

(2) Package Type: DIP-16

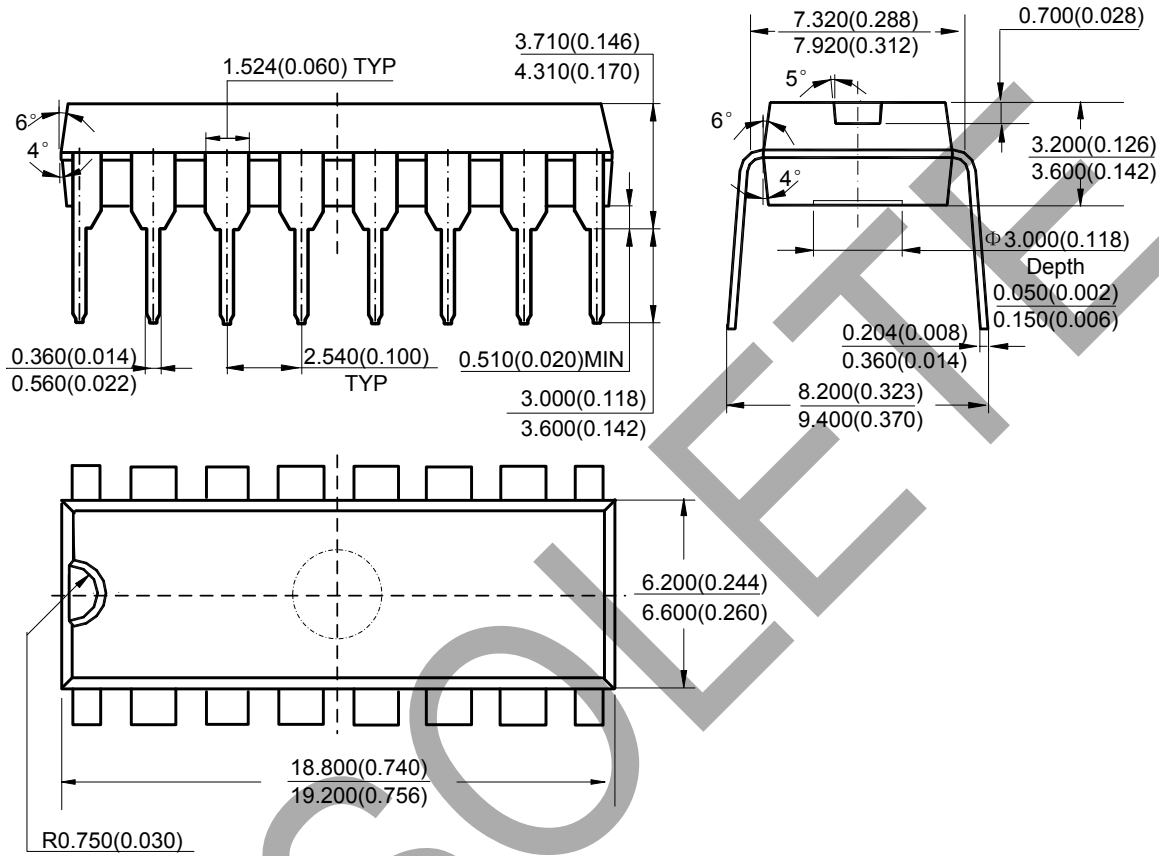

Note: Eject hole, oriented hole and mold mark is optional.


OBSOLETE - PART DISCONTINUED

OBSOLETE

**Suggested Pad Layout**

Please see <http://www.diodes.com/package-outlines.html> for the latest version.

(1) Package Type: SOIC-16

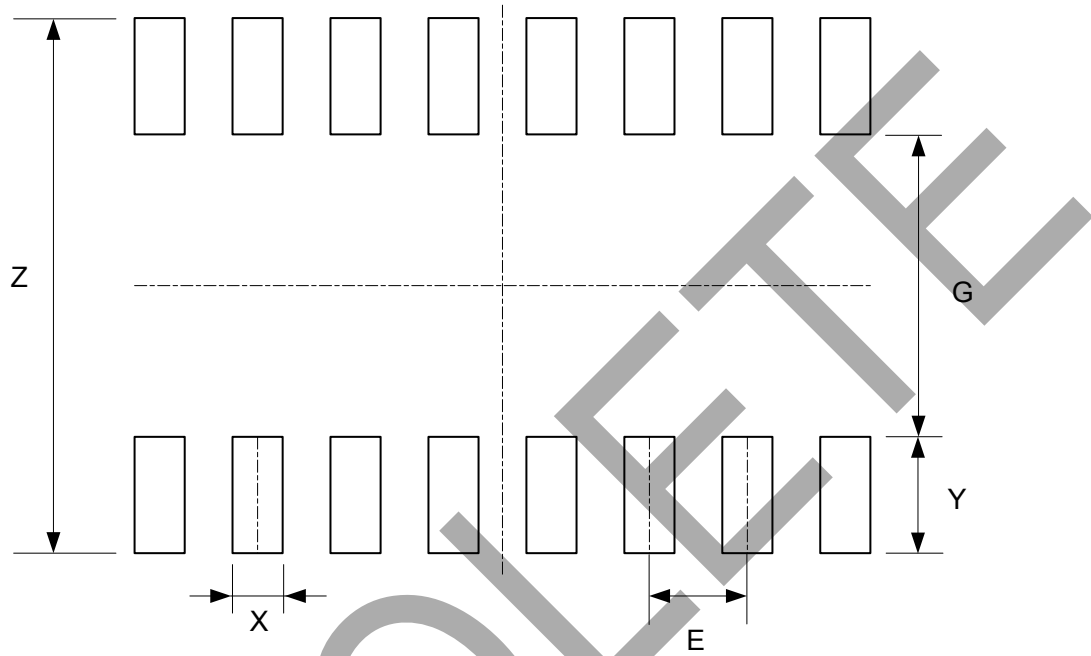

Dimensions	Z (mm)/(inch)	G (mm)/(inch)	X (mm)/(inch)	Y (mm)/(inch)	E (mm)/(inch)
Value	6.900/0.272	3.900/0.154	0.650/0.026	1.500/0.059	1.270/0.050

OBSOLETE - PART DISCONTINUED

OBSOLETE

**IMPORTANT NOTICE**

1. DIODES INCORPORATED AND ITS SUBSIDIARIES (“DIODES”) MAKE NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARDS TO ANY INFORMATION CONTAINED IN THIS DOCUMENT, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION).
2. The Information contained herein is for informational purpose only and is provided only to illustrate the operation of Diodes products described herein and application examples. Diodes does not assume any liability arising out of the application or use of this document or any product described herein. This document is intended for skilled and technically trained engineering customers and users who design with Diodes products. Diodes products may be used to facilitate safety-related applications; however, in all instances customers and users are responsible for (a) selecting the appropriate Diodes products for their applications, (b) evaluating the suitability of the Diodes products for their intended applications, (c) ensuring their applications, which incorporate Diodes products, comply the applicable legal and regulatory requirements as well as safety and functional-safety related standards, and (d) ensuring they design with appropriate safeguards (including testing, validation, quality control techniques, redundancy, malfunction prevention, and appropriate treatment for aging degradation) to minimize the risks associated with their applications.
3. Diodes assumes no liability for any application-related information, support, assistance or feedback that may be provided by Diodes from time to time. Any customer or user of this document or products described herein will assume all risks and liabilities associated with such use, and will hold Diodes and all companies whose products are represented herein or on Diodes’ websites, harmless against all damages and liabilities.
4. Products described herein may be covered by one or more United States, international or foreign patents and pending patent applications. Product names and markings noted herein may also be covered by one or more United States, international or foreign trademarks and trademark applications. Diodes does not convey any license under any of its intellectual property rights or the rights of any third parties (including third parties whose products and services may be described in this document or on Diodes’ website) under this document.
5. Diodes products are provided subject to Diodes’ Standard Terms and Conditions of Sale (<https://www.diodes.com/about/company/terms-and-conditions/terms-and-conditions-of-sales/>) or other applicable terms. This document does not alter or expand the applicable warranties provided by Diodes. Diodes does not warrant or accept any liability whatsoever in respect of any products purchased through unauthorized sales channel.
6. Diodes products and technology may not be used for or incorporated into any products or systems whose manufacture, use or sale is prohibited under any applicable laws and regulations. Should customers or users use Diodes products in contravention of any applicable laws or regulations, or for any unintended or unauthorized application, customers and users will (a) be solely responsible for any damages, losses or penalties arising in connection therewith or as a result thereof, and (b) indemnify and hold Diodes and its representatives and agents harmless against any and all claims, damages, expenses, and attorney fees arising out of, directly or indirectly, any claim relating to any noncompliance with the applicable laws and regulations, as well as any unintended or unauthorized application.
7. While efforts have been made to ensure the information contained in this document is accurate, complete and current, it may contain technical inaccuracies, omissions and typographical errors. Diodes does not warrant that information contained in this document is error-free and Diodes is under no obligation to update or otherwise correct this information. Notwithstanding the foregoing, Diodes reserves the right to make modifications, enhancements, improvements, corrections or other changes without further notice to this document and any product described herein. This document is written in English but may be translated into multiple languages for reference. Only the English version of this document is the final and determinative format released by Diodes.
8. Any unauthorized copying, modification, distribution, transmission, display or other use of this document (or any portion hereof) is prohibited. Diodes assumes no responsibility for any losses incurred by the customers or users or any third parties arising from any such unauthorized use.

Copyright © 2021 Diodes Incorporated

[www.diodes.com](http://www.diodes.com)