

# A5.0SMCJ SERIES

## SURFACE MOUNT UNIDIRECTIONAL AND BIDIRECTIONAL TRANSIENT VOLTAGE SUPPRESSORS

## STAND-OFF VOLTAGE - 10 to 36 Volts POWER DISSIPATION -5000 Watts

### FEATURES


- For surface mounted applications
- Reliable low cost construction utilizing molded plastic technique
- 5000W peak pulse power capability with a 10/1000  $\mu$ s waveform
- Excellent clamping capability
- Low incremental surge resistance
- Fast response time: typically less than 1.0ns for Uni-direction, form 0 Volts to BV min
- AEC-Q101 qualified
- PPAP capable
- Automotive grade
- **Totally Lead-Free & Fully RoHS Compliant (Notes 1 & 2)**
- **Halogen and Antimony Free. "Green" Device (Note 3)**



### MECHANICAL DATA

- Package: Molded plastic
- Package Material: Molding compound, UL Flammability classification 94V-0, (No Br. Sb. Cl.) "Halogen-free"
- Polarity: by cathode band denotes uni-directional device
- Moisture Sensitivity: Max Soldering Temperature +260°C for 30 secs as per JEDEC J-STD-020
- Terminals: Finish- Matte Tin Plated Leads, Solderable per MIL-STD-202, Method 208 ③
- Weight: 0.007 ounces, 0.21 gram (Approximate)

### SMC

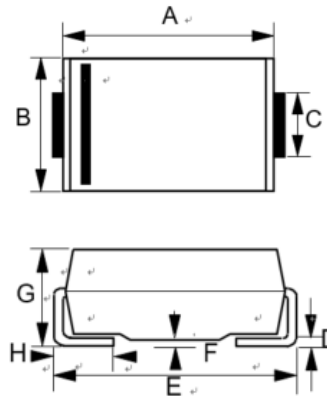

SMC		
DIM.	MIN.	MAX.
A	6.60	7.11
B	5.59	6.22
C	2.92	3.18
D	0.15	0.31
E	7.75	8.13
F	0.05	0.20
G	2.01	2.40
H	0.76	1.52

All Dimensions in millimeter

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

### ABSOLUTE RATINGS

PARAMETER	SYMBOL	VALUE	UNIT
Peak pulse power at $T_J=25^\circ\text{C}$ , $T_p=1\text{ms}$ (Note 4)	$P_{PK}$	5000	W
Peak Forward Surge Current 8.3ms single half sine-wave@ $T_J=25^\circ\text{C}$ (Note 5)	$I_{FSM}$	300	A
Steady State Power Dissipation with PCB, see fig.6	$P_{M(AV)}$	6.5	W
Operating Temperature Range	$T_J$	-55 to +175	°C
Storage Temperature Range	$T_{STG}$	-55 to +175	°C

- Notes:**
1. No purposely added lead. Fully EU Directive 2002/95/EC (RoHS), 2011/65/EU (RoHS 2) & 2015/863/EU (RoHS 3) compliant.
  2. See <https://www.diodes.com/quality/lead-free/> for more information about Diodes Incorporated's definitions of Halogen- and Antimony-free, "Green" and Lead-free.
  3. Halogen- and Antimony-free "Green" products are defined as those which contain <900ppm bromine, <900ppm chlorine (<1500ppm total Br + Cl) and <1000ppm antimony compounds.
  4. Non-repetitive current pulse, per Fig. 3 and derated above  $T_J= 25^\circ\text{C}$  per Fig.1.
  5. Only for unidirectional units.

**ELECTRICAL CHARACTERISTICS**

Type Number	Device Marking code	Reverse Standoff Voltage	Breakdown Voltage VBR Volts			Max. Peak Pulse Current	Max. Clamping Voltage @Ipp	Max. Peak Pulse Current
			Min (V)	Max (V)	It (mA)			
(UNI)	(UNI)	VR (V)	Min (V)	Max (V)	It (mA)	IR (uA)	Vc (V)	Ipp (A)
A5.0SMCJ10A	AHDE	10	11.1	12.3	1	20	17	294.1
A5.0SMCJ12A	AHDF	12	13.3	14.7	1	10	19.9	251.3
A5.0SMCJ13A	AHDG	13	14.4	15.9	1	10.0	21.5	232.6
A5.0SMCJ16A	AHDK	16	17.8	19.7	1	2.0	26.0	192.3
A5.0SMCJ17A	AHDM	17	18.9	20.9	1	2.0	27.6	181.2
A5.0SMCJ18A	AHDP	18	20.0	22.1	1	2.0	29.2	171.2
A5.0SMCJ20A	AHDR	20	22.2	24.5	1	2.0	32.4	154.3
A5.0SMCJ22A	AHDT	22	24.4	26.9	1	2.0	35.5	140.8
A5.0SMCJ24A	AHDV	24	26.7	29.5	1	2.0	38.9	128.5
A5.0SMCJ26A	AHDX	26	28.9	31.9	1	2.0	42.1	118.8
A5.0SMCJ28A	AHDZ	28	32.1	34.4	1	2.0	45.4	110.1
A5.0SMCJ30A	AHEE	30	33.3	36.8	1	2.0	48.4	103.3
A5.0SMCJ33A	AHEG	33	36.7	40.6	1	2.0	53.3	93.8
A5.0SMCJ36A	AHEK	36	40.0	44.2	1	2.0	58.1	86.1

**Notes**

- (1) Pulse test:  $t_p \leq 50$  ms
- (2) Surge current waveform per fig. 3 and derated per fig. 2
- (3) All terms and symbols are consistent with ANSI/IEEE C62.35

THERMAL CHARACTERISTICS (TA = 25 °C unless otherwise noted)			
PARAMETER	SYMBOL	VALUE	UNIT
Typical thermal resistance, junction to ambient	RJA	100	°C/W

**Notes**

- (1) Mounted on minimum recommended pad layout
- (2) Mounted on infinite heat sink

**RATING AND CHARACTERISTIC CURVES  
A5.0SMCJ SERIES**

FIG.1 - PULSE DERATING CURVE

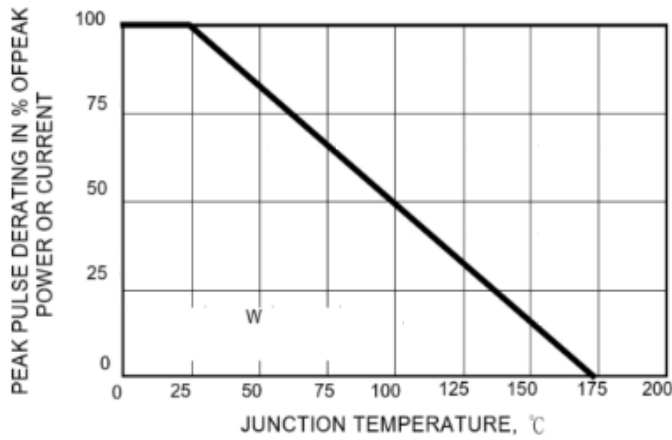


FIG.2 - MAXIMUM NON-REPETITIVE SURGE CURRENT

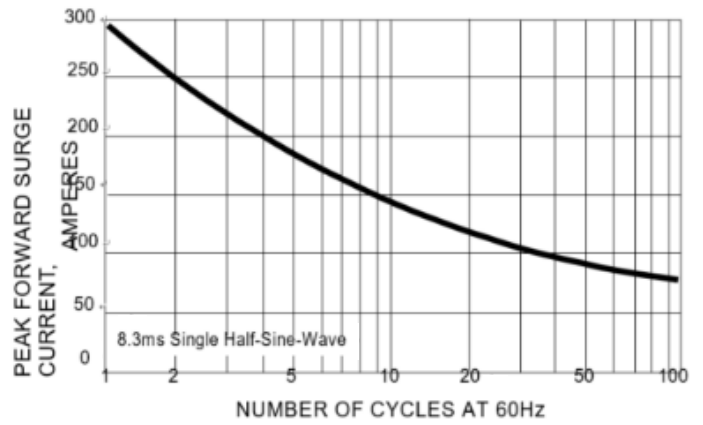


FIG.3 - PULSE WAVEFORM

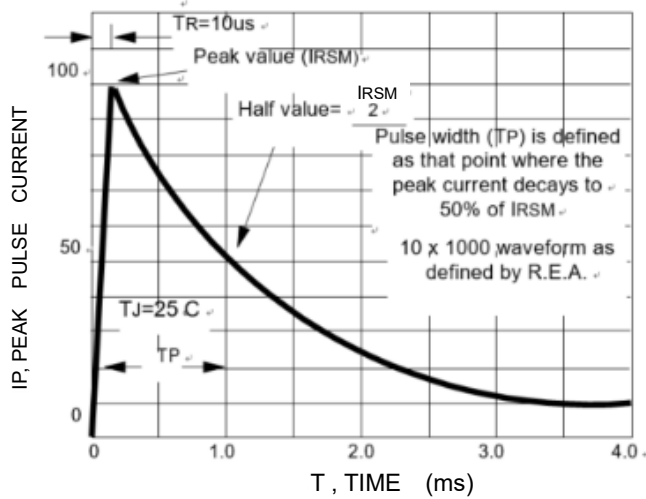


FIG.4 - TYPICAL JUNCTION CAPACITANCE

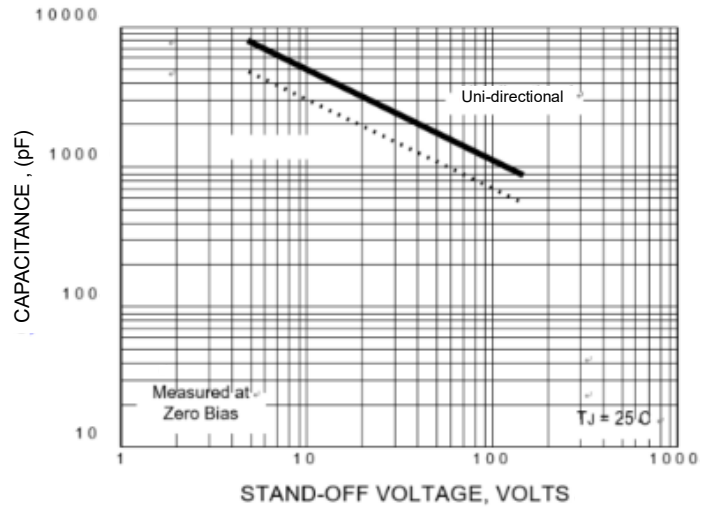


FIG.5 - PULSE RATING CURVE


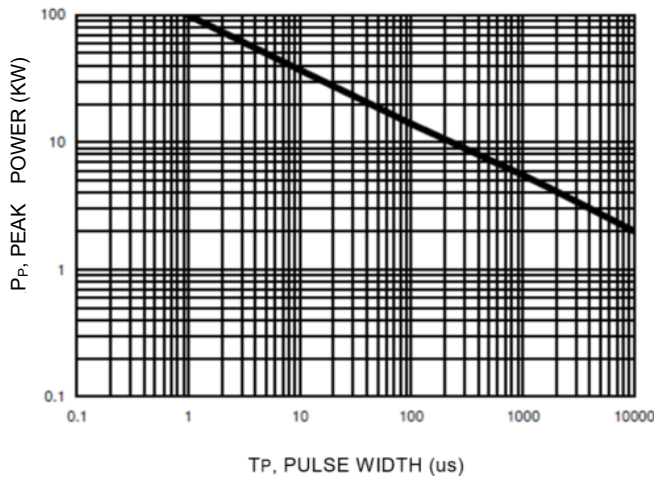


FIG.6 - STEADY STATE POWER DERATING CURVE

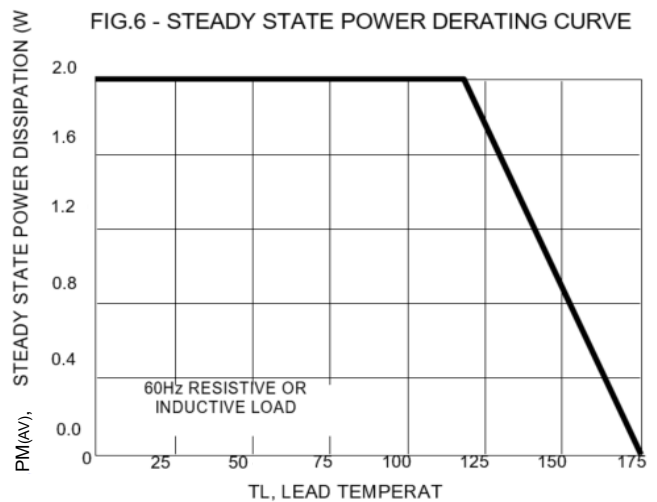

### Ordering Information:

Part Number	Package	Packing	
		Qty.	Carrier
A5.0SMCJ SERIES	SMC	3000pcs	Reel

### Marking Information:




XXXX: Assembly Tracing code  
ZZZ: Product Type Marking code  
Bar Denotes Cathode Side

### Packaging Information:

DEVICE	Q'TY/REEL (PCS)	REEL DIA. (INCH)	Q'TY/BOX (PCS)	Q'TY/CARTON (PCS)
A5.0SMCJXXA	3000	13	6K	36K

### Suggested Pad Layout:

SMC

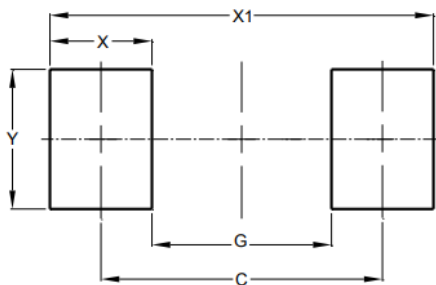

Dimensions	Value (in mm)
C	6.90
G	4.40
X	2.50
X1	9.40
Y	3.30

**Note:** The suggested land pattern dimensions have been provided for reference only, as actual pad layouts may vary depending on application. These dimensions may be modified based on user equipment capability or fabrication criteria. A more robust pattern may be desired for wave soldering and is calculated by adding 0.2 mm to the 'Z' dimension. For further information, please reference document IPC-7351A, Naming Convention for Standard SMT Land Patterns, and for International grid details, please see document IEC, Publication 97.

**Note:** For high voltage applications, the appropriate industry sector guidelines should be considered with regards to creepage and clearance distances between device Terminals and PCB tracking.

**IMPORTANT NOTICE**

1. DIODES INCORPORATED (Diodes) AND ITS SUBSIDIARIES MAKE NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARDS TO ANY INFORMATION CONTAINED IN THIS DOCUMENT, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION).
2. The Information contained herein is for informational purpose only and is provided only to illustrate the operation of Diodes' products described herein and application examples. Diodes does not assume any liability arising out of the application or use of this document or any product described herein. This document is intended for skilled and technically trained engineering customers and users who design with Diodes' products. Diodes' products may be used to facilitate safety-related applications; however, in all instances customers and users are responsible for (a) selecting the appropriate Diodes products for their applications, (b) evaluating the suitability of Diodes' products for their intended applications, (c) ensuring their applications, which incorporate Diodes' products, comply the applicable legal and regulatory requirements as well as safety and functional-safety related standards, and (d) ensuring they design with appropriate safeguards (including testing, validation, quality control techniques, redundancy, malfunction prevention, and appropriate treatment for aging degradation) to minimize the risks associated with their applications.
3. Diodes assumes no liability for any application-related information, support, assistance or feedback that may be provided by Diodes from time to time. Any customer or user of this document or products described herein will assume all risks and liabilities associated with such use, and will hold Diodes and all companies whose products are represented herein or on Diodes' websites, harmless against all damages and liabilities.
4. Products described herein may be covered by one or more United States, international or foreign patents and pending patent applications. Product names and markings noted herein may also be covered by one or more United States, international or foreign trademarks and trademark applications. Diodes does not convey any license under any of its intellectual property rights or the rights of any third parties (including third parties whose products and services may be described in this document or on Diodes' website) under this document.
5. Diodes' products are provided subject to Diodes' Standard Terms and Conditions of Sale (<https://www.diodes.com/about/company/terms-and-conditions/terms-and-conditions-of-sales/>) or other applicable terms. This document does not alter or expand the applicable warranties provided by Diodes. Diodes does not warrant or accept any liability whatsoever in respect of any products purchased through unauthorized sales channel.
6. Diodes' products and technology may not be used for or incorporated into any products or systems whose manufacture, use or sale is prohibited under any applicable laws and regulations. Should customers or users use Diodes' products in contravention of any applicable laws or regulations, or for any unintended or unauthorized application, customers and users will (a) be solely responsible for any damages, losses or penalties arising in connection therewith or as a result thereof, and (b) indemnify and hold Diodes and its representatives and agents harmless against any and all claims, damages, expenses, and attorney fees arising out of, directly or indirectly, any claim relating to any noncompliance with the applicable laws and regulations, as well as any unintended or unauthorized application.
7. While efforts have been made to ensure the information contained in this document is accurate, complete and current, it may contain technical inaccuracies, omissions and typographical errors. Diodes does not warrant that information contained in this document is error-free and Diodes is under no obligation to update or otherwise correct this information. Notwithstanding the foregoing, Diodes reserves the right to make modifications, enhancements, improvements, corrections or other changes without further notice to this document and any product described herein. This document is written in English but may be translated into multiple languages for reference. Only the English version of this document is the final and determinative format released by Diodes.
8. Any unauthorized copying, modification, distribution, transmission, display or other use of this document (or any portion hereof) is prohibited. Diodes assumes no responsibility for any losses incurred by the customers or users or any third parties arising from any such unauthorized use.
9. This Notice may be periodically updated with the most recent version available at <https://www.diodes.com/about/company/terms-and-conditions/important-notice>

The Diodes logo is a registered trademark of Diodes Incorporated in the United States and other countries.  
All other trademarks are the property of their respective owners.  
© 2023 Diodes Incorporated. All Rights Reserved.

[www.diodes.com](http://www.diodes.com)