

ASMCJ SERIES

SURFACE MOUNT UNIDIRECTIONAL AND BIDIRECTIONAL TRANSIENT VOLTAGE SUPPRESSORS

REVERSE VOLTAGE - 5.0 to 75 Volts
POWER DISSIPATION - 1500 Watts

FEATURES

- For surface mounted applications
- Reliable low cost construction utilizing molded plastic technique
- Glass Passivation used, Typical IR less than 1uA above 10V
- Fast response time: typically less than 1.0ns for Uni-direction, less than 5.0ns for Bi-direction, from 0 Volts to BV min
- AEC-Q101 qualified
- PPAP capable
- Automotive grade
- **Lead-Free Finish; RoHS Compliant (Notes 1 & 2)**
- **Halogen and Antimony Free. "Green" Device (Note 3)**
- **For automotive applications requiring specific change control (i.e.: parts qualified to AEC-Q100/101/104/200, PPAP capable, and manufactured in IATF 16949 certified facilities), please refer to the related automotive grade (Q-suffix) part. A listing can be found at <https://www.diodes.com/products/automotive/automotive-products/>.**
- **This part is qualified to JEDEC standards (as references in AEC-Q) for High Reliability. <https://www.diodes.com/quality/product-definitions/>**

MECHANICAL DATA

- Package: Molded plastic
- Package Material: Molding compound, UL Flammability classification 94V-0, (No Br. Sb. Cl.) "Halogen-free".
- Polarity: by cathode band denotes uni-directional device none cathode band denotes bi-directional device
- Moisture Sensitivity: Max Soldering Temperature +260°C for 30 secs as per JEDECJ-STD-020
- Terminals: Finish Matte Tin Plated Leads, Solderable per MIL-STD-202, Method 208 Ⓢ3
- Weight: 0.007 ounces, 0.21 gram (Approximate)

SMC

SMC		
DIM.	MIN.	MAX.
A	6.60	7.11
B	5.59	6.22
C	2.92	3.18
D	0.15	0.31
E	7.75	8.13
F	0.05	0.20
G	2.01	2.40
H	0.76	1.52

All Dimensions in millimeter

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

ABSOLUTE RATINGS

PARAMETER	SYMBOL	VALUE	UNIT
PEAK POWER DISSIPATION AT TA = 25 C, TP = 1ms (Note 4)	P _{PK}	1500	W
Peak Forward Surge Current 8.3ms single half sine-wave @Tj=25°C (Note 5)	I _{FSM}	200	A
Steady State Power Dissipation with PCB	P _{M(AV)}	2.0	W
Maximum Instantaneous forward voltage at 16A (Notes 5, 6)	V _F	2.0	V
Operating Temperature Range	T _J	-55 to +175	°C
Storage Temperature Range	T _{STG}	-55 to +175	°C

Notes:







1. EU Directive 2002/95/EC (RoHS), 2011/65/EU (RoHS 2) & 2015/863/EU (RoHS 3) compliant. All applicable RoHS exemptions applied.
2. See <https://www.diodes.com/quality/lead-free/> for more information about Diodes Incorporated's definitions of Halogen- and Antimony-free, "Green" and Lead-free.
3. Halogen- and Antimony-free "Green" products are defined as those which contain <900ppm bromine, <900ppm chlorine (<1500ppm total Br + Cl) and <1000ppm antimony compounds.
4. Non-repetitive current pulse, per fig. 5 and derated above TA= 25°C per fig.1.
5. Only for uni-directional units.
6. V_F max=2.0V at I_F=16 A 300us square wave pulse.

ELECTRICAL CHARACTERISTICS

Device Uni-Directional	Device Bi-Directional	Device Marking Code		Reverse Standoff Voltage	Breakdown Voltage VBR Volts			Max. Clamping Voltage @Ipp	Max. Peak Pulse Current	Max. Reverse Leakage @ VR
		(UNI)	(BI)		VR (V)	Min.	Max.			
ASMCJ5.0A	ASMCJ5.0CA	AGDE	ABDE	5.0	6.40	7.07	10	9.2	163.0	1000
ASMCJ6.0A	ASMCJ6.0CA	AGDG	ABDG	6.0	6.67	7.37	10	10.3	145.6	1000
ASMCJ6.5A	ASMCJ6.5CA	AGDK	ABDK	6.5	7.22	7.98	10	11.2	133.9	500
ASMCJ7.0A	ASMCJ7.0CA	AGDM	ABDM	7.0	7.78	8.60	10	12.0	125.0	200
ASMCJ7.5A	ASMCJ7.5CA	AGDP	ABDP	7.5	8.33	9.21	1.0	12.9	116.3	100
ASMCJ8.0A	ASMCJ8.0CA	AGDR	ABDR	8.0	8.89	9.83	1.0	13.6	110.3	50.0
ASMCJ8.5A	ASMCJ8.5CA	AGDT	ABDT	8.5	9.44	10.43	1.0	14.4	104.2	20.0
ASMCJ9.0A	ASMCJ9.0CA	AGDV	ABDV	9.0	10.0	11.1	1.0	15.4	97.4	10.0
ASMCJ10A	ASMCJ10CA	AGDX	ABDX	10	11.1	12.3	1.0	17.0	88.2	5.0
ASMCJ11A	ASMCJ11CA	AGDZ	ABDZ	11	12.2	13.5	1.0	18.2	82.4	0.5
ASMCJ12A	ASMCJ12CA	AGEE	ABEE	12	13.3	14.7	1.0	19.9	75.3	0.5
ASMCJ13A	ASMCJ13CA	AGEG	ABEG	13	14.4	15.9	1.0	21.5	69.7	0.5
ASMCJ14A	ASMCJ14CA	AGEK	ABEK	14	15.6	17.2	1.0	23.2	64.7	0.5
ASMCJ15A	ASMCJ15CA	AGEM	ABEM	15	16.7	18.5	1.0	24.4	61.5	0.5
ASMCJ16A	ASMCJ16CA	AGEP	ABEP	16	17.8	19.7	1.0	26.0	57.7	0.5
ASMCJ17A	ASMCJ17CA	AGER	ABER	17	18.9	20.9	1.0	27.6	53.3	0.5
ASMCJ18A	ASMCJ18CA	AGET	ABET	18	20.0	22.1	1.0	29.2	51.4	0.5
ASMCJ20A	ASMCJ20CA	AGEV	ABEV	20	22.2	24.5	1.0	32.4	46.3	0.5
ASMCJ22A	ASMCJ22CA	AGEX	ABEX	22	24.4	27.0	1.0	35.5	42.2	0.5
ASMCJ24A	ASMCJ24CA	AGEZ	ABEZ	24	26.7	29.5	1.0	38.9	38.6	0.5
ASMCJ26A	ASMCJ26CA	AGFE	ABFE	26	28.9	31.9	1.0	42.1	35.6	0.5
ASMCJ28A	ASMCJ28CA	AGFG	ABFG	28	31.1	34.4	1.0	45.4	33.0	0.5
ASMCJ30A	ASMCJ30CA	AGFK	ABFK	30	33.3	36.8	1.0	48.4	31.0	0.5
ASMCJ33A	ASMCJ33CA	AGFM	ABFM	33	36.7	40.6	1.0	53.3	28.1	0.5
ASMCJ33A	ASMCJ33CAC	AGFM	ABFMC	33	36.7	40.6	1.0	53.3	28.1	0.5
ASMCJ36A	ASMCJ36CA	AGFP	ABFP	36	40.0	44.2	1.0	58.1	25.8	0.5
ASMCJ40A	ASMCJ40CA	AGFR	ABFR	40	44.4	49.1	1.0	64.5	23.3	0.5
ASMCJ43A	ASMCJ43CA	AGFT	ABFT	43	47.8	52.8	1.0	69.4	21.6	0.5
ASMCJ45A	ASMCJ45CA	AGFV	ABFV	45	50.0	55.3	1.0	72.7	20.6	0.5
ASMCJ48A	ASMCJ48CA	AGFX	ABFX	48	53.3	58.9	1.0	77.4	19.4	0.5
ASMCJ51A	ASMCJ51CA	AGFZ	ABFZ	51	56.7	62.7	1.0	82.4	18.2	0.5
ASMCJ54A	ASMCJ54CA	AGGE	ABGE	54	60.0	66.3	1.0	87.1	17.2	0.5
ASMCJ58A	ASMCJ58CA	AGGG	ABGG	58	64.4	71.2	1.0	93.6	16.0	0.5
ASMCJ60A	ASMCJ60CA	AGGK	ABGK	60	66.7	73.7	1.0	96.8	15.5	0.5
ASMCJ64A	ASMCJ64CA	AGGM	ABGM	64	71.1	78.6	1.0	103	14.6	0.5
ASMCJ70A	ASMCJ70CA	AGGP	ABGP	70	77.8	86.0	1.0	113	13.3	0.5
ASMCJ75A	ASMCJ75CA	AGGR	ABGR	75	83.3	92.1	1.0	121	12.4	0.5

Notes:
 Suffix 'A' denotes 5% tolerance device.
 1) Add suffix 'C' or 'CA' after part number to specify Bi-directional devices.
 2) The IR limit is double for Bi-Directional devices.
 3) ASMCJ33CA for special customer used.

**RATING AND CHARACTERISTIC CURVES
ASMCJ SERIES**

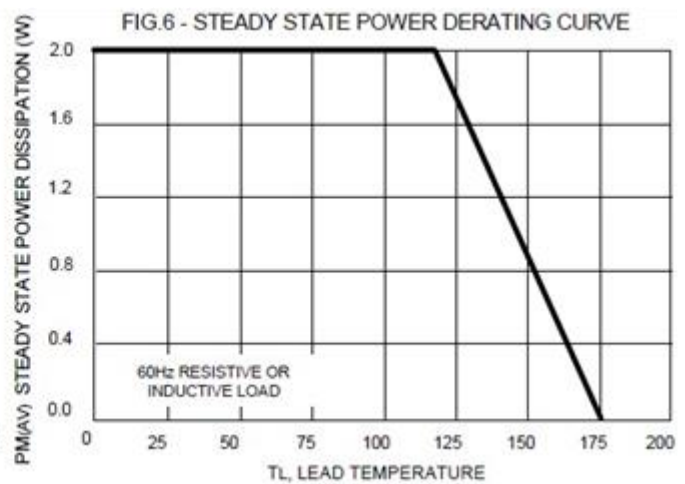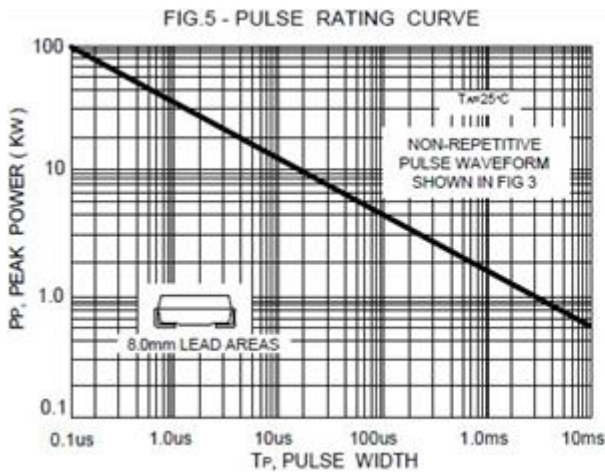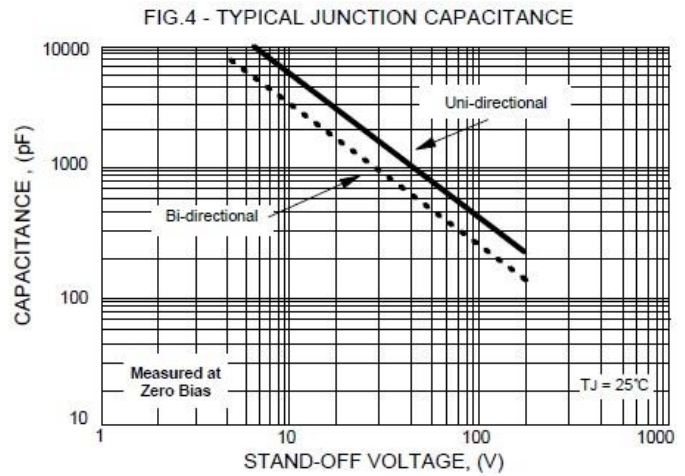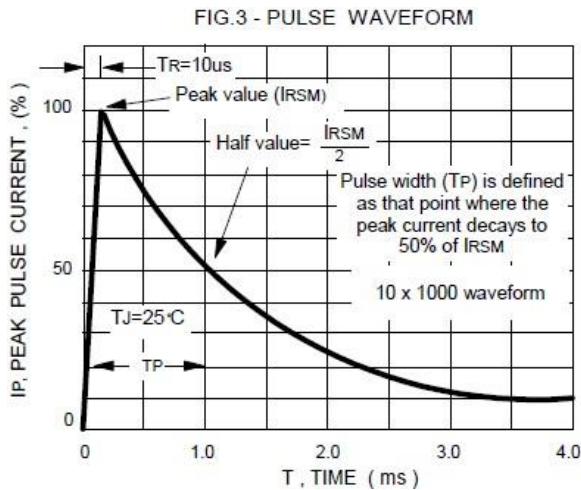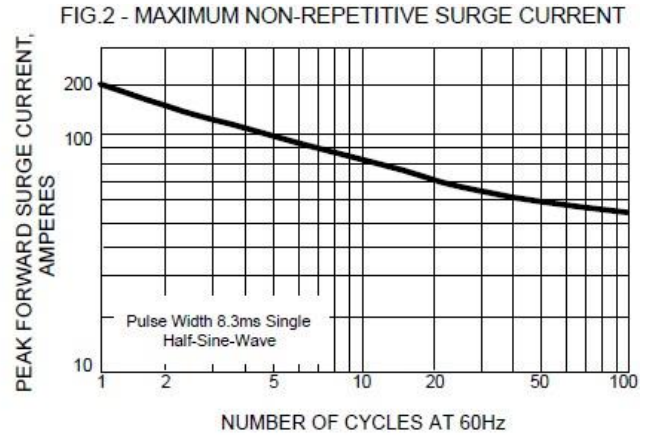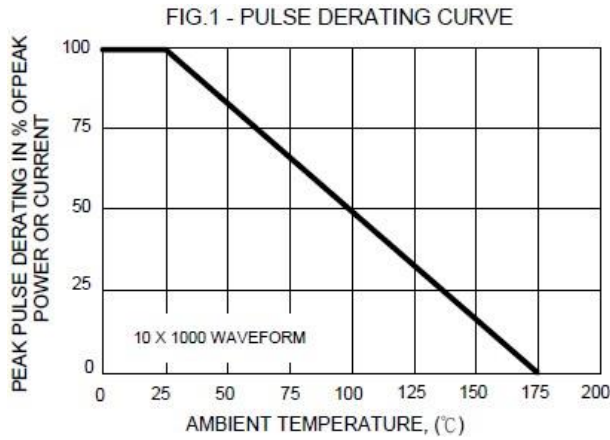

Ordering Information :

Orderable Part Number	Package	Packing	
		Qty.	Carrier
ASMCJ SERIES	SMC	3000pcs	Reel

Marking Information :




XXXX : Assembly Tracing code
ZZZ : Product Type Marking code
Bar Denotes Cathode Side

Packaging Information :

DEVICE	Q'TY/REEL (PCS)	REEL DIA. (INCH)	Q'TY/BOX (PCS)	Q'TY/CARTON (PCS)
ASMCJXXA ASMCJXXCA	3000	13	6K	36K

Suggested Pad Layout :

SMC

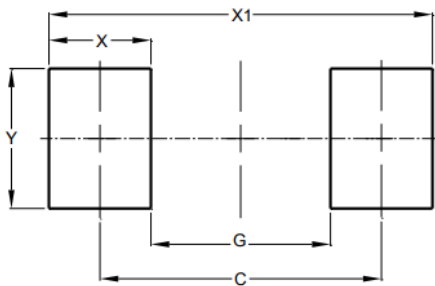

Dimensions	Value (in mm)
C	6.90
G	4.40
X	2.50
X1	9.40
Y	3.30

Note: The suggested land pattern dimensions have been provided for reference only, as actual pad layouts may vary depending on application. These dimensions may be modified based on user equipment capability or fabrication criteria. A more robust pattern may be desired for wave soldering and is calculated by adding 0.2 mm to the 'Z' dimension. For further information, please reference document IPC-7351A, Naming Convention for Standard SMT Land Patterns, and for International grid details, please see document IEC, Publication 97.

Note: For high voltage applications, the appropriate industry sector guidelines should be considered with regards to creepage and clearance distances between device Terminals and PCB tracking.

IMPORTANT NOTICE

1. DIODES INCORPORATED (Diodes) AND ITS SUBSIDIARIES MAKE NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARDS TO ANY INFORMATION CONTAINED IN THIS DOCUMENT, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION).
2. The Information contained herein is for informational purpose only and is provided only to illustrate the operation of Diodes' products described herein and application examples. Diodes does not assume any liability arising out of the application or use of this document or any product described herein. This document is intended for skilled and technically trained engineering customers and users who design with Diodes' products. Diodes' products may be used to facilitate safety-related applications; however, in all instances customers and users are responsible for (a) selecting the appropriate Diodes products for their applications, (b) evaluating the suitability of Diodes' products for their intended applications, (c) ensuring their applications, which incorporate Diodes' products, comply the applicable legal and regulatory requirements as well as safety and functional-safety related standards, and (d) ensuring they design with appropriate safeguards (including testing, validation, quality control techniques, redundancy, malfunction prevention, and appropriate treatment for aging degradation) to minimize the risks associated with their applications.
3. Diodes assumes no liability for any application-related information, support, assistance or feedback that may be provided by Diodes from time to time. Any customer or user of this document or products described herein will assume all risks and liabilities associated with such use, and will hold Diodes and all companies whose products are represented herein or on Diodes' websites, harmless against all damages and liabilities.
4. Products described herein may be covered by one or more United States, international or foreign patents and pending patent applications. Product names and markings noted herein may also be covered by one or more United States, international or foreign trademarks and trademark applications. Diodes does not convey any license under any of its intellectual property rights or the rights of any third parties (including third parties whose products and services may be described in this document or on Diodes' website) under this document.
5. Diodes' products are provided subject to Diodes' Standard Terms and Conditions of Sale (<https://www.diodes.com/about/company/terms-and-conditions/terms-and-conditions-of-sales/>) or other applicable terms. This document does not alter or expand the applicable warranties provided by Diodes. Diodes does not warrant or accept any liability whatsoever in respect of any products purchased through unauthorized sales channel.
6. Diodes' products and technology may not be used for or incorporated into any products or systems whose manufacture, use or sale is prohibited under any applicable laws and regulations. Should customers or users use Diodes' products in contravention of any applicable laws or regulations, or for any unintended or unauthorized application, customers and users will (a) be solely responsible for any damages, losses or penalties arising in connection therewith or as a result thereof, and (b) indemnify and hold Diodes and its representatives and agents harmless against any and all claims, damages, expenses, and attorney fees arising out of, directly or indirectly, any claim relating to any noncompliance with the applicable laws and regulations, as well as any unintended or unauthorized application.
7. While efforts have been made to ensure the information contained in this document is accurate, complete and current, it may contain technical inaccuracies, omissions and typographical errors. Diodes does not warrant that information contained in this document is error-free and Diodes is under no obligation to update or otherwise correct this information. Notwithstanding the foregoing, Diodes reserves the right to make modifications, enhancements, improvements, corrections or other changes without further notice to this document and any product described herein. This document is written in English but may be translated into multiple languages for reference. Only the English version of this document is the final and determinative format released by Diodes.
8. Any unauthorized copying, modification, distribution, transmission, display or other use of this document (or any portion hereof) is prohibited. Diodes assumes no responsibility for any losses incurred by the customers or users or any third parties arising from any such unauthorized use.
9. This Notice may be periodically updated with the most recent version available at <https://www.diodes.com/about/company/terms-and-conditions/important-notice>

The Diodes logo is a registered trademark of Diodes Incorporated in the United States and other countries.
All other trademarks are the property of their respective owners.
© 2024 Diodes Incorporated. All Rights Reserved.

www.diodes.com