



FMMT560Q

500V PNP HIGH VOLTAGE TRANSISTOR IN SOT23

Description

This bipolar junction transistor (BJT) has been designed to meet the stringent requirements of automotive applications.

Features

- BV_{CEO} > -500V
- I_C = -150mA high Continuous Collector Current
- I_{CM} Up to -500mA Peak Pulse Current
- Excellent h_{FE} Characteristics up to I_C = -100mA
- Totally Lead-Free & Fully RoHS compliant (Notes 1 & 2)
- Halogen and Antimony Free. "Green" Device (Note 3)
- The FMMT560Q is suitable for automotive applications requiring specific change control; this part is AEC-Q101 qualified, PPAP capable, and manufactured in IATF16949 certified facilities.

https://www.diodes.com/quality/product-definitions/


Mechanical Data

- Case: SOT23
- Case Material: Molded Plastic, "Green" Molding Compound UL Flammability Classification Rating 94V-0
- Moisture Sensitivity: Level 1 per J-STD-020
- Terminals: Finish Matte Tin Plated Leads, Solderable per MIL-STD-202, Method 208 (3)
- Weight 0.008 grams (Approximate)


SOT23



Top View



Device Symbol



Top View Pin-Out


Ordering Information (Notes 4)

Product	Compliance	Marking	Reel Size (inches)	Tape Width (mm)	Quantity per Reel
FMMT560QTA	Automotive	560	7	8	3000
FMMT560QTC	Automotive	560	13	8	10,000

Notes:

- 1. No purposely added lead. Fully EU Directive 2002/95/EC (RoHS), 2011/65/EU (RoHS 2) & 2015/863/EU (RoHS 3) compliant.
- 2. See https://www.diodes.com/quality/lead-free/ for more information about Diodes Incorporated's definitions of Halogen- and Antimony-free, "Green" and Lead-free.
- 3. Halogen- and Antimony-free "Green" products are defined as those which contain <900ppm bromine, <900ppm chlorine (<1500ppm total Br + Cl) and <1000ppm antimony compounds.
- 4. For packaging details, go to our website at https://www.diodes.com/design/support/packaging/diodes-packaging/.

Marking Information



560 = Product Type Marking Code



Absolute Maximum Ratings (@T_A = +25°C, unless otherwise specified.)

Characteristic	Symbol	Value	Unit
Collector-Base Voltage	V_{CBO}	-500	V
Collector-Emitter Voltage	V_{CEO}	-500	V
Emitter-Base Voltage	V_{EBO}	-7	V
Continuous Collector Current	Ic	-150	mA
Peak Pulse Current	I _{CM}	-500	mA

Thermal Characteristics (@T_A = +25°C, unless otherwise specified.)

Characteristic	Symbol	Value	Unit	
Power Dissipation	(Note 5)	P_{D}	500	mW
Thermal Resistance, Junction to Ambient	(Note 5)	$R_{ heta JA}$	250	°C/W
Thermal Resistance, Junction to Lead	(Note 6)	$R_{ heta JL}$	194	°C/W
Operating and Storage Temperature Range	T _{J,} T _{STG}	-55 to +150	°C	

ESD Ratings (Note 7)

Characteristic	Symbol	Value	Unit	JEDEC Class
Electrostatic Discharge - Human Body Model	ESD HBM	4000	V	3A
Electrostatic Discharge - Machine Model	ESD MM	400	V	С


Notes:

^{5.} For a device mounted with the collector lead on 15mm × 15mm 1oz copper that is on a single-sided FR4 PCB; device is measured under still air conditions whilst operating in a steady-state.

^{6.} Thermal resistance from junction to solder-point (at the end of the collector lead).
7. Refer to JEDEC specification JESD22-A114 and JESD22-A115.



Thermal Characteristics and Derating Information

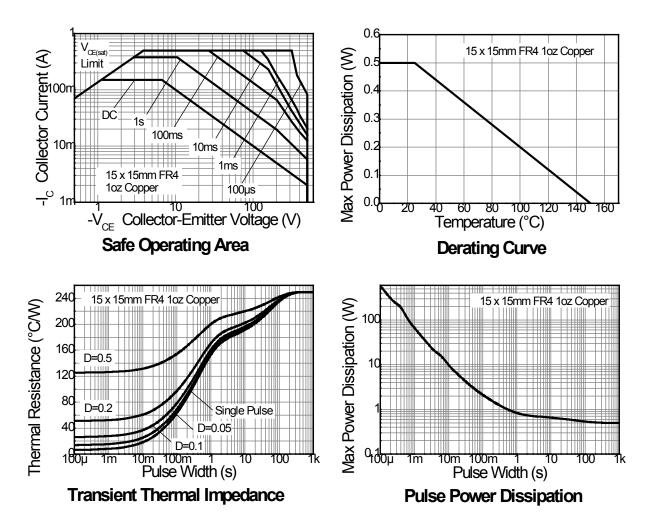




Electrical Characteristics (@T_A = +25°C, unless otherwise specified.)


Characteristic	Symbol	Min	Тур	Max	Unit	Test Condition
Collector-Base Breakdown Voltage	BV_CBO	-500	_	_	٧	$I_{C} = -100 \mu A$
Collector-Emitter Breakdown Voltage (Note 8)	BV _{CEO}	-500	_	_	V	$I_C = -1mA$
Emitter-Base Breakdown Voltage	BV _{EBO}	-7	_	_	V	I _E = -100μA
Collector Cutoff Current	I _{CBO}	_	_	-100	nA	V _{CB} = -500V
Emitter Cutoff Current	I _{EBO}	_	_	-100	nA	V _{EB} = -5V
Static Forward Current Transfer Ratio (Note 8)	h _{FE}	100 80 —	— — 15	300 300 —	_	I_C = -1mA, V_{CE} = -10V I_C = -50mA, V_{CE} = -10V I_C = -100mA, V_{CE} = -10V
Collector-Emitter Saturation Voltage (Note 8)	V _{CE(sat)}	_	_	-200 -500	mV	$I_C = -20$ mA, $I_B = -2$ mA $I_C = -50$ mA, $I_B = -10$ mA
Base-Emitter Saturation Voltage (Note 8)	V _{BE(sat)}	_	_	-0.9	V	$I_C = -50 \text{mA}, I_B = -10 \text{mA}$
Base-Emitter Turn-On Voltage (Note 8)	V _{BE(on)}	_	_	-0.9	V	$I_C = -50 \text{mA}, V_{CE} = -10 \text{V}$
Output Capacitance	C_obo	_	_	8	pF	V _{CB} = -20V, f = 1MHz
Transition Frequency	f _T	60	_	_	MHz	$V_{CE} = -20V, I_{C} = -10mA,$ f = 50MHz
Turn-On Time	t _{on}	_	110	_	ns	$V_{CE} = -100V, I_{C} = -50mA,$
Turn-Off Time	t _{off}	_	1.5	_	μs	$I_{B1} = -5mA$, $I_{B2} = 10mA$


Note: 8. Measured under pulsed conditions. Pulse width \leq 300µs. Duty cycle \leq 2%





Typical Electrical Characteristics (@T_A = +25°C, unless otherwise specified.)


















-I_C Collector Current (A) V_{BE(sat)} v I_C




-I_C Collector Current (A) $V_{BE(on)} v I_{C}$



Package Outline Dimensions

Please see http://www.diodes.com/package-outlines.html for the latest version.

SOT23 Type DN

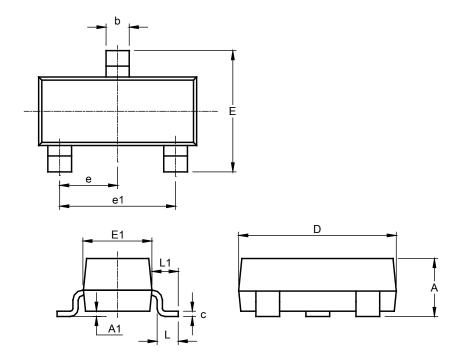


SOT23 Type DN				
Dim	Min	Max	Тур	
Α	0.89	1.12	1.00	
A1	0.01	0.10	0.05	
b	0.30	0.51	0.45	
С	0.08	0.20	0.10	
D	2.80	3.04	3.00	
Е	2.10	2.64	2.42	
E1	1.20	1.40	1.37	
е	0.95 REF			
e1	1.90 REF			
L	0.25	0.60	0.30	
L1	0.45	0.62	0.54	
All Dimensions in mm				

Suggested Pad Layout

 $Please see \ http://www.diodes.com/package-outlines.html \ for \ the \ latest \ version.$

SOT23 Type DN



Dimensions	Value (in mm)
С	2.0
Х	0.8
X1	1.35
Y	0.9
Y1	29

Note: For high voltage applications, the appropriate industry sector guidelines should be considered with regards to creepage and clearance distances between device Terminals and PCB tracking.



IMPORTANT NOTICE

DIODES INCORPORATED MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARDS TO THIS DOCUMENT, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION).

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to this document and any product described herein. Diodes Incorporated does not assume any liability arising out of the application or use of this document or any product described herein; neither does Diodes Incorporated convey any license under its patent or trademark rights, nor the rights of others. Any Customer or user of this document or products described herein in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on Diodes Incorporated website, harmless against all damages.

Diodes Incorporated does not warrant or accept any liability whatsoever in respect of any products purchased through unauthorized sales channel. Should Customers purchase or use Diodes Incorporated products for any unintended or unauthorized application, Customers shall indemnify and hold Diodes Incorporated and its representatives harmless against all claims, damages, expenses, and attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized application.

Products described herein may be covered by one or more United States, international or foreign patents pending. Product names and markings noted herein may also be covered by one or more United States, international or foreign trademarks.

This document is written in English but may be translated into multiple languages for reference. Only the English version of this document is the final and determinative format released by Diodes Incorporated.

LIFE SUPPORT

Diodes Incorporated products are specifically not authorized for use as critical components in life support devices or systems without the express written approval of the Chief Executive Officer of Diodes Incorporated. As used herein:

- A. Life support devices or systems are devices or systems which:
 - 1. are intended to implant into the body, or
 - 2. support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in significant injury to the user.
- B. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or to affect its safety or effectiveness.

Customers represent that they have all necessary expertise in the safety and regulatory ramifications of their life support devices or systems, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of Diodes Incorporated products in such safety-critical, life support devices or systems, notwithstanding any devices- or systems-related information or support that may be provided by Diodes Incorporated. Further, Customers must fully indemnify Diodes Incorporated and its representatives against any damages arising out of the use of Diodes Incorporated products in such safety-critical, life support devices or systems.

Copyright © 2020, Diodes Incorporated

www.diodes.com