



DCP53/-16

#### PNP SURFACE MOUNT TRANSISTOR


## **Features**


- Epitaxial Planar Die Construction
- Complementary NPN Type Available (DCP56)
- Ideally Suited for Automated Assembly Processes
- Ideal for Medium Power Switching or Amplification Applications
- Lead Free By Design/RoHS Compliant (Note 1)
- "Green" Device (Note 2)

#### **Mechanical Data**

- Case: SOT-223
- Case Material: Molded Plastic, "Green" Molding Compound. UL Flammability Classification Rating 94V-0
- Moisture Sensitivity: Level 1 per J-STD-020C
- Terminals: Finish Matte Tin annealed over Copper leadframe (Lead Free Plating). Solderable per MIL-STD-202, Method 208
- Marking & Type Code Information: See Page 3
- Ordering Information: See Page 3
- Weight: 0.115 grams (approximate)







Schematic and Pin Configuration

### Maximum Ratings @TA = 25°C unless otherwise specified

Characteristic	Symbol	Value	Units
Collector-Base Voltage	$V_{CBO}$	-100	V
Collector-Emitter Voltage	V <sub>CEO</sub>	-80	V
Emitter-Base Voltage	$V_{EBO}$	-5	V
Peak Pulse Current	I <sub>CM</sub>	-1.5	A
Continuous Collector Current	I <sub>C</sub>	-1	A

#### **Thermal Characteristics**

Characteristic	Symbol	Value	Unit
Power Dissipation at T <sub>A</sub> = 25°C (Note 3)	Pd	1	W
Operating and Storage Temperature Range	T <sub>j</sub> , T <sub>STG</sub>	-55 to +150	°C
Thermal Resistance, Junction to Ambient Air @ T <sub>A</sub> = 25°C (Note 3)	$R_{\theta JA}$	125	°C/W

## Electrical Characteristics @TA = 25°C unless otherwise specified

Characteristic	Symbol	Min	Тур	Max	Unit	Test Condition
OFF CHARACTERISTICS (Note 4)						
Collector-Base Breakdown Voltage	V <sub>(BR)CBO</sub>	-100	_	_	V	$I_C = -100 \mu A, I_E = 0$
Collector-Emitter Breakdown Voltage	V <sub>(BR)CEO</sub>	-80	_	_	V	$I_C = -10 \text{mA}, I_B = 0$
Emitter-Base Breakdown Voltage	V <sub>(BR)EBO</sub>	-5	_	_	V	$I_E = -10\mu A, I_C = 0$
Collector Cutoff Current	I <sub>CBO</sub>	_	_	-100 -20	nA μA	$V_{CB} = -30V, I_{E} = 0$ $V_{CB} = -30V, I_{E} = 0,$ $T_{A} = 150^{\circ}C$
Emitter Cutoff Current	I <sub>EBO</sub>	_	_	-10	μА	$V_{EB} = -5V, I_{C} = 0$
ON CHARACTERISTICS (Note 4)						
Collector-Emitter Saturation Voltage	V <sub>CE(SAT)</sub>	_	_	-0.5	V	$I_C = -500 \text{mA}, I_B = -50 \text{mA}$
Base-Emitter Turn-On Voltage	V <sub>BE (ON)</sub>	_	_	-1.0	V	$I_C = -500 \text{mA}, V_{CE} = -2 \text{V}$
DC Current Gain	h <sub>FE</sub>	40 25	_	250 —	_	I <sub>C</sub> = -150mA, V <sub>CE</sub> = -2V I <sub>C</sub> = -500mA, V <sub>CE</sub> = -2V
DCP53-10		100	_	250		$I_C = -150 \text{mA}, V_{CE} = -2 \text{V}$
SMALL SIGNAL CHARACTERISTICS						
Current Gain-Bandwidth Product	f⊤	_	200	_	MHz	$I_C = -50$ mA, $V_{CE} = -5$ V, $f = 100$ MHz

Notes:

- 1. No purposefully added lead.
- Diodes Inc.'s "Green" Policy can be found on our website at http://www.diodes.com/products/lead\_free/index.php.
- 3. Device mounted on FR-4 PCB; pad layout as shown on page 4 or in Diodes Inc. suggested pad layout document AP02001, which can be found on our website at http://www.diodes.com/datasheets/ap02001.pdf.
- 4. Measured under pulsed conditions. Pulse width =  $300\mu s$ . Duty cycle  $\leq 2\%$ .

DCP53/-16 Document number: DS30794 Rev. 6 - 4

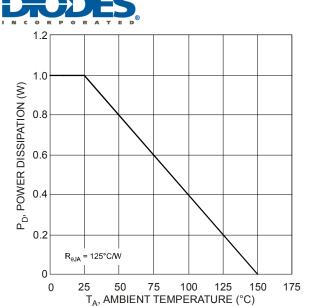


Fig. 1 Power Dissipation vs. Ambient Temperature (Note 3)


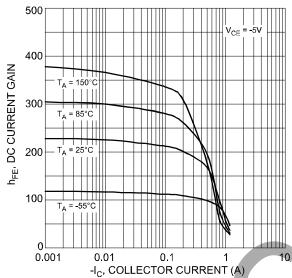


Fig. 3 Typical DC Current Gain vs. Collector Current

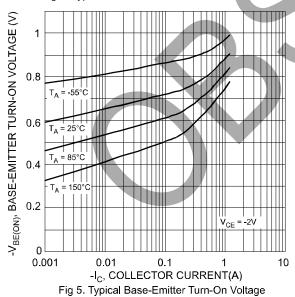

vs. Collector Current

1.0

0.8

0.8

I<sub>B</sub> = 8mA

I<sub>B</sub> = 6mA

I<sub>B</sub> = 4mA

I<sub>B</sub> = 2mA

I<sub>B</sub> = 2mA

V<sub>CE</sub>, COLLECTOR-EMITTER VOLTAGE (V)

Fig. 2 Typical Collector Current vs. Collector-Emitter Voltage

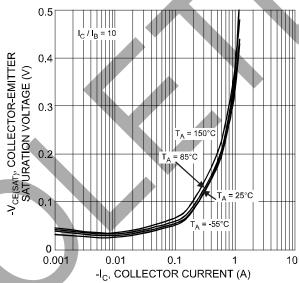


Fig. 4 Typical Collector-Emitter Saturation Voltage vs. Collector Current


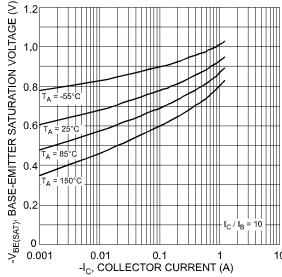


Fig. 6 Typical Base-Emitter Saturation Voltage vs. Collector Current

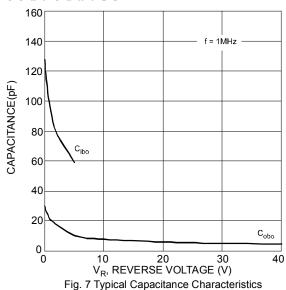

## DCP53/-16



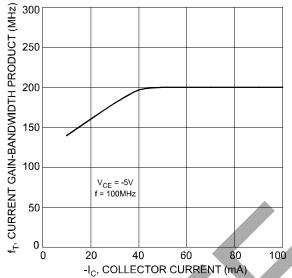



Fig. 8 Typical Gain-Bandwidth Product vs. Collector Current

#### **Ordering Information** (Note 5)

Device	Packaging	Shipping
DCP53-13	SOT-223	2500/Tape & Reel
DCP53-16-13	SOT-223	2500/Tape & Reel

5. For packaging details, go to our website at http://www.diodes.com/datasheets/ap02007.pdf.

## **Marking Information**




Oll = Manufacturer's code marking XXX = Product type marking code Ex:

P18 = DCP53 P18-16 = DCP53-16

YWW = Date code marking Y = Last digit of year ex: 7 = 2007 WW = Week code 01 - 52


# **Package Outline Dimensions**

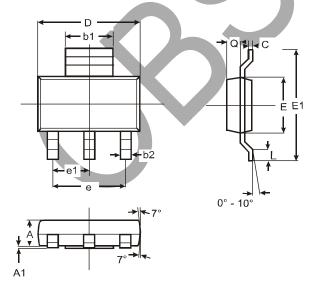

SOT-223					
Dim	Min	Max	Тур		
Α	1.55	1.65	1.60		
<b>A1</b>	0.010	0.15	0.05		
b1	2.90	3.10	3.00		
b2	0.60	0.80	0.70		
С	0.20	0.30	0.25		
D	6.45	6.55	6.50		
Е	3.45	3.55	3.50		
E1	6.90	7.10	7.00		
е			4.60		
e1			2.30		
L	0.85	1.05	0.95		
Q	0.84	0.94	0.89		
All Dimensions in mm					



# Suggested Pad Layout: (Based on IPC-SM-782)

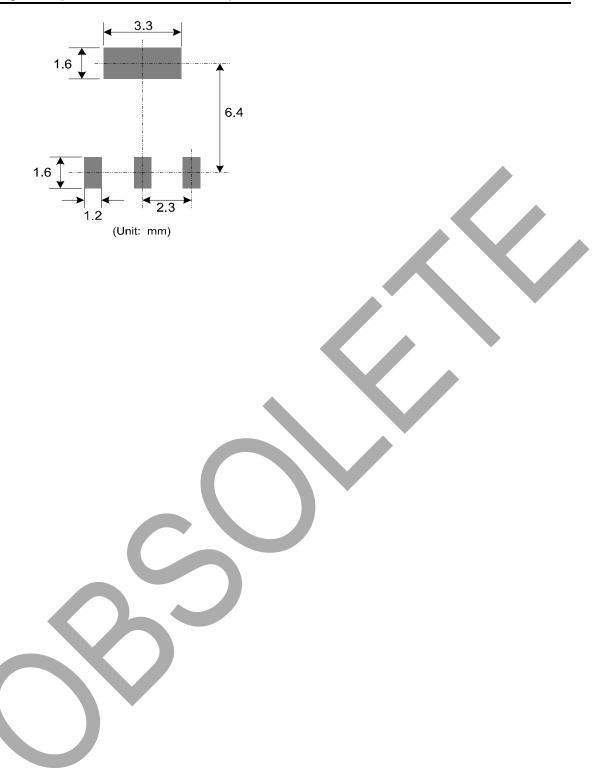



#### **IMPORTANT NOTICE**

- 1. DIODES INCORPORATED AND ITS SUBSIDIARIES ("DIODES") MAKE NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARDS TO ANY INFORMATION CONTAINED IN THIS DOCUMENT, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY. FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION).
- The Information contained herein is for informational purpose only and is provided only to illustrate the operation of Diodes products described herein and application examples. Diodes does not assume any liability arising out of the application or use of this document or any product described herein. This document is intended for skilled and technically trained engineering customers and users who design with Diodes products. Diodes products may be used to facilitate safety-related applications; however, in all instances customers and users are responsible for (a) selecting the appropriate Diodes products for their applications, (b) evaluating the suitability of the Diodes products for their intended applications, (c) ensuring their applications, which incorporate Diodes products, comply the applicable legal and regulatory requirements as well as safety and functional-safety related standards, and (d) ensuring they design with appropriate safeguards (including testing, validation, quality control techniques, redundancy, malfunction prevention, and appropriate treatment for aging degradation) to minimize the risks associated with their applications.
- Diodes assumes no liability for any application-related information, support, assistance or feedback that may be provided by Diodes from time to time. Any customer or user of this document or products described herein will assume all risks and liabilities associated with such use, and will hold Diodes and all companies whose products are represented herein or on Diodes' websites, harmless against all damages and
- Products described herein may be covered by one or more United States, international or foreign patents and pending patent applications. Product names and markings noted herein may also be covered by one or more United States, international or foreign trademarks and trademark applications. Diodes does not convey any license under any of its intellectual property rights or the rights of any third parties (including third parties whose products and services may be described in this document or on Diodes' website) under this document.
- provided to Diodes' Standard Terms and Conditions Sale Diodes subject (https://www.diodes.com/about/company/terms-and-conditions/terms-and-conditions-of-sales/) or other applicable terms. This document does not alter or expand the applicable warranties provided by Diodes. Diodes does not warrant or accept any liability whatsoever in respect of any products purchased through unauthorized sales channel.
- Diodes products and technology may not be used for or incorporated into any products or systems whose manufacture, use or sale is prohibited under any applicable laws and regulations. Should customers or users use Diodes products in contravention of any applicable laws or regulations, or for any unintended or unauthorized application, customers and users will (a) be solely responsible for any damages, losses or penalties arising in connection therewith or as a result thereof, and (b) indemnify and hold Diodes and its representatives and agents harmless against any and all claims, damages, expenses, and attorney fees arising out of, directly or indirectly, any claim relating to any noncompliance with the applicable laws and regulations, as well as any unintended or unauthorized application.
- While efforts have been made to ensure the information contained in this document is accurate, complete and current, it may contain technical inaccuracies, omissions and typographical errors. Diodes does not warrant that information contained in this document is error-free and Diodes is under no obligation to update or otherwise correct this information. Notwithstanding the foregoing. Diodes reserves the right to make modifications, enhancements, improvements, corrections or other changes without further notice to this document and any product described herein. This document is written in English but may be translated into multiple languages for reference. Only the English version of this document is the final and determinative format released by Diodes.
- Any unauthorized copying, modification, distribution, transmission, display or other use of this document (or any portion hereof) is prohibited. Diodes assumes no responsibility for any losses incurred by the customers or users or any third parties arising from any such unauthorized use.

5 of 5

Copyright © 2021 Diodes Incorporated

www.diodes.com