



# DDTA (R1≠R2 SERIES) KA

PNP PRE-BIASED SMALL SIGNAL SURFACE MOUNT TRANSISTOR

Obsolete Part Number	Alternative Part Number
DDTA113ZKA	DDTA113ZCA
DDTA114WKA	DDTA114WCA
DDTA114YKA	DDTA114YCA
DDTA123JKA	DDTA123JCA
DDTA123YKA	DDTA123YCA
DDTA124XKA	DDTA124XCA
DDTA143FKA	DDTA143FCA
DDTA143ZKA	DDTA143ZCA
DDTA144VKA	DDTA144VCA
DDTA144WKA	DDTA144WCA


#### Features


- Epitaxial Planar Die Construction
- Complementary NPN Types Available (DDTC)
- Built-In Biasing Resistors, R1≠R2
- Lead Free/RoHS Compliant (Note 1)
- "Green" Device, Note 2 and 3


#### Mechanical Data

- Case: SC-59
- Case material: Molded Plastic, "Green" Molding Compound, Note 3. UL Flammability Classification Rating 94V-0
- Moisture Sensitivity: Level 1 per J-STD-020C
- Terminals: Solderable per MIL-STD-202, Method 208
- Lead Free Plating (Matte Tin Finish annealed over
- Copper leadframe).
- Terminal Connections: See Diagram
- Marking Information: See Table Below & Page 4
- Ordering Information: See Page 4
- Weight: 0.008 grams (approximate)

P/N	R1 (NOM)	R2 (NOM)	Type Code		
DDTA1137KA	1KQ	10KΩ	P02		
DDTA123YKA	2.2KΩ	10KΩ	P05		
DDTA123JKA	2.2KΩ	47KΩ	P06		
DDTA143XKA	4.7KΩ	10KΩ	P09		
DDTA143FKA	4.7KΩ	22KΩ	P10		
DDTA143ZKA	4.7KΩ	47KΩ	P11		
DDTA114YKA	10KΩ	47KΩ	P14		
DDTA114WKA	10KΩ	4.7KΩ	P15		
DDTA124XKA	<b>22K</b> Ω	47KΩ	P18		
DDTA144VKA	47ΚΩ	10KΩ	P21		
DDTA144WKA	47KΩ	<b>22K</b> Ω	P22		

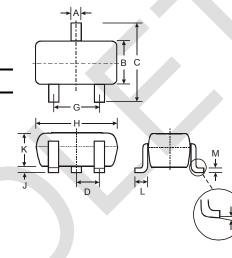





SC-59

Min

0.35

1.50

2.70

2.90

0.013

1.00

0.35

0.95

1.90

Max

0.50

1.70

3.00

3.10

0.10

1.30

0.55

Dim

Α

В

С

D

G

н

J

κ

L

Schematic and Pin Configuration



GND (+)



### Maximum Ratings @T<sub>A</sub> = 25°C unless otherwise specified

Characteristic		Symbol	Value	Unit
Supply Voltage, (3) to (2)		V <sub>CC</sub>	-50	V
Input Voltage, (1) to (2)	DDTA113ZKA DDTA123YKA DDTA123JKA DDTA143XKA DDTA143FKA DDTA143ZKA DDTA143ZKA DDTA114WKA DDTA114WKA DDTA124XKA DDTA144WKA	V <sub>IN</sub>	+5 to -10 +5 to -12 +5 to -12 +7 to -20 +6 to -30 +5 to -30 +6 to -40 +10 to -30 +10 to -40 +15 to -40 +10 to -40	V
Output Current	DDTA113ZKA DDTA113ZKA DDTA123JKA DDTA143XKA DDTA143FKA DDTA143FKA DDTA143ZKA DDTA114YKA DDTA114WKA DDTA114WKA DDTA124XKA DDTA144WKA	lo	-100 -100 -100 -100 -100 -100 -70 -70 -100 -50 -30 -30	mA
Power Dissipation		Pd	200	mW
Output Current	All	I <sub>C</sub> (Max)	-100	mA
Thermal Resistance, Junction to Ambient Air (Note	e 4)	$R_{ ext{ heta}JA}$	625	°C/W
Operating and Storage Temperature Range		Tj, T <sub>STG</sub>	-55 to +150	°C

Notes:

No purposefully added lead.
Diodes Inc.'s "Green" policy can be found on our website at http://www.diodes.com/products/lead\_free/index.php.
Product manufactured with Date Code 0627 (week 27, 2006) and newer are built with Green Molding Compound. Product manufactured prior to Date Code 0627 are built with Non-Green Molding Compound and may contain Halogens or Sb2O3 Fire Retardants.
Mounted on FR4 PC Board with recommended pad layout at http://www.diodes.com/datasheets/ap02001.pdf.




### Electrical Characteristics @T<sub>A</sub> = 25°C unless otherwise specified

Cha	acteristic	Symbol	Min	Тур	Max	Unit	Test Condition			
Cilai	DDTA113ZKA	Symbol	-0.3	אני	Ινίαλ	Unit				
	DDTA1132IXA DDTA123JKA DDTA143JKA DDTA143JKA DDTA143FKA DDTA143ZKA DDTA114YKA DDTA114YKA DDTA114WKA DDTA124XKA DDTA144WKA	V <sub>l(off)</sub>	-0.3 -0.5 -0.3 -0.3 -0.5 -0.3 -0.5 -0.3 -0.8 -0.4 -1.0 -0.8		_		V <sub>CC</sub> = 5V, I <sub>O</sub> = 100μA			
Input Voltage	DDTA113ZKA DDTA123YKA DDTA123JKA DDTA143XKA DDTA143FKA DDTA143FKA DDTA143ZKA DDTA114YKA DDTA114WKA DDTA124XKA DDTA144VKA DDTA144WKA	VI(on)			-3.0 -3.0 -1.1 -2.5 -1.3 -1.3 -1.4 -3.0 -2.5 -5.0 -4.0	V	$\begin{array}{l} V_{O}=-0.3V, \ I_{O}=-20mA \\ V_{O}=-0.3V, \ I_{O}=-20mA \\ V_{O}=-0.3V, \ I_{O}=-5mA \\ V_{O}=-0.3V, \ I_{O}=-20mA \\ V_{O}=-0.3V, \ I_{O}=-3mA \\ V_{O}=-0.3V, \ I_{O}=-5mA \\ V_{O}=-0.3V, \ I_{O}=-1mA \\ V_{O}=-0.3V, \ I_{O}=-2mA \end{array}$			
Output Voltage		V <sub>O(on)</sub>		-0.1	-0.3	V	$\begin{split} & _{O}/I_{I} = -5mA/-0.25mA \text{ DDTA123JKA} \\ & _{O}/I_{I} = -5mA/-0.25mA \text{ DDTA143ZKA} \\ & _{O}/I_{I} = -5mA/-0.25mA \text{ DDTA114YKA} \\ & _{O}/I_{I} = -10mA/-0.5mA \text{ All Others} \end{split}$			
Input Current	DDTA113ZKA DDTA123YKA DDTA123JKA DDTA143XKA DDTA143FKA DDTA143ZKA DDTA114YKA DDTA114YKA DDTA114WKA DDTA124XKA DDTA124XKA DDTA144WKA	I <sub>I</sub>			-7.2 -3.8 -1.8 -1.8 -1.8 -0.88 -0.88 -0.36 -0.16 -0.16	mA	V <sub>1</sub> = -5V			
Output Current	·	I <sub>O(off)</sub>			-0.5	μA	$V_{CC} = -50V, V_{I} = 0V$			
DC Current Gain	DDTA113ZKA DDTA123YKA DDTA123JKA DDTA143XKA DDTA143FKA DDTA143ZKA DDTA114YKA DDTA114WKA DDTA124XKA DDTA124XKA DDTA144VKA DDTA144WKA	Gı	-33 -33 -80 -30 -68 -80 -68 -24 -68 -33 -56				V <sub>O</sub> = -5V, I <sub>O</sub> = -10mA			
Input Resistor Tolerance		$\Delta R_1$	-30		+30	%				
Resistance Ratio Tolerance		$\Delta R_2/R_1$	-20		+20	%				
Gain-Bandwidth Product*		f <sub>T</sub>		250	_	MHz				

\* Transistor - For Reference Only



### **Typical Curves – DDTA123JKA**

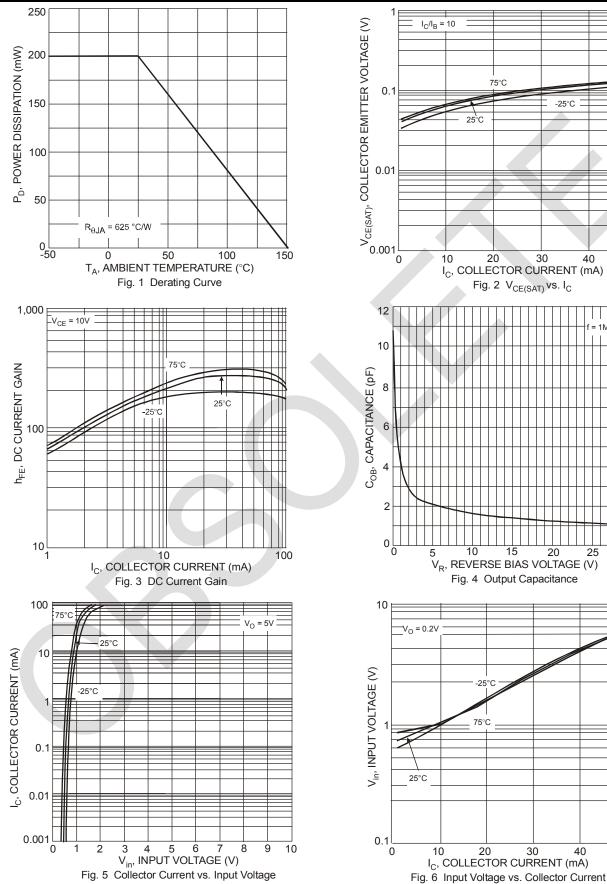

50

50

30

1MHz




#### Ordering Information (Note 3 & 5)

Device	Packaging	Shipping		
DDTA113ZKA-7-F	SC-59	3000/Tape & Reel		
DDTA123YKA-7-F	SC-59	3000/Tape & Reel		
DDTA123JKA-7-F	SC-59	3000/Tape & Reel		
DDTA143XKA-7-F	SC-59	3000/Tape & Reel		
DDTA143FKA-7-F	SC-59	3000/Tape & Reel		
DDTA143ZKA-7-F	SC-59	3000/Tape & Reel		
DDTA114YKA-7-F	SC-59	3000/Tape & Reel		
DDTA114WKA-7-F	SC-59	3000/Tape & Reel		
DDTA124XKA-7-F	SC-59	3000/Tape & Reel		
DDTA144VKA-7-F	SC-59	3000/Tape & Reel		
DDTA144WKA-7-F	SC-59	3000/Tape & Reel		

Notes: 5. For packaging details, go to our website at http://www.diodes.com/datasheets/ap02007.pdf.

#### **Marking Information**



PXX = Product Type Marking Code, See Table on Page 1 YM = Date Code Marking Y = Year ex: T = 2006 M = Month ex: 9 = September

Date Code Key

Year	2002	2003	2004	2005	200	06 2	2007	20	800	2009	2010	2011	2012
Code	Ν	Р	R	S	Т		U		V	W	Х	Y	Z
Month	Jan	Feb	Mar	Apr	Мау	Jun	J	ul	Aug	Sep	Oct	Nov	Dec
Code	1	2	3	4	5	6	7	7	8	9	0	Ν	D



#### IMPORTANT NOTICE

DIODES INCORPORATED MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARDS TO THIS DOCUMENT, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION).

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to this document and any product described herein. Diodes Incorporated does not assume any liability arising out of the application or use of this document or any product described herein; neither does Diodes Incorporated convey any license under its patent or trademark rights, nor the rights of others. Any Customer or user of this document or products described herein in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on Diodes Incorporated website, harmless against all damages.

Diodes Incorporated does not warrant or accept any liability whatsoever in respect of any products purchased through unauthorized sales channel. Should Customers purchase or use Diodes Incorporated products for any unintended or unauthorized application, Customers shall indemnify and hold Diodes Incorporated and its representatives harmless against all claims, damages, expenses, and attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized application.

Products described herein may be covered by one or more United States, international or foreign patents pending. Product names and markings noted herein may also be covered by one or more United States, international or foreign trademarks.

This document is written in English but may be translated into multiple languages for reference. Only the English version of this document is the final and determinative format released by Diodes Incorporated.

#### LIFE SUPPORT

Diodes Incorporated products are specifically not authorized for use as critical components in life support devices or systems without the express written approval of the Chief Executive Officer of Diodes Incorporated. As used herein:

A. Life support devices or systems are devices or systems which:

1. are intended to implant into the body, or

- 2. support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in significant injury to the user.
- B. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or to affect its safety or effectiveness.

Customers represent that they have all necessary expertise in the safety and regulatory ramifications of their life support devices or systems, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of Diodes Incorporated products in such safety-critical, life support devices or systems, notwithstanding any devices- or systems-related information or support that may be provided by Diodes Incorporated. Further, Customers must fully indemnify Diodes Incorporated and its representatives against any damages arising out of the use of Diodes Incorporated products in such safety-critical, life support devices or systems.

Copyright © 2013, Diodes Incorporated

www.diodes.com