

**4-CHANNEL SINGLE-WIRE DIMMING LED DRIVE
with ULTRA LOW DROPOUT CURRENT SINK**

OBSOLETE - PART DISCONTINUED

Description

The PAM2811 provides 4 regulated current sinks, capable of sinking up to 20mA current to accommodate 4 white LEDs. It requires no charge pump, has no noise and EMI, and significantly improves the efficiency in Li battery range.

LED brightness can be controlled by single-wire dimming techniques. The constant current sink is set by 16-step.

The PAM2811 is available in QFN3x3-16L, MSOP-8L, SOT23-8L and DFN2x2-8L packages.



Features

- Support up to 4 LEDs
- LED Sink Current 20mA
- Low Dropout Voltage
- Low Quiescent Supply Current: 270µA (typ)
- No Noise and EMI
- Shutdown Current Less than 1µA
- Over Temperature Protection
- 16-Step Brightness Control
- Small Package: QFN3x3-16L, MSOP-8L, SOT23-8L, DFN2X2-8L
- Pb-free Package


Applications

- Mobile Phone
- Digital Camera
- PDA MP3


Pin Assignments

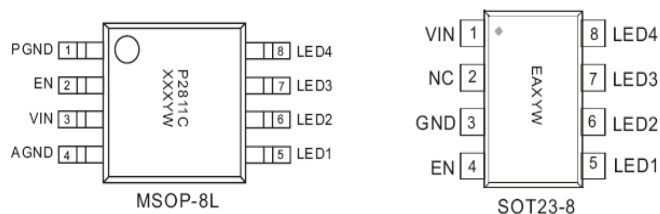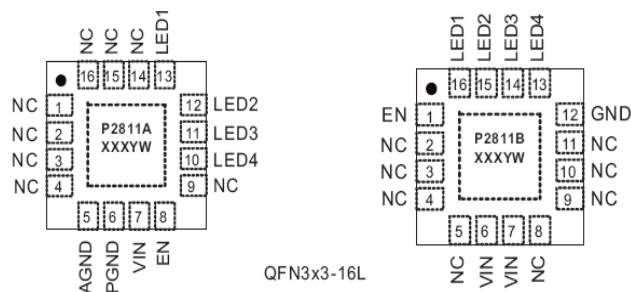

DFN 2X2-8



Typical Applications Circuit

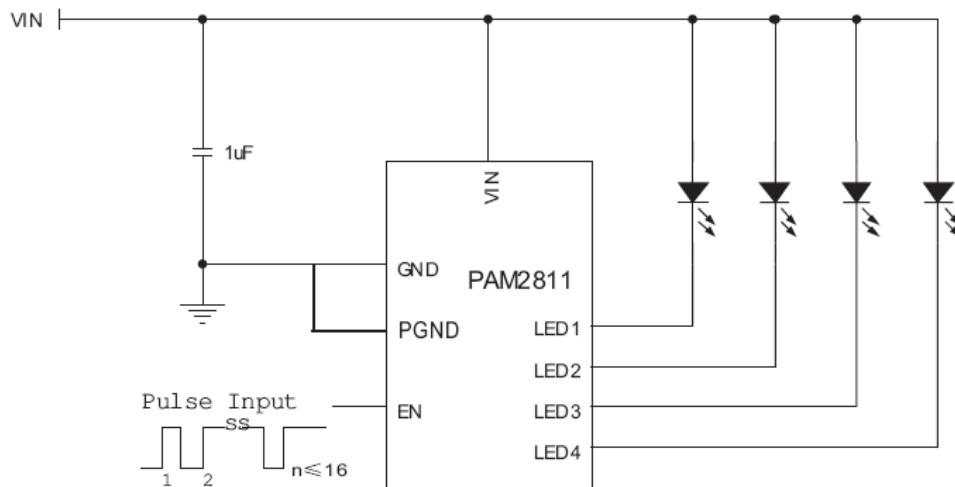



Pin Descriptions

Pin Name	Pin Number					Function
	QFN3x3-16L P2811A	QFN3x3-16L P2811B	MSOP-8L P2811C	SOT23-8 P2811D	DFN2x2-8L P2811E	
NC	1	2	—	—	—	Not Connected
NC	2	3	—	2	—	Not Connected
NC	3	4	—	—	—	Not Connected
NC	4	5	—	—	—	Not Connected
AGND	5	—	4	3	4	Analog Ground
PGND	6	12	1	—	1	Power Ground
VIN	7	6	3	1	3	Supply Input
VIN		7		—		Supply Input
EN	8	1	2	4	2	Enable Pin. Active high, with an internal 150kΩ pull-down resistor.
NC	9	8	—	—	—	Not Connected
LED4	10	13	8	8	5	LED4 Pin. Connect to the LED cathode, leave it to connect GND or open if unused.
LED3	11	14	7	7	6	LED3 Pin. Connect to the LED cathode, leave it to connect GND or open if unused.
LED2	12	15	6	6	7	LED2 Pin. Connect to the LED cathode, leave it to connect GND or open if unused.
LED1	13	16	5	5	8	LED1 Pin. Connect to the LED cathode, leave it to connect GND or open if unused.
NC	14	9	—	—	—	Not Connected
NC	15	10	—	—	—	Not Connected
NC	15	11	—	—	—	Not Connected

OBSOLETE

OBSOLETE - PART DISCONTINUED

Functional Block Diagram

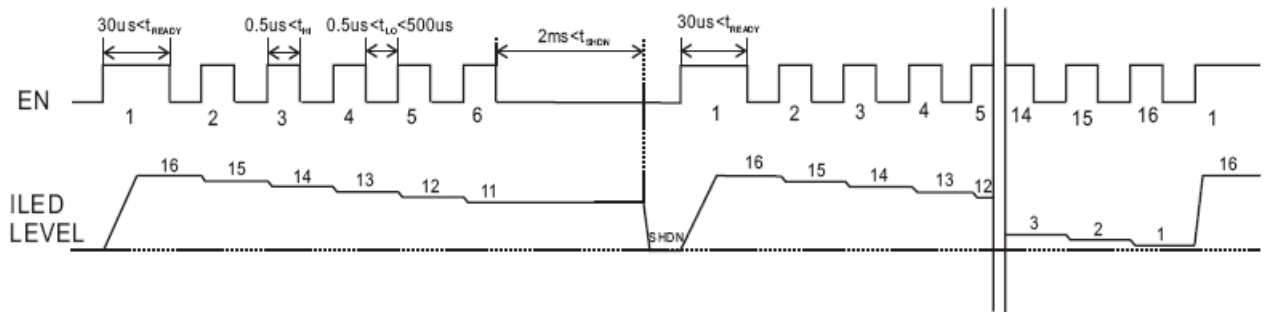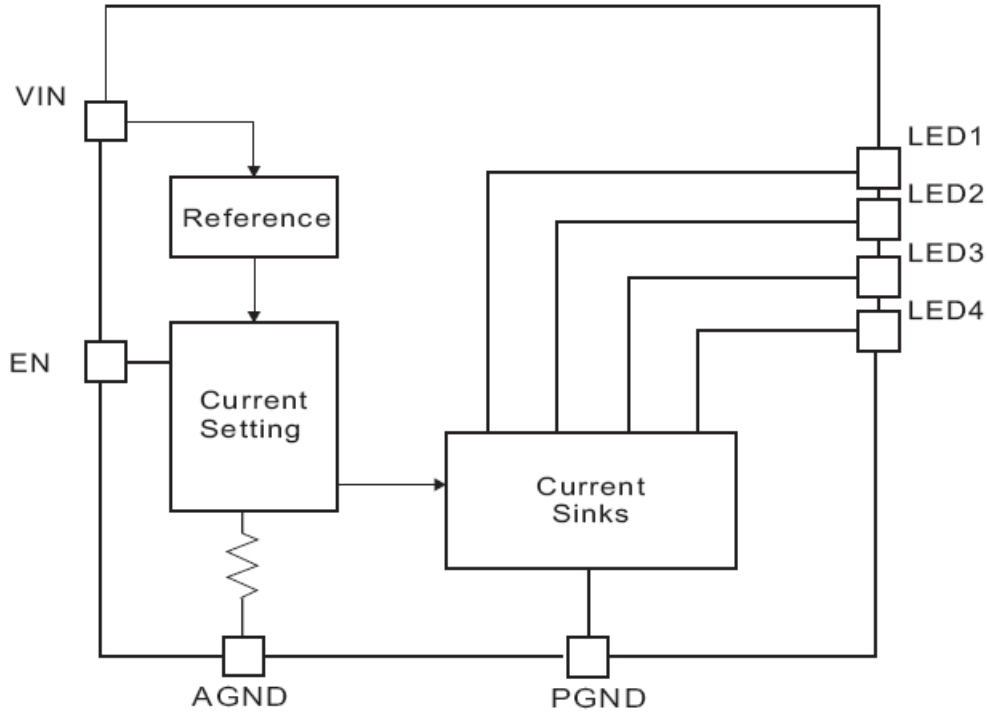

Absolute Maximum Ratings (@T_A = +25°C, unless otherwise specified.)

These are stress ratings only and functional operation is not implied. Exposure to absolute maximum ratings for prolonged time periods may affect device reliability. All voltages are with respect to ground.

Parameter	Rating	Unit
Input Voltage Range	-0.3 to +6.0	V
PWM Pin Voltage	-0.3 to (V _{IN} + 0.3)/+6	
Maximum Junction Temperature	150	°C
Storage Temperature	-65 to +150	
Soldering Temperature	300, 5sec	

Recommended Operating Conditions (@T_A = +25°C, unless otherwise specified.)

Parameter	Rating	Unit
Input Voltage	2.7 to 5.5	V
Junction Temperature Range	-40 to +125	°C
Ambient Temperature Range	-40 to +85	

Thermal Information

Parameter	Package	Symbol	Max	Unit
Thermal Resistance (Junction to Ambient)	QFN3x3-16L	θ _{JA}	35	°C/W
	MSOP-8L		180	
	SOT23-8		250	
	DFN2x2-8L		80	
Thermal Resistance (Junction to Case)	QFN3x3-16L	θ _{JC}	14	
	MSOP-8L		75	
	SOT23-8		130	
	DFN2x2-8L		20	


Electrical Characteristics (@T_A = +25°C, V_{IN} = 3.6V, unless otherwise specified.)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Units
Input Voltage	V _{IN}		2.7		5.5	V
Output Current	I _{LED}	All LEDs 100% setting	18	20	22	mA
Current Matching		All LEDs 100% setting	-3		+3	%
LED Dropout Voltage	V _{DO}	I _{LED} = 20mA		60		mV
Quiscent Current	I _Q	I _{LED} = 0		270		µA
Shutdown Current	I _{SD}	V _{EN} = 0V, V _{IN} = 5.5V		0.1	1.0	µA
Startup Time	T _{ON}			30		µs
EN Input Logic High	V _{HI}		1.5			V
EN Input Logic Low	V _{LO}				0.4	V
EN Low Time for Dimming	T _{LO}		0.5		500	µs
EN High Time for Dimming	T _{HI}		0.5			µs
Shutdown Delay Time	T _{OFF}	V _{EN} = 0V		1000	2000	µs
Thermal Shutdown Temperature	T _P			150		°C
Hysteresis Temperature				30		°C


OBSOLETE - PART DISCONTINUED

Typical Performance Characteristics (@ $T_A = +25^\circ\text{C}$, $V_{IN} = 5.0\text{V}$, unless otherwise specified.)


LED Current VS LED Pin Voltage

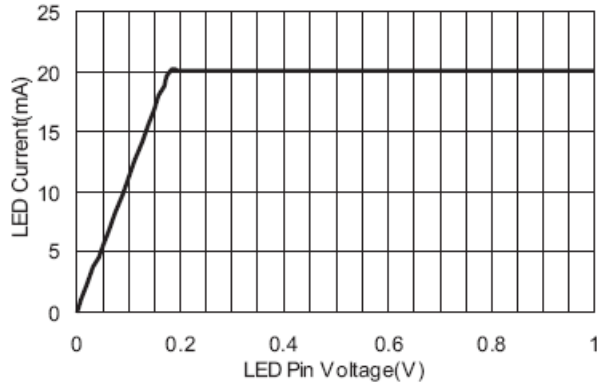


LED Current VS Input Voltage

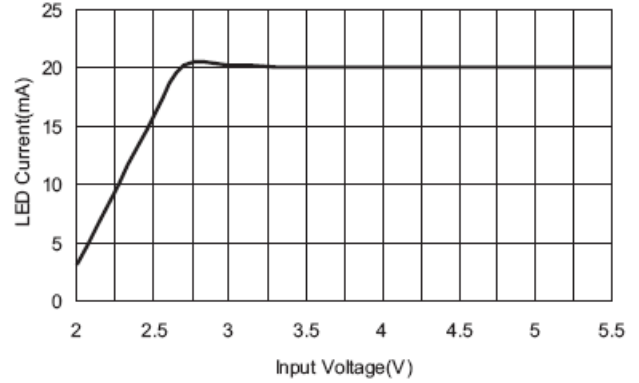

Efficiency VS Input Voltage

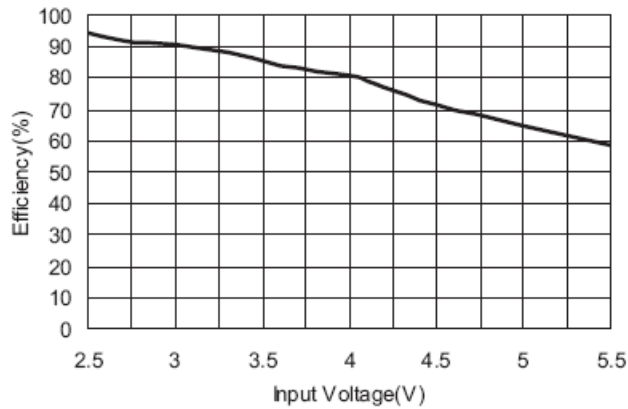

LED Current VS EN Steps

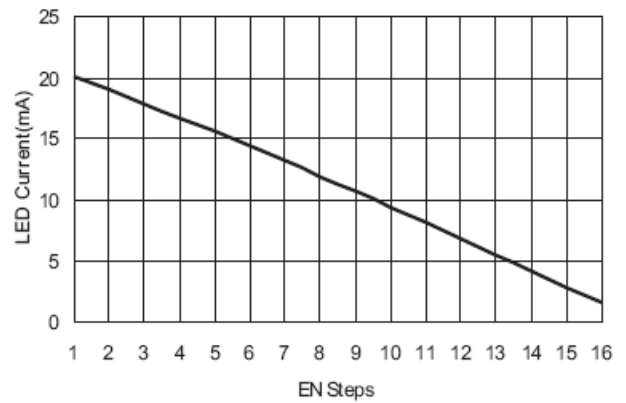

OBS

OBSOLETE - PART DISCONTINUED

Application Information

The PAM2811 is a 4-channel programmable white-LED driver. It is capable of supplying 20mA per channel with a total of 80mA output current available. LED brightness control of PAM2811 can be achieved with a Pulses signal.

Enable Input

The EN input is used to enable or disable the PAM2811. Pulling the EN pin higher than 1.5V will enable the device. For producing constant, nonpulsating output current compare to conventional pulse width modulation (PWM) dimming scheme. The PAM2811 incorporates a 4-bit DAC for brightness control to program the output current at 16 continuous steps: 20 to 1.25mA. Table1 shows details for current setting.

Table 1 Current Setting

Data	Current (mA)	Data	Current (mA)
16	20.00	8	10.00
15	18.75	7	8.75
14	17.50	6	7.50
13	16.25	5	6.25
12	15.00	4	5.00
11	13.75	3	3.75
10	12.50	2	2.50
9	11.25	1	1.25


Page 2 shows the detail operation of 16-steps brightness control. When single-wire pulse counting dimming is used, the ready time is recommended to be greater than 30µs for enabling the device, the pulse high time TH_I recommended to be greater than 0.5µs, and the pulse low time T_{LO} is recommended to be greater than 0.5µs and less than 500µs. A constant current is sourced as long as the EN signal remains high. The shutdown feature reduces quiescent current to less than 0.1µA.

LED Connection


The PAM2811 supports up to 4 white LEDs. The four LEDs are connected from VIN to LED_x respectively. If the LED is not used, it should be connected to GND or open.

Over Temperature Protection

The PAM2811 equips over temperature protection. When the junction temperature (T_J) exceeds +150°C, the current source turns off automatically. The device will turn on again after the IC's T_J cools down under +120°C. Operating at absolute maximum temperature is not recommended.

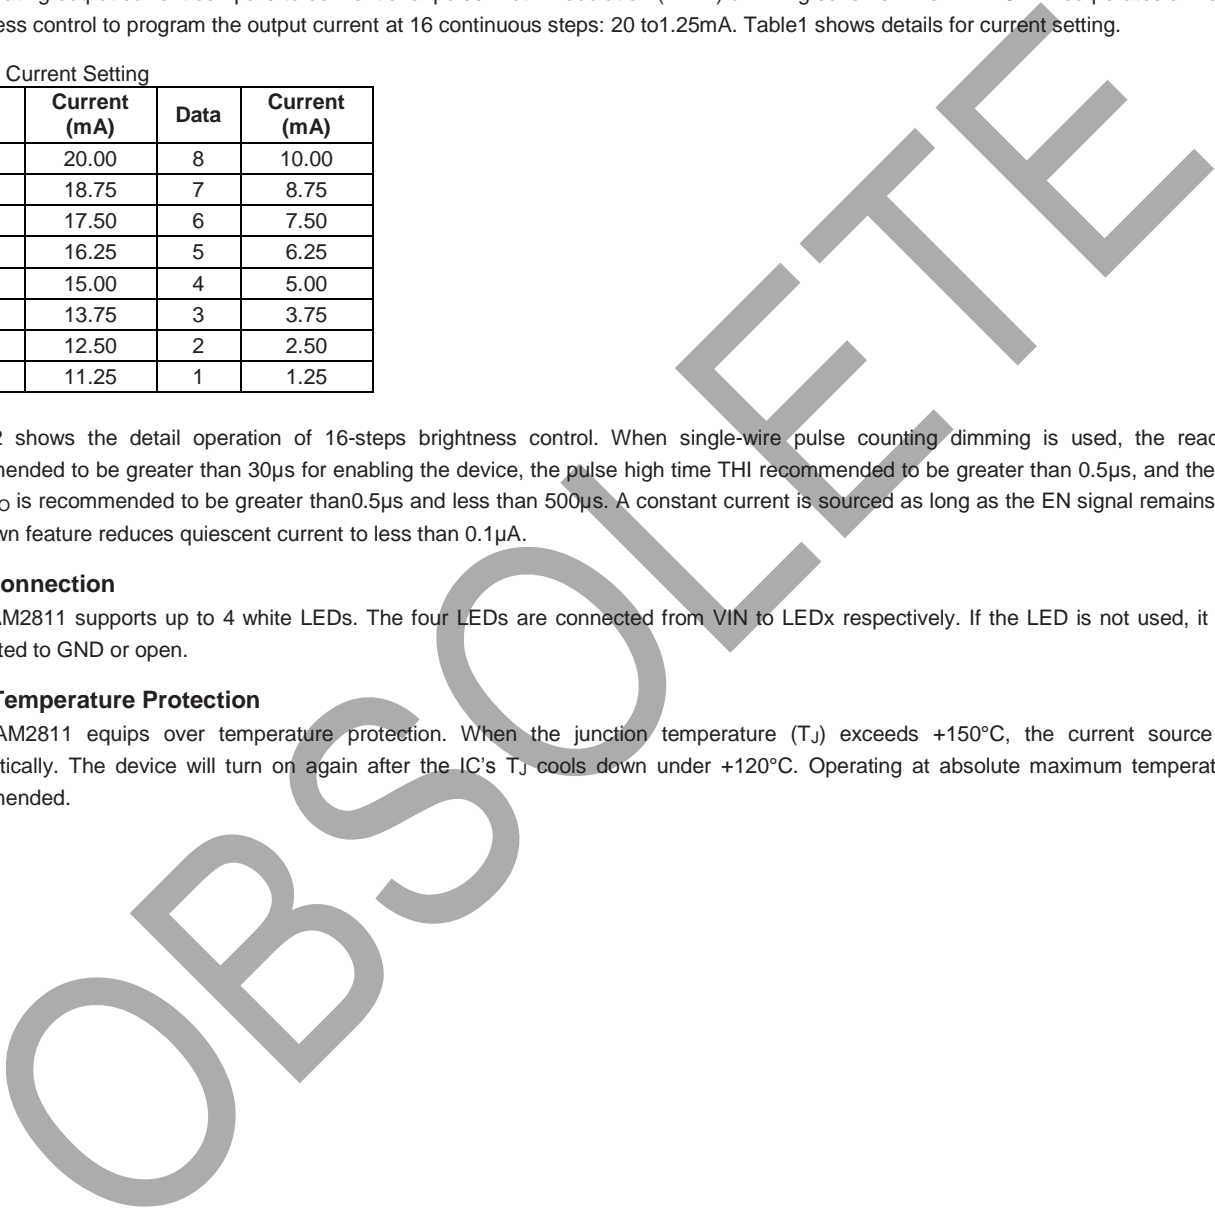

Ordering Information

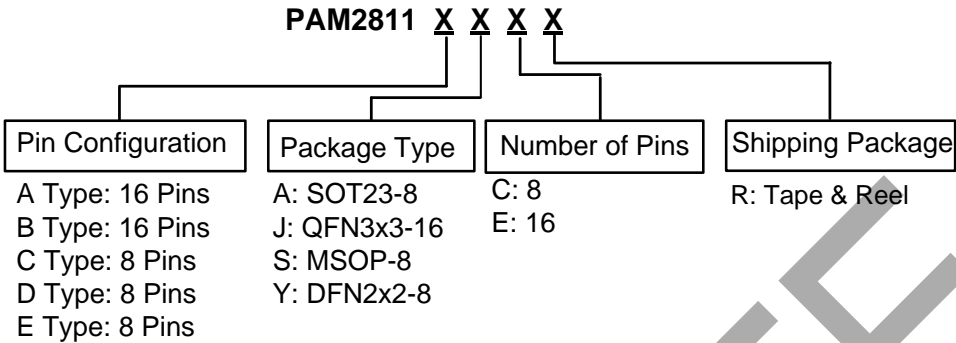


Part Number	Part Marking	Package Type	Standard Package
PAM2811AJER	P2811A XXXYW	QFN3x3-16L	3000 Units/Tape & Reel
PAM2811BJER	P2811B XXXYW	QFN3x3-16L	3000 Units/Tape & Reel
PAM2811CSCR	P2811C XXXYW	MSOP-8L	2500 Units/Tape & Reel
PAM2811DACR	EAXYW	SOT23-8	3000 Units/Tape & Reel
PAM2811EYCR	P2811E XXXYW	DFN3x3-8L	3000 Units/Tape & Reel

OBSOLETE



OBSOLETE - PART DISCONTINUED

OBSOLETE - PART DISCONTINUED


Marking Information

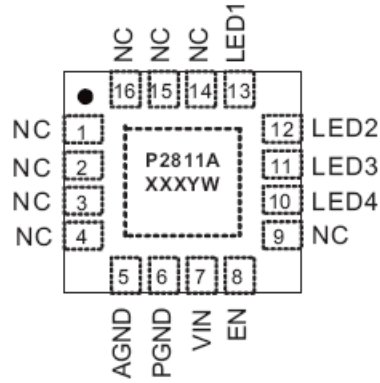


QFN3x3-16L

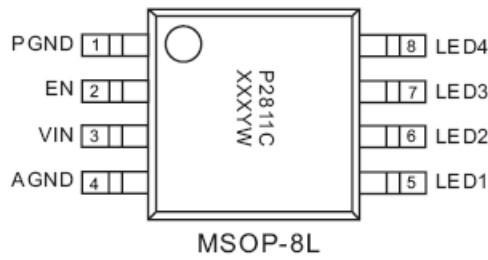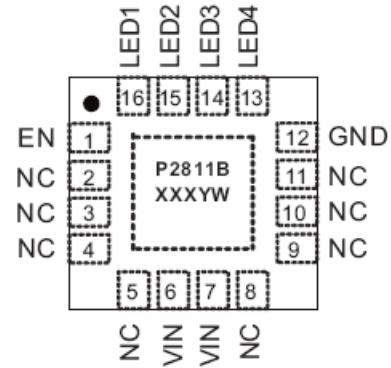

MSOP-8L

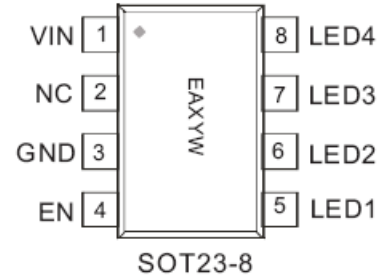

SOT23-8



DFN 2X2-8


Y: Year
W: Week
X: Internal Code



OBSOLETE - PART DISCONTINUED

Package Outline Dimensions (All dimensions in mm.)

QFN3x3-16

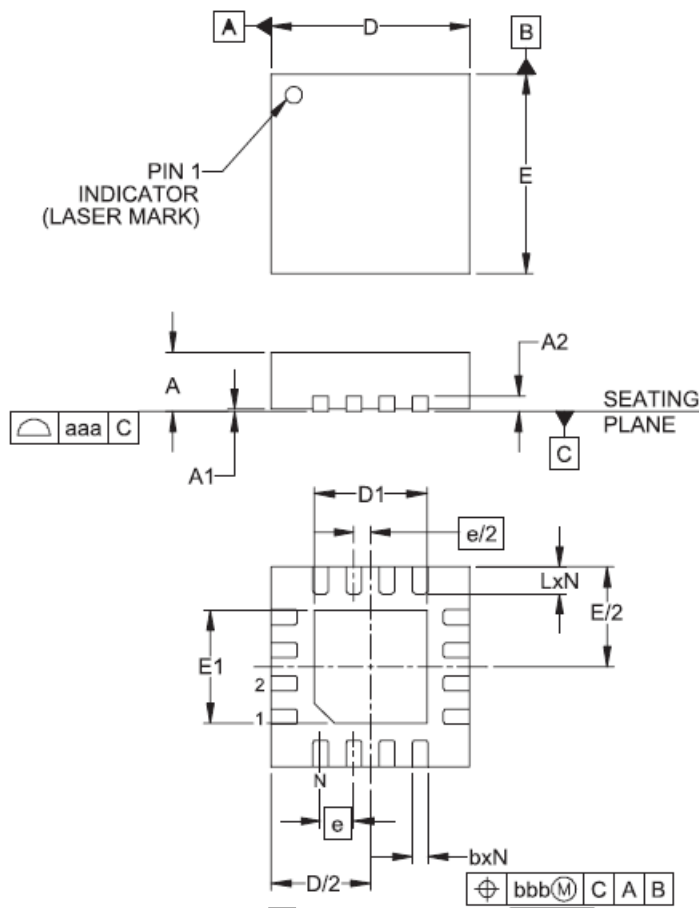

DIMENSIONS (Millimeters)			
	MIN	TYP	MAX
A	0.70	0.75	0.80
A1	0.00	0.02	0.05
A2	0.20		
b	0.18	0.25	0.30
D	2.90	3.00	3.10
D1	1.55	1.70	1.80
E	2.90	3.00	3.10
E1	1.55	1.70	1.80
e	0.50BSC		
L	0.30	0.40	0.50
N	16		
aaa	0.08		
bbb	0.10		


- Notes:
1. Controlling dimensions are in millimeters (angles in degrees)
 2. Coplanarity applies to the exposed pad as well as the terminals.
 3. DAP is 1.90 x 1.90mm.

OBSOLETE

OBSOLETE - PART DISCONTINUED

Package Outline Dimensions (cont.) (All dimensions in mm.)

MSOP-8

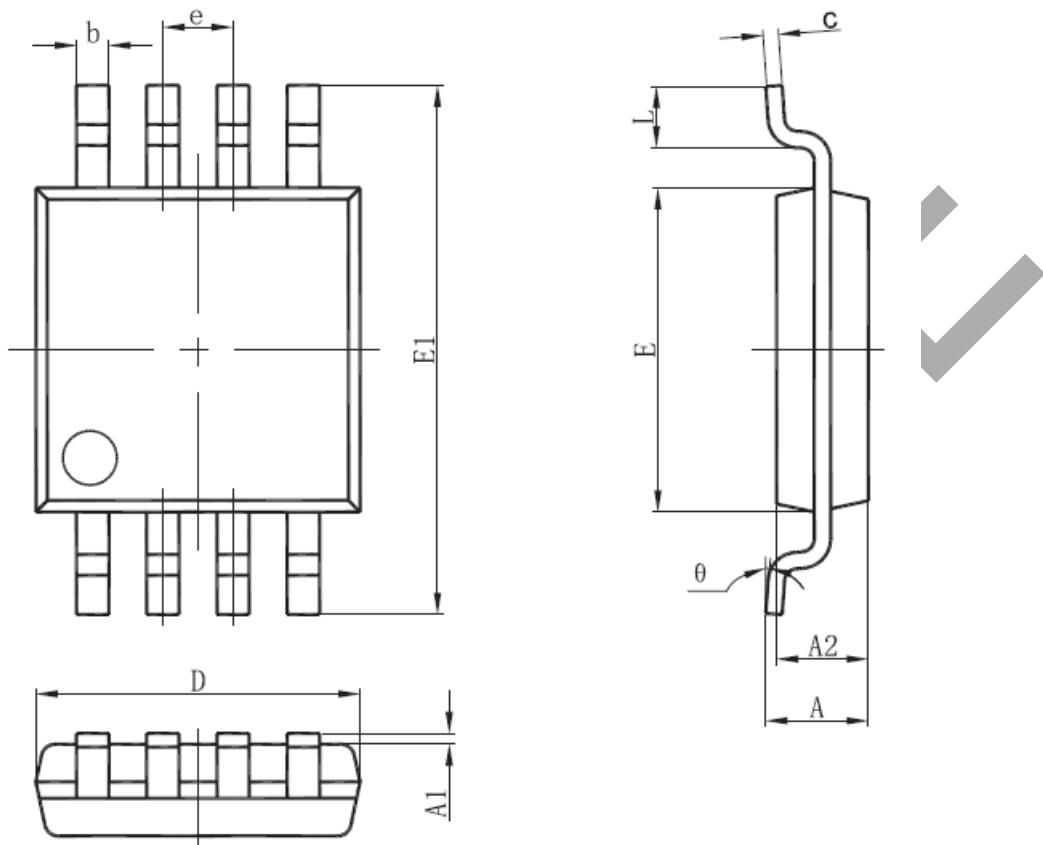


REF	Millimeter	
	Min	Max
A	--	1.10
A1	0.05	0.15
A2	0.78	0.94
b	0.22	0.38
c	0.08	0.23
D	2.90	3.10
E	2.90	3.10
E1	4.75	5.05
e	0.65BSC	
L	0.40	0.70

OBSOLETE - PART DISCONTINUED

Package Outline Dimensions (cont.) (All dimensions in mm.)

SOT23-8

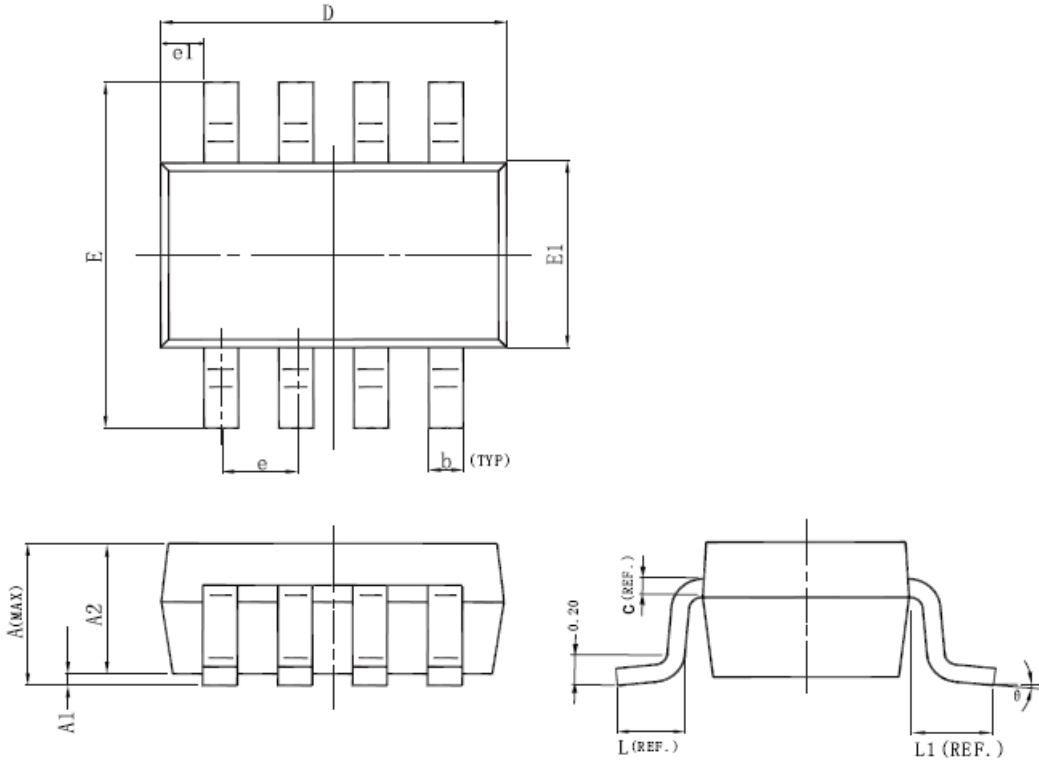


Symbol	Dimensions In Millimeters		Symbol	Dimensions In Millimeters	
	Min	Max		Min	Max
A	1.45 MAX		L	0.30	0.60
A1	0	0.10	L1	0.60 (REF)	
A2	1.10	1.30	θ	0°	10°
c	0.12 (REF)		b	0.22	0.38
D	2.70	3.10	e	0.65 (REF)	
E	2.60	3.00	e1	0.33 (REF)	
E1	1.40	1.80			

OBSOLETE - PART DISCONTINUED

Package Outline Dimensions (cont.) (All dimensions in mm.)

DFN2x2-8

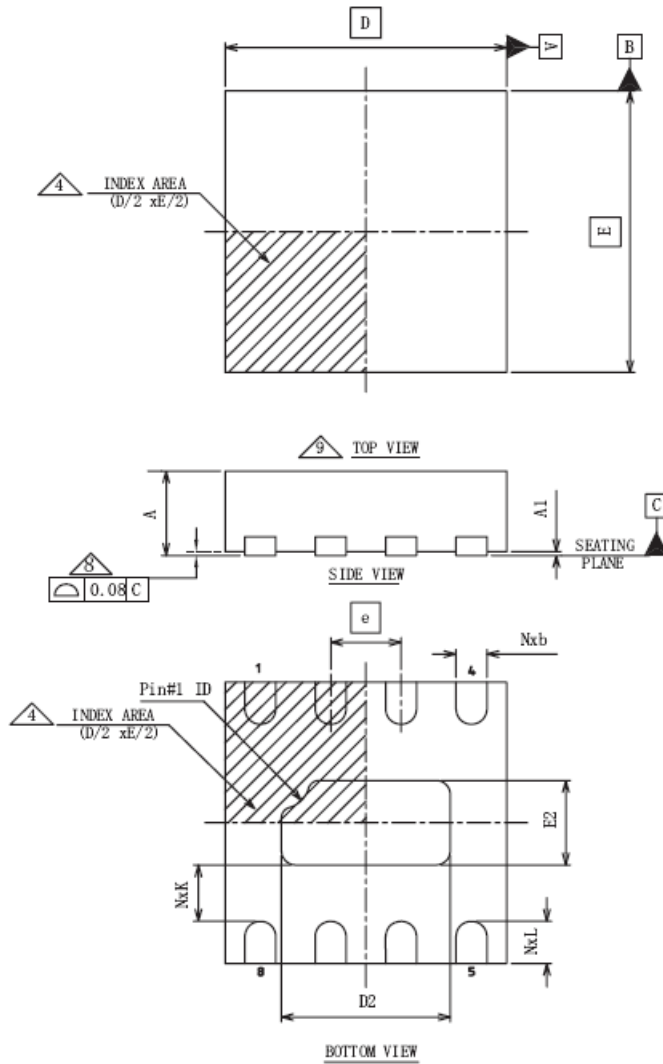

D BSC	2.00
E BSC	2.00
b	MIN 0.18
	NOM 0.25
	MAX 0.30
D2	MIN 1.05
	NOM 1.20
	MAX 1.30
E2	MIN 0.45
	NOM 0.60
	MAX 0.70
L	MIN 0.20
	NOM 0.30
	MAX 0.40
N	8

COMMON DIMENSION			
SYMBOL	MIN	NOM	MAX
A	0.70	0.75	0.80
A1	0.00	0.02	0.05

Summary Table			
Lead Pitch (e)	Lead Count	Body Size	Pin #1 ID
0.50	8	2X2	RO.20

Unit: Millimeters

IMPORTANT NOTICE

DIODES INCORPORATED MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARDS TO THIS DOCUMENT, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION).

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to this document and any product described herein. Diodes Incorporated does not assume any liability arising out of the application or use of this document or any product described herein; neither does Diodes Incorporated convey any license under its patent or trademark rights, nor the rights of others. Any Customer or user of this document or products described herein in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on Diodes Incorporated website, harmless against all damages.

Diodes Incorporated does not warrant or accept any liability whatsoever in respect of any products purchased through unauthorized sales channel. Should Customers purchase or use Diodes Incorporated products for any unintended or unauthorized application, Customers shall indemnify and hold Diodes Incorporated and its representatives harmless against all claims, damages, expenses, and attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized application.

Products described herein may be covered by one or more United States, international or foreign patents pending. Product names and markings noted herein may also be covered by one or more United States, international or foreign trademarks.

This document is written in English but may be translated into multiple languages for reference. Only the English version of this document is the final and determinative format released by Diodes Incorporated.

LIFE SUPPORT

Diodes Incorporated products are specifically not authorized for use as critical components in life support devices or systems without the express written approval of the Chief Executive Officer of Diodes Incorporated. As used herein:

A. Life support devices or systems are devices or systems which:

1. are intended to implant into the body, or
2. support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in significant injury to the user.

B. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or to affect its safety or effectiveness.

Customers represent that they have all necessary expertise in the safety and regulatory ramifications of their life support devices or systems, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of Diodes Incorporated products in such safety-critical, life support devices or systems, notwithstanding any devices- or systems-related information or support that may be provided by Diodes Incorporated. Further, Customers must fully indemnify Diodes Incorporated and its representatives against any damages arising out of the use of Diodes Incorporated products in such safety-critical, life support devices or systems.

Copyright © 2014, Diodes Incorporated

www.diodes.com