

# PRECISION 1.25 VOLT MICROPOWER VOLTAGE REFERENCE

ISSUE 3 - FEBRUARY 1998

ZR423

## DEVICE DESCRIPTION

The ZR423 uses a bandgap circuit design to achieve a precision micropower voltage reference of 1.25 volts. The device is available in a TO92 style package for through hole requirements.

The ZR423 design provides a stable voltage without an external capacitor and is stable with capacitive loads. The ZR423 is recommended for operation between 50 $\mu$ A and 5mA and so is ideally suited to low power and battery powered applications.

Excellent performance is maintained to an absolute maximum of 25mA, however the rugged design and 20 volt processing allows the reference to withstand transient effects and currents up to 200mA. Superior switching capability allows the device to reach stable operating conditions in only a few microseconds.


## FEATURES

- TO92 style package
- No stabilising capacitor required
- Typical  $T_c$  30ppm/ $^{\circ}$ C
- Typical slope resistance 0.65 $\Omega$
- $\pm 3\%$  tolerance
- Industrial temperature range (Military temperature range available on request)
- Operating current 50 $\mu$ A to 5mA
- Transient response, stable in less than 10 $\mu$ s
- Alternative package options and tolerances available

## APPLICATIONS

- Battery powered and portable equipment.
- Metering and measurement systems.
- Instrumentation.
- Data acquisition systems.
- Precision power supplies.

## SCHEMATIC DIAGRAM

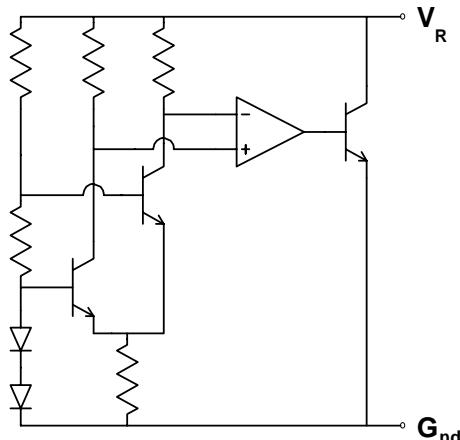

# ZR423

## ABSOLUTE MAXIMUM RATING

Reverse Current	25mA
Forward Current	25mA
Operating Temperature	-40 to 85°C
Storage Temperature	-55 to 125°C

## Power Dissipation ( $T_{amb}=25^{\circ}C$ )

E-Line, 2 pin (TO92) 500mW

## ELECTRICAL CHARACTERISTICS


TEST CONDITIONS (Unless otherwise stated)  $T_{amb}=25^{\circ}C$

SYMBOL	PARAMETER	CONDITIONS	LIMITS			TOL. %	UNITS
			MIN	TYP	MAX		
$V_R$	Reverse Breakdown Voltage	$I_R=150\mu A$	1.21	1.25	1.29	3	V
$I_{MIN}$	Minimum Operating Current			30	50		$\mu A$
$I_R$	Recommended Operating Current		0.05		5		mA
$T_C$ †	Average Reverse Breakdown Voltage Temp. Co.	$I_{R(min)}$ to $I_{R(max)}$		30	90		ppm/ $^{\circ}C$
$R_S$ §	Slope Resistance		0.65	2			$\Omega$
$Z_R$	Reverse Dynamic Impedance	$I_R = 1mA$ $f = 100Hz$ $I_{AC}=0.1 I_R$	0.5	1			$\Omega$
$E_N$	Wideband Noise Voltage	$I_R = 150\mu A$ $f = 100Hz$ to 10kHz	60				$\mu V(rms)$

$$\dagger \quad T_C = \frac{(V_{R(max)} - V_{R(min)}) \times 1000000}{V_R \times (T_{(max)} - T_{(min)})}$$


Note:  $V_{R(max)} - V_{R(min)}$  is the maximum deviation in reference voltage measured over the full operating temperature range.

$$\S \quad R_S = \frac{V_R \text{ Change}(I_R(\text{min}) \text{ to } I_R(\text{max}))}{I_R(\text{max}) - I_R(\text{min})}$$

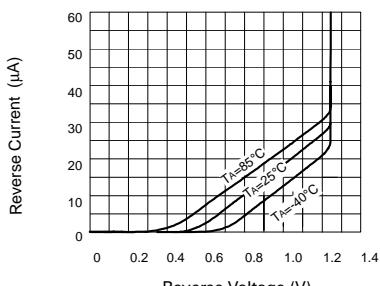

Reverse Characteristics


## TYPICAL CHARACTERISTICS

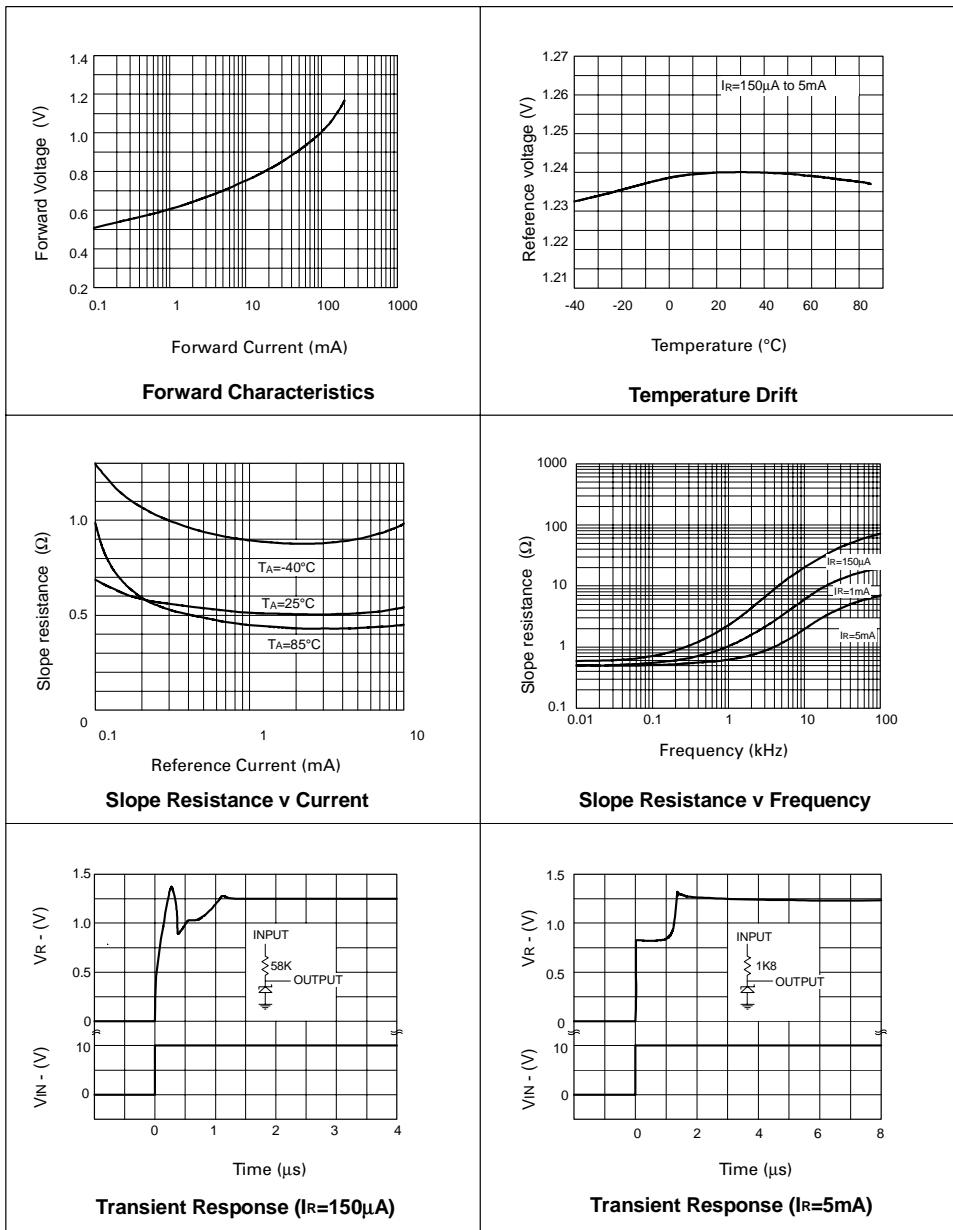

**ZR423**

## CONNECTION DIAGRAMS

E-Line, 2 pin, Package Suffix – Y



## ORDERING INFORMATION

Part Number	Tol%	Package	Partmark
ZR423	3	E-Line †	ZR423

† E-Line, 2 pin