

ZXT2M322

MPPS™ Miniature Package Power Solutions
20V PNP LOW SATURATION SWITCHING TRANSISTOR

SUMMARY
 $V_{CE0} = 20V$; $R_{SAT} = 64m\Omega$; $I_C = -3.5A$
DESCRIPTION

Packaged in the innovative 2mm x 2mm MLP (Micro Leaded Package) outline, this new 4th generation low saturation transistors offers extremely low on state losses making it ideal for use in DC-DC circuits and various driving and power management functions.

Additionally users will also gain several other **key benefits**:


Performance capability equivalent to much larger packages

Improved circuit efficiency & power levels

Lower package height (nom 0.9mm)

PCB area and device placement savings


Reduced component count



2mm x 2mm MLP
(single die)

FEATURES

- Low Equivalent On Resistance
- Extremely Low Saturation Voltage (-220mV @-1A)
- h_{FE} characterised up to -6A
- $I_C = -3.5A$ Continuous Collector Current
- 2mm x 2mm MLP

**APPLICATIONS**


- DC - DC Converters (FET Drivers)
- Charging Circuits
- Power switches
- Motor control

ORDERING INFORMATION

DEVICE	REEL	TAPE WIDTH	QUANTITY PER REEL
ZXT2M322TA	7''	8mm	3000
ZXT2M322TC	13''	8mm	10000

DEVICE MARKING

S2

PINOUT

2mm x 2mm Single MLP
underside view

ZXT2M322

ABSOLUTE MAXIMUM RATINGS.

PARAMETER	SYMBOL	LIMIT	UNIT
Collector-Base Voltage	V_{CBO}	-25	V
Collector-Emitter Voltage	V_{CEO}	-20	V
Emitter-Base Voltage	V_{EBO}	-7.5	V
Peak Pulse Current (c)	I_{CM}	-6	A
Continuous Collector Current (a)	I_C	-3.5	A
Base Current	I_B	-1000	mA
Power Dissipation at $T_A=25^\circ\text{C}$ (a)	P_D	1.5	W
Linear Derating Factor		12	mW/ $^\circ\text{C}$
Power Dissipation at $T_A=25^\circ\text{C}$ (b)	P_D	2.45	W
Linear Derating Factor		19.6	mW/ $^\circ\text{C}$
Power Dissipation at $T_A=25^\circ\text{C}$ (d)	P_D	1	W
Linear Derating Factor		8	mW/ $^\circ\text{C}$
Power Dissipation at $T_A=25^\circ\text{C}$ (e)	P_D	3	W
Linear Derating Factor		24	mW/ $^\circ\text{C}$
Operating and Storage Temperature Range	$T_j:T_{stg}$	-55 to +150	$^\circ\text{C}$

THERMAL RESISTANCE


PARAMETER	SYMBOL	VALUE	UNIT
Junction to Ambient (a)	$R_{\theta JA}$	83	$^\circ\text{C}/\text{W}$
Junction to Ambient (b)	$R_{\theta JA}$	51	$^\circ\text{C}/\text{W}$
Junction to Ambient (d)	$R_{\theta JA}$	125	$^\circ\text{C}/\text{W}$
Junction to Ambient (e)	$R_{\theta JA}$	42	$^\circ\text{C}/\text{W}$

NOTES

- (a) For a single device surface mounted on 10sq cm1oz copper on FR4 PCB in still air conditions **with all exposed pads attached**.
- (b) For a single device surface mounted on 10sq cm1oz copper on FR4 PCB in still air conditions measured at $t \leq 5$ secs **with all exposed pads attached**.
- (c) Repetitive rating - pulse width limited by max junction temperature. refer to Transient Thermal Impedance graph.
- (d) For a single device surface mounted on 10sq cm1oz copper on FR4 PCB in still air conditions **with minimal lead connections only**.
- (e) For a single device surface mounted on 65sq cm2oz copper on FR4 PCB in still air conditions **with all exposed pads attached**.
- (f) The minimum copper dimensions required for mounting are no smaller than the exposed metal pads on the base of the device, as shown in the package dimensions data. The thermal resistance for a device mounted on 1.5mm thick FR4 board using minimum copper of 1oz weight is $R_{th}=300^\circ\text{C}/\text{W}$ giving a power rating of $P_{tot}=420\text{mW}$.

ZXT2M322

CHARACTERISTICS

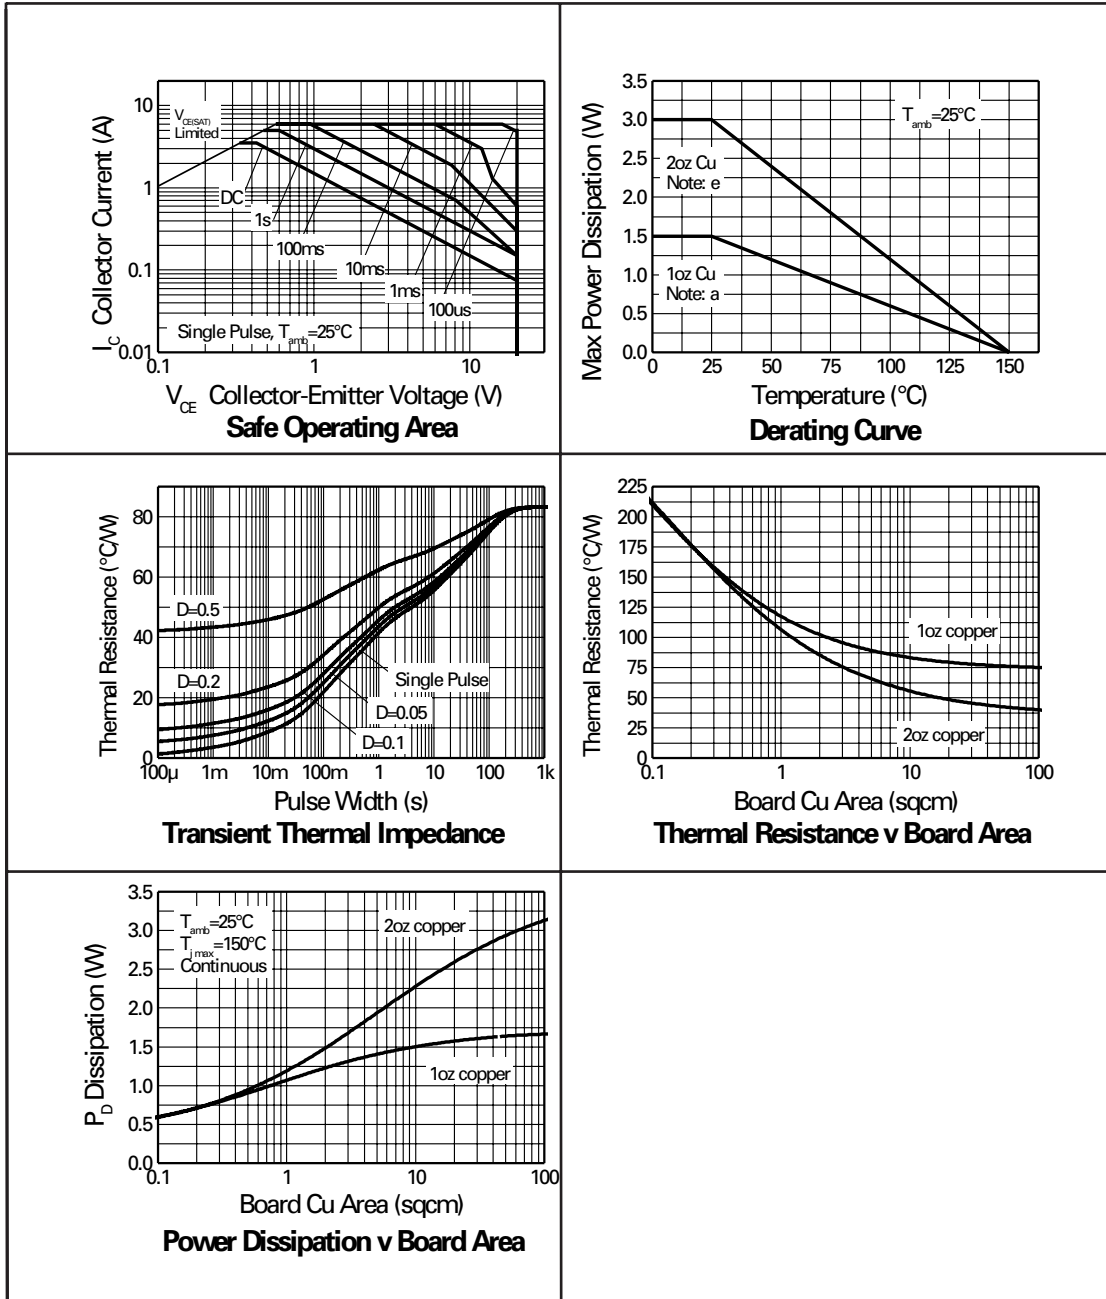

ZXT2M322


ELECTRICAL CHARACTERISTICS (at $T_{amb} = 25^{\circ}\text{C}$ unless otherwise stated).

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	CONDITIONS.
Collector-Base Breakdown Voltage	$V_{(BR)CBO}$	-25	-35		V	$I_C = -100\mu\text{A}$
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	-20	-25		V	$I_C = -10\text{mA}^*$
Emitter-Base Breakdown Voltage	$V_{(BR)EBO}$	-7.5	-8.5		V	$I_E = -100\mu\text{A}$
Collector Cut-Off Current	I_{CBO}			-25	nA	$V_{CB} = -20\text{V}$
Emitter Cut-Off Current	I_{EBO}			-25	nA	$V_{EB} = -6\text{V}$
Collector Emitter Cut-Off Current	I_{CES}			-25	nA	$V_{CES} = -16\text{V}$
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$		-19 -170 -190 -240 -225	-30 -220 -250 -350 -300	mV	$I_C = -0.1\text{A}, I_B = -10\text{mA}^*$ $I_C = -1\text{A}, I_B = -20\text{mA}^*$ $I_C = -1.5\text{A}, I_B = -50\text{mA}^*$ $I_C = -2.5\text{A}, I_B = -150\text{mA}^*$ $I_C = -3.5\text{A}, I_B = -350\text{mA}^*$
Base-Emitter Saturation Voltage	$V_{BE(sat)}$		-1.01	-1.075	V	$I_C = -3.5\text{A}, I_B = -350\text{mA}^*$
Base-Emitter Turn-On Voltage	$V_{BE(on)}$		-0.87	-0.95	V	$I_C = -3.5\text{A}, V_{CE} = -2\text{V}^*$
Static Forward Current Transfer Ratio	h_{FE}	300 300 150 15	475 450 230 30			$I_C = -10\text{mA}, V_{CE} = -2\text{V}^*$ $I_C = -0.1\text{A}, V_{CE} = -2\text{V}^*$ $I_C = -2\text{A}, V_{CE} = -2\text{V}^*$ $I_C = -6\text{A}, V_{CE} = -2\text{V}^*$
Transition Frequency	f_T	150	180		MHz	$I_C = -50\text{mA}, V_{CE} = -10\text{V}$ $f = 100\text{MHz}$
Output Capacitance	C_{obo}		21	30	pF	$V_{CB} = -10\text{V}, f = 1\text{MHz}$
Turn-On Time	$t_{(on)}$		40		ns	$V_{CC} = -10\text{V}, I_C = -1\text{A}$
Turn-Off Time	$t_{(off)}$		670		ns	$I_{B1} = I_{B2} = 10\text{mA}$

*Measured under pulsed conditions. Pulse width=300 μs . Duty cycle $\leq 2\%$


ZXT2M322

CHARACTERISTICS

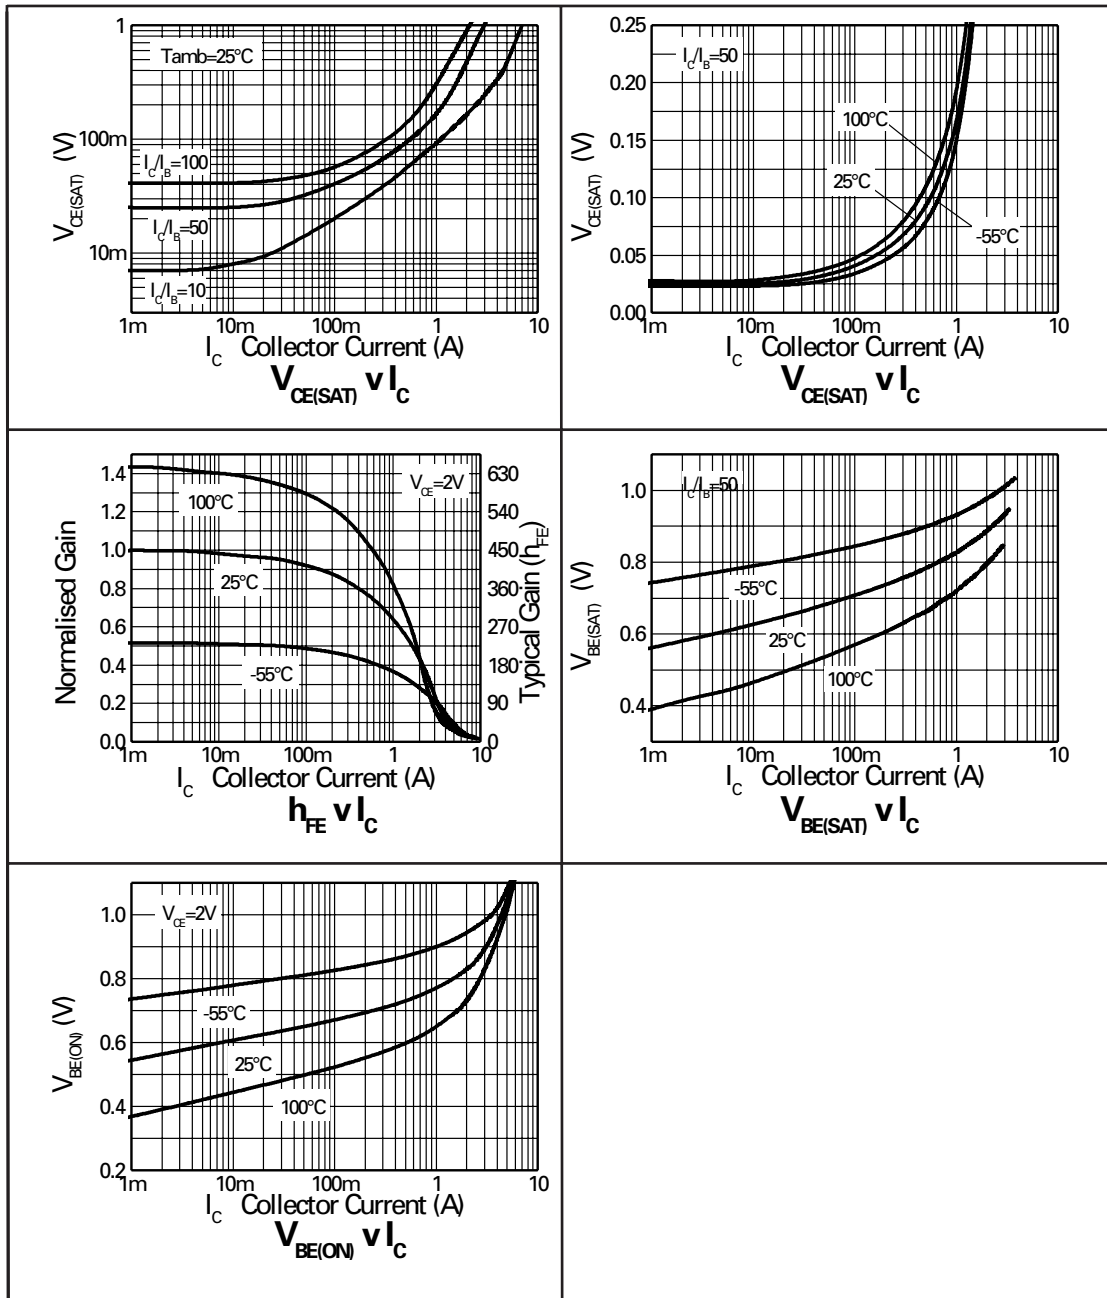

ZXT2M322

MLP322 PACKAGE OUTLINE (2mm x 2mm Micro Leaded Package)

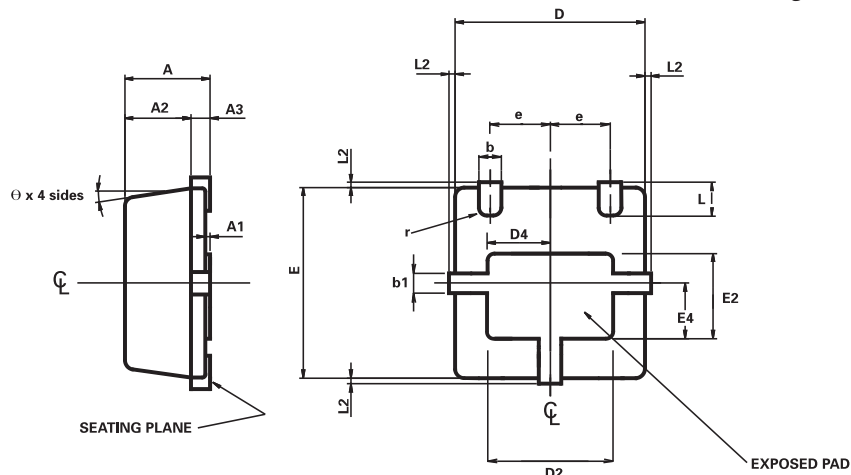

CONTROLLING DIMENSIONS IN MILLIMETRES
APPROX. CONVERTED DIMENSIONS IN INCHES

PACKAGE DIMENSIONS

DIM	MILLIMETRES		INCHES		DIM	MILLIMETRES		INCHES	
	MIN.	MAX.	MIN.	MAX.		MIN.	MAX.	MIN.	MAX.
A	0.80	1.00	0.0315	0.0393	e	0.65 REF		0.0255 REF	
A1	0.00	0.05	0.00	0.002	E	2.00 BSC		0.0787 BSC	
A2	0.65	0.75	0.0255	0.0295	E2	0.79	0.99	0.031	0.039
A3	0.15	0.25	0.0059	0.0098	E4	0.48	0.68	0.0188	0.0267
b	0.18	0.28	0.0070	0.0110	L	0.20	0.45	0.0078	0.0177
b1	0.17	0.30	0.0066	0.0118	L2	0.125 MAX.		0.005 REF	
D	2.00 BSC		0.0787 BSC		r	0.075 BSC		0.0029 BSC	
D2	1.22	1.42	0.0480	0.0559	θ	0°	12°	0°	12°
D4	0.56	0.76	0.0220	0.0299					

© Zetex Semiconductors plc 2007

Europe	Americas	Asia Pacific	Corporate Headquarters
Zetex GmbH Balan-straße 59 D-81541 München	Zetex Inc 700 Veterans Memorial Hwy Hauppauge, NY11788	Zetex (Asia) Ltd 3701-04 Metroplaza, Tower 1 Hing Fong Road Kwai Fong Hong Kong Telephone: (852) 26100 611 Fax: (852) 24250 494 asia.sales@zetex.com	Zetex Semiconductors plc Zetex Technology Park Chadderton Oldham, OL9 9LL United Kingdom Tel: (44) 161 622 4444 Fax: (44) 161 622 4446 hq@zetex.com
Germany Telefon: (49) 89 45 49 49 0 Fax: (49) 89 45 49 49 49 europe.sales@zetex.com	USA Telephone: (631) 360 2222 Fax: (631) 360 8222 usa.sales@zetex.com		

These offices are supported by agents and distributors in major countries world-wide.

This publication is issued to provide outline information only which (unless agreed by the Company in writing) may not be used, applied or reproduced for any purpose or form part of any order or contract or be regarded as a representation relating to the products or services concerned. The Company reserves the right to alter without notice the specification, design, price or conditions of supply of any product or service.

For the latest product information, log on to www.zetex.com



ISSUE 3 - JANUARY 2007